

 **FORSAFLEX<sup>®</sup>**

---

**Industrial Hose & Fittings Catalog**

# TABLE OF CONTENTS

Series	Hose	Page
<b>1 AIR &amp; MULTIPURPOSE HOSE</b>		
AH10	EPDM General Purpose	1
AH11	Black General Purpose Air-Water	2
AH20	Multipurpose ORNC - 300	3
AH30	Multipurpose ORNC	4
AH15	Jackhammer Hose	5
AH32	Arctic PVC Air Hose	6
AB9603	Breathing Air	7
BA10-038	Breathing Air	7
PL10	Push Lock 300 PSI	8
AH55	Recoil Hose Assemblies	8
AH60	Steel Air Hose 600	9
AH61	Steel Air Hose - High Temp (R&D)	9
AH65	Extra Service 400 Air	10
AH67	Contractors Air 300	11
<b>2 AUTO, TRUCK &amp; MARINE HOSE</b>		
AT10	EPDM Heater Hose - Standard	12
AT16	Silicone Heater Hose	12
AT29	Silicone Coolant Hose	13
AB10	Air Brake Hose	14
AT50	Fuel Line Hose	14
1485	Air Brake Tubing - D.O.T.	15
MXH	Marine Exhaust Hardwall	16
MXS	Marine Exhaust Softwall	17
MFH	Marine Fuel Fill - Hardwall	18
<b>3 CHEMICAL HOSE</b>		
CH12	UHMW Chemical Hose DEF	19
CH22	PTFE - Chemical	20
CH30	Weed Spray	20
TBR	Smooth Bore Teflon/Stainless Steel Wire	21
TBX	Convuluted Smooth Bore Teflon Stainless	21
<b>4 COMPOSITE HOSE &amp; FITTINGS</b>		
CP25	Composite - Chemical Hose (PG)	22
CP45	Composite - PTFE Hose (SS)	22
CP30	Composite - Petroleum Hose (GG)	23
CP35	Composite - Fuel/Vapor Hose (AG)	23
CP60	Composite - Oil & Water Hose (GG)	24
CP	Composite - Fittings	25
<b>5 DEF HOSE &amp; FITTINGS</b>		
DF11	Diesel Exhaust Fluid (DEF)	27
CH12	UHMW Chemical Hose DEF	27
DEF	316 Stainless Steel Fittings	28
<b>6 DUCTING &amp; VACUUM</b>		
DV10	TPR-W	29
DV22	Urethane Clear - MD	30
DV35	Cuffs	31
DV30	Standard VAC (Z VAC)	31
DV40	Commercial VAC (G VAC)	31
DV38	Joiner	31

Series	Hose	Page
<b>7 FOOD HOSE</b>		
FT41	Food Grade PVC Clearbraid	32
FT45	Food Grade PVC - Oil	32
FT44	Clear Food Grade PVC	33
FT10	Nitrile Food - Potable Water Hose	34
WD40	Potable Water Hose	34
<b>8 HIGH PRESSURE CLEANING</b>		
PW4/6	High Pressure Cleaning	35
SK20	Steam Cleaner/Pressure Wash Hose	36
WBD	Waterblast Hose	37
QWB/QWS	Waterblast Quick Disconnects	38
SCH	Sewer Cleaning Hose	39
<b>9 MATERIAL TRANSFER</b>		
MT10	Thunderblast® Sandblast Hose - 4ply	40
MT11	Compact Thunderblast® Sandblast Hose - 2 Ply	41
CN10	Eaglecrete® Textile Placement	42
CN20	Eaglecrete® Wire Placement	43
CN25	Guniting Hose	44
CN30	Flexcrete® Mortar TPU Hose	44
MT30	Dry Material Discharge Hose	45
MT35	Hot Air Blower	45
MT50	Mine Corrugated Material Transfer	46
MT60/MT61	Industrial Vacuum - PU	47
MT65	Industrial Vacuum 180AR	47
MT67	Industrial Vacuum High Temp 180HR	48
MT70	Bulkmaster Hardwall Suction Hose	49
MT71	Eagle Vac Suction Hose	49
<b>10 METAL HOSE</b>		
MHB60	Stainless Steel Metal Hose - Double Braid	50
	Metal Hose Temperature Derating	51

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT NOTICE.



# TABLE OF CONTENTS

Series	Hose	Page	Series	Coupling	Page
<b>11 PETROLEUM HOSE</b>			<b>15 WATER SUCTION HOSE</b>		
PH10	Oilflex® Tank Truck	52	WS50	HD Rubber Water Suction & Discharge	90
PH14	Smooth Tank Truck- SAE 100R4	52	WS52	Premium EPDM Suction Hose	92
PH15	Arctic Tank Truck	53	WS60	Green PVC Suction Hose	93
PH16	Extra-Flex Arctic Tank Truck	53	WS62	Clear/White PVC Suction Hose	94
PH19	HD Tank Truck Hose 300	54	WS64	Cold Temp PVC Suction Hose	95
PH22	TPR Rubber Drop Hose (Infinity HD Type)	55	WS65	HD PVC Suction (SR Style)	96
PH23	TPR Orange/Black Gravity Drop Hose	55	WS62	Air Seeder	97
PH21	PU Clear Tank Drop Hose	56	KURD	Polyurethane Air Seeder	97
PH44	Vapor Recovery Hose	56	WS80	EPDM Suction Hose	98
PH25	Frac Hose	57	WS75	Honey Bee Suction Hose	99
PH27	Hot Tar & Asphalt	57	<b>16 ACCESSORIES</b>		
PH40	EagleFlo® Curb Pump Hose - UL 330	58	WHIP	Whip Checks	100
PH42	Farm Tank Hose	59	KSW	Whipsock	100
PH45	Wrapped Arctic Fuel Delivery Hose	60	HH/HHS	Nylon Whip Checks	101
PH46	Smooth Arctic Blue Fuel Delivery Hose	61	BG	Safety Blow Guns	102
PH48	Smooth Red Fuel Delivery Hose	62	PL	In Line Lubricators	102
PH50	Arctic Fuel Delivery Hose - UL 330	63	HB	Hosebun™	103
PH60	Oil Service S&D Cargo Hose	64		EZBUN®	103
PH70	Eagle Flight® Aircraft Fueling Hose	65	PGCD/PGDS	Dry Stabilizer Gauges - Vibration Control	104
BOP	5,000 PSI Four Wire	66	PGD	Dry Gauge - Standard	104
LP10	CSA/UL Type 1 Propane - NG	67	PGCL/PGL	Liquid Filled Gauges	105
LP15/LP20	CSA/UL Propane - NG	68	PG	Digital Pressure Gauges	106
LP30	CSA/UL Type III Propane - NG Hose	69	PGL	Gauge Accessories	106
HN	Compact 100R4 Suction / Return Hose	70	NS	Nylon Sleaving	107
<b>12 SPECIALTY HOSE</b>			NSV	Nylon Sleeve - Velcro	107
FE10	Fire Engine Draftflex™	71	PWMD/PWHD	Plastic Wrap	108
FE20	Fire Engine Booster	72	TCS/TCH	Tube Clamps - Single, Twin, & Heavy	109
WD35	Forestry Hose Assemblies - Universal Forestry Ends	72	G	Hose Cutter	111
AH80	Mine Spray Hose 1000	73	Caliper	Caliper	111
<b>13 STEAM HOSE</b>			ID101	ID Tags	111
SH10	EPDM Steam Hose - Bolt Clamps	74	Cable-tie	Cable Tie/Cable Tie Gun	111
SH15	EPDM Steam Hose - Crimp Fittings	74		Colored Preform Clamps	111
	STEAM HOSE SAFETY RECOMMENDATIONS	75	HR-20A-W	Hose Rack with wheels	112
<b>14 WATER DISCHARGE HOSE</b>			<b>17 AIR FITTINGS</b>		
PGH	The Perfect Garden Hose®	76	U	Universal / Chicago	113
GH10	Golf Course Hose	77	QM	DIX-LOK	114
WD10	Blue PVC Layflat	78	PHL	Thor	114
WD12	Gray PVC Layflat	79	GJ/MH	Ground Joints - Mine Stems	115
WD13	Brown Pvc Layflat	80	B/BU	Ground Joint Clamps	116
WD14	HD Red PVC Layflat	81	<b>18 BAUER STYLE FITTINGS</b>		
WD15	HIVIZ Green PVC Layflat (Phthalate Free) 150	82	BL	Bauer - Type B	117
WD20	Nitrile Discharge	83	BLA	Bauer - Type A	120
WD95	TPU Water Discharge Hose	84	<b>19 BRASS FITTINGS</b>		
WD30	Heavy-Duty Chiller/Water Discharge Hose - 150	85		Brass Pipe Fittings Pictorial Index	121
WD32	Water Jetting 800	86	D	Brass Fittings	122
WD35/WD38	SJ/DJ Industrial Mill Discharge	87	B	Garden Hose Fittings	126
WD45	Avalanche Snowmaking	88	PL	Push-Lok Brass Fittings	127
WD70	White Hot Water Washdown Hose	89	PC	Push-To-Connect D.O.T. Air Brake Fittings - Tubing	129
			D.O.T.	Air Brake Coupling - Hose	130

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT NOTICE.

# TABLE OF CONTENTS

Series	Coupling	Page
<b>20 BUSH HOGS</b>		
	Bush Hogs	132
<b>21 CAMLOCKS</b>		
A/B/C	Standard Camlocks	133
RL	Ring Lok Camlocks	137
AL-SS	Camlock Adapters	139
SB/SL	Safety Bumps	141
SL	Sight Glass	141
	Camlock Safety Straps	141
CG	Camlock Gaskets	142
	Camlock Working Pressure	142
<b>22 CLAMPS</b>		
SBC/DC/DBC	Clamps	143
P	Preformed Punch-Type Clamps	144
PB	Strapping & Buckles	145
W2	Mikalor HD T-Bolt Clamps	146
W2-CT	Constant Tension	147
W2-AL/AS	Worm Gear ASFA	148
GCM	Micro Gear Clamps	149
GC	Worm Gear Clamps	149
	Oetiker 2-Ear Clamps/Pincers	150
<b>23 CRIMP SLEEVES &amp; FERRULES</b>		
CS	Crimp Sleeves	151
CF	Crimp Ferrules	153
CF-L	Crimp Ferrules (Long)	154
BFM	Brass Ferrules	155
<b>24 FIRE &amp; HYDRANT</b>		
A91	Hydrant Adapters	156
	FNB Nozzles	156
HGV/HF100	Hydrant Valves	156
<b>25 GROOVED FITTINGS</b>		
GXX	Grooved Fittings (Victaulic)	157
<b>26 HIGH PRESSURE CLEANING</b>		
PW-18	Pressure Gun/Lance/Accessories	159
QST	Straight Through Couplings	160
QWB/QWS	Waterblast Push/Screw to Connect	161
<b>27 HOSE SHANKS &amp; STRAINERS</b>		
CNT	Combination Nipples	162
CNT-CF	Combination Nipples - Crimp	162
CAB	Short Shanks	164
FV	Foot Valves & Gaskets	164
RHS/SHS	Strainers	165
<b>28 MATERIAL TRANSFER COUPLINGS</b>		
SQC/SNH	Sandblast Couplings	166
HUT(FC)	Frac Couplings	167

Series	Coupling	Page
<b>29 PETROLEUM FITTINGS</b>		
GP/UL	PH45/50 Crimp Couplings	168
GP	Gas Pump Fittings	168
SCM/SCF	Internal Expansion Couplings - Scovill Style	169
MC	Fuel Hose Nozzles/Swivels	170
<b>30 PIPE &amp; HAMMER UNIONS</b>		
	Pipe Pictorial Index	172
M100	Black Iron SCH 40	173
FL	Flange 150 Lbs.	179
HUT	Hammer Unions	181
<b>31 QUICK DISCONNECTS PNEUMATIC</b>		
QD	Industrial Interchange - Type D	182
QAR	ARO Interchange - Type AR	183
QT	Automotive Interchange - Type T	184
QL	Long Lincoln Interchange - Type L	185
QY	Universal - Type U	185
	Pneumatic Profiles	186
	Pneumatic Quick Disconnect - Interchange Guide	187
<b>32 VALVES</b>		
BV	Ball Valves	190
BV-HPN	High Pressure Ball Valves	191
LGV/SGV	Lever/Stem Valves	192
CVA/GVA	Check Valves/Gate Valves	192
FLCV	Flanged Check Valve	193
FLGV	Flanged Gate Valve	193
FMB	Flow Meter	193
FLKGV	Flanged Knife Gate Valve	193
FLBFW	Butterfly Wafer Style Valve	193
FLBFL	Butterfly Valve Lug Style	193
<b>33 CHEMICAL RESISTANCE GUIDE</b>		
	Chemical Resistance Guide	194

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT NOTICE.



1



## AH10 EPDM General Purpose

- Tube: Black EPDM, ARPM Class C
- Reinforcement: Synthetic fiber
- Cover: Red abrasion and weather resistant rubber, ARPM Class C
- Temperature: -40°F to +210°F (-40°C to +99°C)
- Application: Flexible, lightweight hose for air, water, mild chemicals in construction, quarries & agriculture
- Vacuum: Not Recommended
- Safety Factor: 4:1
- Branding: FORSAFLEX AH10-100 1" EPDM GENERAL PURPOSE AIR - WATER HOSE 300 PSI MAX WP

Part #	Cover	ID	OD		Max WP	Min BR	Weight	Standard Pack
		in	in	mm	psi	in	lbs/ft	
AH10-025	Red	1/4	0.49	12.4	300	1.50	0.13	500' - Reel
AH10-038	Red	3/8	0.65	16.5	300	2.25	0.23	500' - Reel
AH10-050	Red	1/2	0.82	20.7	300	3.60	0.32	500' - Reel
AH10-063	Red	5/8	0.94	23.9	300	3.75	0.39	500' - Reel
AH10-075	Red	3/4	1.11	28.1	300	4.50	0.50	500' - Reel
AH10BL-075	Blue	3/4	1.11	28.1	300	4.50	0.50	500' - Reel
AH10GN-075	Green	3/4	1.11	28.1	300	4.50	0.50	500' - Reel
AH10-100	Red	1	1.39	35.4	300	6.00	0.73	100'/400' - Reel
AH10-125	Red	1-1/4	1.72	43.8	200	7.50	1.04	400' - Reel
AH10-150	Red	1-1/2	1.97	50.1	200	9.00	1.23	300' - Reel

## AH10 Red EPDM Assemblies



NPT xNPT

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
AH10-025MM050	1/4	1/4 - Male - NPT	1/4 - Male - NPT	50	Crimp
AH10-038M2525M025	3/8	1/4 - Male - NPT	1/4 - Male - NPT	25	Crimp
AH10-038M2525M050	3/8	1/4 - Male - NPT	1/4 - Male - NPT	50	Crimp
AH10-038M2525M100	3/8	1/4 - Male - NPT	1/4 - Male - NPT	100	Crimp
AH10-038MM050	3/8	3/8 - Male - NPT	3/8 - Male - NPT	50	Crimp
AH10-038MM100	3/8	3/8 - Male - NPT	3/8 - Male - NPT	100	Crimp
AH10-050M3838M050	1/2	3/8 - Male - NPT	3/8 - Male - NPT	50	Crimp

\* Other lengths and fitting combinations are available.

- WARNING!**
- Working pressures are calculated at 70 F° degrees. Maximum working pressure decreases as temperature increases.
  - Never exceed the maximum working pressure of the lowest rated component in the assembly.





## AH11 Black General Purpose Air-Water

- Tube:** Black synthetic rubber
- Reinforcement:** Synthetic fiber
- Cover:** Smooth black, abrasion and weather resistant rubber
- Temperature:** -22°F to +167°F (-30°C to +75°C)
- Application:** Air/water discharge for industrial, construction, and agricultural use
- Vacuum:** Not Recommended
- Branding:** FORSAFLEX AH11-063 CONTRACTOR WATER HOSE 5/8" ID 150 PSI WP

1

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
AH11-050	1/2	0.78	19.8	150	3.80	0.17	500' - Reel
AH11-063	5/8	0.93	23.6	150	5.00	0.26	500' - Reel
AH11-063-1500	5/8	1.00	25.4	200	6.30	0.29	1,500' - Reel
AH11-075	3/4	1.08	27.4	150	7.50	0.33	500' - Reel
AH11-100	1	1.39	35.3	150	10.00	0.52	450' - Reel
AH11-125	1-1/4	1.63	41.3	150	12.50	0.57	400' - Reel
AH11-150	1-1/2	1.88	47.8	150	15.00	0.68	300' - Reel

## AH11 Black General Purpose Air-Water Assemblies



GHT M x F

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
AH11-050GHT050	1/2	M-GHT	F-GHT	50	Crimp
AH11-050GHT100	1/2	M-GHT	F-GHT	100	Crimp
AH11-063GHT050	5/8	M-GHT	F-GHT	50	Crimp
AH11-063GHT100	5/8	M-GHT	F-GHT	100	Crimp
AH11-075GHT050	3/4	M-GHT	F-GHT	50	Crimp
AH11-075GHT100	3/4	M-GHT	F-GHT	100	Crimp

\* Other lengths and fitting combinations are available.

- WARNING!**
- Working pressures are calculated at 70 F° degrees. Maximum working pressure decreases as temperature increases.
  - The temperature of the medium must be lower than its boiling point.



## AH20 Multipurpose ORNC - 300



- Tube: Black Nitrile - ARPM class A
- Reinforcement: Synthetic fiber
- Cover: Red abrasion and weather resistant rubber - ARPM class B
- Temperature: -30°F to +210°F (-35°C to +99°C)
- Application: Multipurpose hose for industrial air service, compressor lines, pneumatic tools, and oil resistance
- Vacuum: Not Recommended
- Safety Factor: 4:1
- Branding: FORSAFLEX AH20-100 1" MULTIPURPOSE OIL RESISTANT NON-CONDUCTIVE 300 PSI MAX WP

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
AH20-025	1/4	0.49	12.4	300	1.50	0.13	500' - Reel
AH20-031	5/16	0.59	15.0	300	1.90	0.18	500' - Reel
AH20-038	3/8	0.65	16.5	300	2.25	0.23	500' - Reel
AH20-050	1/2	0.82	20.7	300	3.60	0.32	500' - Reel
AH20-063	5/8	0.94	23.9	300	3.75	0.39	500' - Reel
AH20-075	3/4	1.11	28.1	300	4.50	0.50	500' - Reel
AH20-100	1	1.39	35.4	300	6.00	0.73	400' - Reel
AH20-125	1-1/4	1.72	43.8	250	7.50	1.04	400' - Reel
AH20-150	1-1/2	1.97	50.1	250	9.00	1.23	300' - Reel

## AH20 Red Oil Resistant Assemblies



NPT xNPT

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
AH20-025MM050	1/4	1/4 - Male - NPT	1/4 - Male - NPT	50	Crimp
AH20-038M2525M025	3/8	1/4 - Male - NPT	1/4 - Male - NPT	25	Crimp
AH20-038M2525M050	3/8	1/4 - Male - NPT	1/4 - Male - NPT	50	Crimp
AH20-038M2525M100	3/8	1/4 - Male - NPT	1/4 - Male - NPT	100	Crimp
AH20-038MM050	3/8	3/8 - Male - NPT	3/8 - Male - NPT	50	Crimp
AH20-038MM100	3/8	3/8 - Male - NPT	3/8 - Male - NPT	100	Crimp
AH20-050M3838M050	1/2	3/8 - Male - NPT	3/8 - Male - NPT	50	Crimp

\* Other lengths and fitting combinations are available.

### WARNING!



Working pressures are calculated at 70 F° degrees. Maximum working pressure decreases as temperature increases.  
Never exceed the maximum working pressure of the lowest rated component in the assembly.



## AH30 Multipurpose ORNC

- Tube:** Black Nitrile, ARPM Class A
- Reinforcement:** Synthetic fiber
- Cover:** Smooth Red NBR blend, ARPM Class B
- Temperature:** -20°F to +210°F (-29°C to +99°C)
- Application:** Multipurpose hose for oil-resistant pneumatic tools and compressor lines, non-conductive
- Vacuum:** Not Recommended
- Safety Factor:** 4:1
- Branding:** FORSAFLEX AH30-100 1" MULTIPURPOSE NON-CONDUCTIVE 300 PSI MAX WP

1

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
AH30-025	1/4	0.54	13.7	300	2.50	0.14	500' - Reel
AH30-031	5/16	0.64	16.3	300	3.10	0.18	500' - Reel
AH30-038	3/8	0.69	17.5	300	3.80	0.19	500' - Reel
AH30-050	1/2	0.86	21.8	300	5.00	0.26	500' - Reel
AH30-063	5/8	1.02	25.9	300	6.30	0.33	500' - Reel
AH30-075	3/4	1.19	30.2	300	7.50	0.42	500' - Reel
AH30-100	1	1.50	38.1	300	10.00	0.62	450' - Reel
AH30-125	1-1/4	1.77	45.6	250	12.50	0.84	400' - Reel
AH30-150	1-1/2	2.08	53.2	250	15.00	1.01	300' - Reel

## AH30 Multipurpose Non-Conductive Assemblies



NPT x NPT

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
AH30-025MM025	1/4	1/4 - Male - NPT	1/4 - Male - NPT	25	Crimp
AH30-025MM050	1/4	1/4 - Male - NPT	1/4 - Male - NPT	50	Crimp
AH30-038M2525M025	3/8	1/4 - Male - NPT	1/4 - Male - NPT	25	Crimp
AH30-038M2525M050	3/8	1/4 - Male - NPT	1/4 - Male - NPT	50	Crimp
AH30-038M2525M100	3/8	1/4 - Male - NPT	1/4 - Male - NPT	100	Crimp
AH30-038MM025	3/8	3/8 - Male - NPT	3/8 - Male - NPT	25	Crimp
AH30-038MM050	3/8	3/8 - Male - NPT	3/8 - Male - NPT	50	Crimp
AH30-038MM100	3/8	3/8 - Male - NPT	3/8 - Male - NPT	100	Crimp
AH30-050-M3838M050	1/2	3/8" - Male - NPT	3/8" - Male - NPT	50	Crimp

\* Other lengths and fitting combinations are available.

**WARNING!** Working pressures are calculated at 70 F° degrees. Maximum working pressure decreases as temperature increases. Never exceed the maximum working pressure of the lowest rated component in the assembly.



1



## AH15 Jackhammer Hose

- Tube: Black synthetic rubber, oil mist resistant, ARPM Class B
- Reinforcement: Synthetic fiber
- Cover: Yellow/Red smooth abrasion resistant rubber, ARPM Class C
- Temperature: -30°F to +95°F (-35°C to +90°C)
- Application: Excellent performer in industrial, rental and construction industries
- Vacuum: Not Recommended
- Branding: FORSAFLEX AH15-075 3/4" JACKHAMMER HOSE 300 PSI MAX WP

Part #	Cover	ID	OD		Max WP	Weight	Standard Pack
		in	in	mm	psi	lbs/ft	
AH15YW-075	Yellow	3/4	1.14	29.0	300	0.35	500' - Reel / 50' - Coil
AH15RD-075	Red	3/4	1.14	29.0	300	0.35	500' - Reel / 50' - Coil

## AH15 Jackhammer Assemblies



Universal

Part #	Color	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
AH15YW-075UU050	Yellow	3/4	Universal	Universal	50	Crimp
AH15YW-075QQ050	Yellow	3/4	DIX-LOK	DIX-LOK	50	Crimp
AH15RD-075UU050	Red	3/4	Universal	Universal	50	Crimp
AH15RD-075QQ050	Red	3/4	DIX-LOK	DIX-LOK	50	Crimp

\* Other lengths and fitting combinations are available.



Dix-Lok

**WARNING!** Working pressures are calculated at 70 F° degrees. Maximum working pressure decreases as temperature increases. Never exceed the maximum working pressure of the lowest rated component in the assembly.





## AH32 Arctic PVC Air Hose

- Tube:** Low temperature PVC compound
- Reinforcement:** Synthetic fiber
- Cover:** Low temperature PVC compound
- Temperature:** -65°F to +150°F (-54°C to +65°C)
- Application:** Extremely flexible high quality lightweight hose for general shop and air tool use
- Vacuum:** Not Recommended

1

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
AH32B-025	1/4	0.50	12.7	300	0.08	500' - Reel
AH32B-038	3/8	0.63	16.0	300	0.10	500' - Reel
AH32B-050	1/2	0.78	19.8	300	0.15	500' - Reel

## AH32 Arctic PVC Assemblies



NPT x NPT

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
AH32B-025MM050	1/4	1/4 - Male - NPT	1/4 - Male - NPT	50	Crimp
AH32B-038M2525M025	3/8	1/4 - Male - NPT	1/4 - Male - NPT	25	Crimp
AH32B-038M2525M050	3/8	1/4 - Male - NPT	1/4 - Male - NPT	50	Crimp
AH32B-038M2525M100	3/8	1/4 - Male - NPT	1/4 - Male - NPT	100	Crimp
AH32B-038MM025	3/8	3/8 - Male - NPT	3/8 - Male - NPT	25	Crimp
AH32B-038MM050	3/8	3/8 - Male - NPT	3/8 - Male - NPT	50	Crimp
AH32B-038MM100	3/8	3/8 - Male - NPT	3/8 - Male - NPT	100	Crimp
AH32B-050MM050	1/2	1/2 - Male - NPT	1/2 - Male - NPT	50	Crimp
AH30-050-M3838M050	1/2	3/8 - Male - NPT	3/8 - Male - NPT	50	Crimp

\* Other lengths and fitting combinations are available.

\* B - Blue, Y - Yellow

**WARNING!**



Working pressures are calculated at 70 F° degrees. Maximum working pressure decreases as temperature increases.  
 Never exceed the maximum working pressure of the lowest rated component in the assembly.



## AB9603 Breathing Air

- Tube: White low odor, food grade PVC
- Reinforcement: Synthetic fiber
- Cover: Black PVC with a blue stripe
- Temperature: -26°F to +150°F (-40°C to +40°C)
- Application: This hose satisfies the NIOSH Air-Supply-Line requirements and tests of Type-C Respirators as described in Table 8 to 42 CFR Part 84, subpart J including the test for permeation of hose by gasoline. The hose also meets the requirements of section 25, ASTM D380-94(2006), Low temperature test on the complete hose assembly. This hose is also approved for sale in Alberta.

1

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
AB9603-04	1/4	0.59	14.9	400	0.12	500' - Reel
AB9603-06	3/8	0.75	19.0	300	0.19	500' - Reel



## BA10-038 Breathing Air

- Tube: Clear low odor, food grade PVC
- Reinforcement: Synthetic fiber
- Cover: Black PVC
- Temperature: -15°F to +150°F (-26°C to +65°C)
- Application: General Type C air supply lines, paint spray booths, and inplant air services

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
BA10-038	3/8	0.69	12.5	250	0.14	300' - Reel

**NOTE!**



When coupled with quick disconnect fittings the use of a locking sleeve is required to minimize the risk of accidental disconnection. NIOSH only certifies complete breathing respirator systems, not hose assemblies.

**WARNING!**



Working pressures are calculated at 70 F° degrees. Maximum working pressure decreases as temperature increases. Never exceed the maximum working pressure of the lowest rated component in the assembly.





## PL10 Push Lock 300 PSI

- Tube:** Black Nitrile, ARPM Class A (high oil resistance)
- Reinforcement:** Synthetic fiber
- Cover:** MSHA synthetic rubber, ARPM Class B (medium oil resistant)
- Temperature:** -40°F to +190°F (-40°C to +88°C)
- Application:** For use with push-on fittings at maximum working pressures of 300 psi. For low-pressure hydraulic and pneumatic systems such as shop air systems, and maintenance and automotive applications. Non-conductive, minimum electrical resistance, greater than (1) megohm per inch of length of hose at 1000 Volts DC.

1

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
L10-04BK*	1/4	0.54	13.7	300	0.09	500' - Reel
PL10-05BK*	5/16	0.62	15.7	300	0.12	500' - Reel
PL10-06BK*	3/8	0.69	17.5	300	0.14	500' - Reel
PL10-08BK*	1/2	0.81	20.5	300	0.17	500' - Reel
PL10-10BK*	5/8	0.93	23.6	300	0.20	500' - Reel
PL10-12BK*	3/4	1.07	27.2	300	0.25	500' - Reel
PL10-16BK*	1	1.34	34.0	300	0.34	50' - Coil

*Stock: Black - BK, Blue - BL, Red - RD*  
*MOQ/Full Reels: Gray - GY, Green - GN*



## AH55 Recoil Hose Assemblies

- Tube/Cover:** Ether based polyurethane
- Temperature:** -40°C to +79°C (-40°F to +175°F)
- Application:** Polyurethane Recoil Hose retains its self-coiling properties and stores itself when finished. Can be used with all air-powered equipment on the job site and in garages, plants, service stations, car wash soap applications, as well as pneumatic airlines on machinery. It features swivel fittings to reduce twist. Bend restrictors reduce kinking and increase the life of the hose. The soft polyurethane finish is less likely to scratch surfaces.

Part #	ID	Assembly Length	OD		Max WP	Fitting	Weight
	in	ft	in	mm	psi		lbs/ft
AH55-025-15	1/4	15	0.38	9.6	125	1/4" M-NPT	0.65
AH55-025-25	1/4	25	0.38	9.6	125	1/4" M-NPT	0.85
AH55-025-50	1/4	50	0.38	9.6	125	1/4" M-NPT	2.00
AH55-038-15	3/8	15	0.57	14.4	125	3/8" M-NPT	1.40
AH55-038-25	3/8	25	0.57	14.4	125	3/8" M-NPT	2.20
AH55-038-50	3/8	50	0.57	14.4	125	3/8" M-NPT	4.00

**WARNING!** Working pressures are calculated at 70 F° degrees. Maximum working pressure decreases as temperature increases.  
 Never exceed the maximum working pressure of the lowest rated component in the assembly.



1



## AH60 Steel Air Hose 600

- Tube:** Synthetic oil mist resistant
- Reinforcement:** Steel wire braid
- Cover:** Yellow cut and abrasion resistant rubber with red stripe
- Temperature:** -22°F to +268°F (-30°C to +131°C)
- Application:** High pressure air service for mining, construction and industrial use. More resistant to external abuse than textile air hose.
- Vacuum:** Not recommended
- Branding:** FORSAFLEX AH60-200 2" STEEL AIR HOSE 600 PSI MAX WP.

### TEMPERATURE/PRESSURE DE-RATING SCHEDULE

Temperature		Max WP (psi)
21°C	70°F	600
32°C	90°F	546
66°C	150°F	384
93°C	200°F	252

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
AH60-200	2	2.60	66.0	600	1.69	25'/50' - Coils
AH60-300	3	3.70	94.0	600	3.02	25'/50' - Coils
AH60-400	4	4.80	122.0	600	4.54	25'/50' - Coils
AH60-600	6	7.12	180.8	600	8.03	25'/50' - Coils

**WARNING!** Working pressures are calculated at 70 F° degrees. Maximum working pressure decreases as temperature increases.  
 Never exceed the maximum working pressure of the lowest rated component in the assembly.



## AH61 Steel Air Hose - High Temp (R&D)

- Tube:** Black CPE synthetic rubber, ARPM Class B (medium oil resistance)
- Reinforcement:** Steel wire braid
- Cover:** Black abrasion weather, and oil resistant carboxylated nitrile
- Temperature:** -40°F to +302°F (-40°C to +150°C)
- Application:** Heavy-duty air hose for mines, quarries and construction. Designed to maintain full working pressure at 150°C.

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
AH61-200	2	2.57	65.3	600	1.54	25'/50' - Coils
AH61-300	3	3.56	90.5	600	2.84	25'/50' - Coils

\* No cut lengths



Part #	SIZE
	in
HW200-200MP	2
HW300-300MP	3



Part #	SIZE
	in
HW200-200FGJ	2
HW300-300FGJ	3





## AH65 Extra Service 400 Air

- Tube:** Synthetic oil mist resistant.
- Reinforcement:** Synthetic fiber
- Cover:** Yellow cut and abrasion resistant rubber with blue stripe
- Temperature:** -31°F to +180°F (-35°C to +82°C)
- Application:** A superior quality hose for mining, construction and industrial use.
- Vacuum:** Not recommended
- Branding:** FORSAFLEX AH65-200 2" EXTRA SERVICE HOSE 400 PSI MAX WP.

1

### TEMPERATURE/PRESSURE DE-RATING SCHEDULE

Temperature		Max WP (psi)
21°C	70°F	600
32°C	90°F	546
66°C	150°F	384
93°C	200°F	252

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
AH65-050	1/2	0.95	24.1	400	0.31	50/100' - Coil
AH65-075	3/4	1.26	32.0	400	0.41	50/100' - Coil
AH65-100	1	1.54	39.1	400	0.61	50/100' - Coil
AH65-125	1-1/4	1.89	48.0	400	0.81	50/100' - Coil
AH65-150	1-1/2	2.12	53.8	400	0.91	50/100' - Coil
AH65-200	2	2.63	66.8	400	1.20	50/100' - Coil
AH65-250	2-1/2	3.18	80.7	400	1.80	50/100' - Coil
AH65-300	3	3.70	76.2	400	1.92	50/100' - Coil
AH65-400	4	4.80	121.9	400	2.49	50/100' - Coil

## AH65 Extra Service 400 Air Assemblies



Ground Joints

Part #	Hose Size	Fitting A	Fitting B	Length ft.	Attaching Method
AH65-050MHMH050	1/2	Mining	Mining	50	Band Clamps
AH65-100MHMH050	1	Mining	Mining	50	Band Clamps
AH65-075UU050	3/4	Universal	Universal	50	Crimp
AH65-200FF050	2	Female G-J	Female G-J	50	Crimp

\* Other lengths and fitting combinations are available.

**WARNING!**



Working pressures are calculated at 70 F° degrees. Maximum working pressure decreases as temperature increases.

Never exceed the maximum working pressure of the lowest rated component in the assembly.

## AH67 Contractors Air 300



- Tube:** Synthetic oil mist resistant
- Reinforcement:** Synthetic fiber
- Cover:** Yellow, cut and abrasion resistant rubber with green stripe
- Temperature:** -31°F to +180°F (-35°C to +82°C)
- Application:** A superior quality hose for mining, construction and industrial use.
- Vacuum:** Not recommended
- Branding:** FORSAFLEX AH67-200 2" CONTRACTORS AIR HOSE 300 PSI MAX WP

1

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
AH67-200	2	2.60	66.0	300	1.16	25'/50'/100' - Coils

## AH67 Contractors Air 300 Assemblies



Part #	Hose Size	Fitting A	Fitting B	Length ft.	Attaching Method
AH67-200FF050	2	Female G-J	Female G-J	50	Crimp

\* Other lengths and fitting combinations are available.





## AT10 EPDM Heater Hose - Standard

- Tube:** Black EPDM
- Reinforcement:** Synthetic fiber
- Cover:** Black heat and weather resistant EPDM
- Temperature:** -40°F to +257°F (-40°C to +125°C)
- Application:** For use in general industrial & automotive service. Meets SAE J20R3 D2

2

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
AT10-038	3/8	0.69	17.5	60	2.5	0.16	50' - Coil
AT10-050	1/2	0.77	19.6	60	3.0	0.17	50' - Coil
AT10-063	5/8	0.91	23.1	60	3.8	0.20	50' - Coil
AT10-075	3/4	1.05	26.7	50	4.5	0.24	50' - Coil
AT10-100	1	1.34	34.0	40	7.0	0.37	50' - Coil



## AT16 Silicone Heater Hose

- Tube:** Red silicone
- Reinforcement:** Synthetic fiber
- Cover:** Blue heat and weather resistant silicone
- Temperature:** -65°F to +350°F (-54°C to +177°C)
- Application:** For low pressure water and heater application. Meets SAE 20R3 Class A specifications.

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
AT16-025	1/4	0.53	13.5	85	0.12	400 - Reel
AT16-031	5/16	0.59	15.0	85	0.14	600 - Reel
AT16-038	3/8	0.69	17.5	80	0.18	500 - Reel
AT16-050	1/2	0.81	20.6	80	0.24	500 - Reel
AT16-063	5/8	0.94	23.9	70	0.29	300 - Reel
AT16-075	3/4	1.06	26.9	70	0.32	300 - Reel
AT16-087	7/8	1.19	30.2	60	0.36	200 - Reel
AT16-100	1	1.34	34.0	50	0.46	200 - Reel





## AT29 Silicone Coolant Hose

- Tube:** Red silicone
- Reinforcement:** Three plies of synthetic fiber
- Cover:** Blue heat and weather resistant silicone
- Temperature:** -65°F to +350°F (-54°C to +177°C)
- Application:** For heavy duty heater and coolant applications. Meets SAE J20 R1 Class A

2

Part #	ID	OD		Min BP	Standard Pack
	in	in	mm	in	
AT29-038-3	3/8	0.71	18.0	425	3'
AT29-050-3	1/2	0.83	21.1	425	3'
AT29-063-3	5/8	0.95	24.1	425	3'
AT29-075-3	3/4	1.07	27.2	325	3'
AT29-088-3	7/8	1.20	30.5	300	3'
AT29-100-3	1	1.32	33.5	300	3'
AT29-113-3	1-1/8	1.45	36.8	300	3'
AT29-125-3	1-1/4	1.57	39.9	275	3'
AT29-138-3	1-3/8	1.70	43.2	250	3'
AT29-150-3	1-1/2	1.82	46.3	250	3'
AT29-163-3	1-5/8	1.95	49.5	225	3'
AT29-175-3	1-3/4	2.07	52.6	225	3'
AT29-188-3	1-7/8	2.21	56.1	200	3'
AT29-200-3	2	2.32	58.9	200	3'
AT29-213-3	2-1/8	2.45	62.2	175	3'
AT29-225-3	2-1/4	2.57	65.3	175	3'
AT29-238-3	2-3/8	2.70	68.6	150	3'
AT29-250-3	2-1/2	2.82	71.6	150	3'
AT29-263-3	2-5/8	2.95	75.0	125	3'
AT29-275-3	2-3/4	3.07	78.0	125	3'
AT29-288-3	2-7/8	3.21	81.5	100	3'
AT29-300-3	3	3.32	84.3	100	3'
AT29-325-3	3-1/4	3.57	90.7	75	3'
AT29-350-3	3-1/2	3.82	97.0	75	3'
AT29-375-3	3-3/4	4.07	103.4	50	3'
AT29-400-3	4	4.32	109.7	50	3'
AT29-450-3	4-1/2	4.82	122.4	N/A	3'
AT29-500-3	5	5.32	135.1	N/A	3'





## AB10 Air Brake Hose

- Tube:** Black synthetic rubber
- Reinforcement:** Synthetic fiber
- Cover:** Black resistant rubber
- Temperature:** -40°F to +212°F (-40°C to +100°C)
- Application:** This hose is designed for compressed air brake systems on trucks and buses. Meets DOT FMVSS-106, SAE J1402.

2

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
AB10-06	3/8	0.75	19.0	225	2.5	0.17	250'- Reel
AB10-08	1/2	0.88	22.4	225	3.5	0.21	250'- Reel



## AT50 Fuel Line Hose

- Tube:** Black nitrile
- Reinforcement:** Synthetic fiber
- Cover:** Black oil & heat resistant synthetic rubber
- Temperature:** -40°F to +257°F (-40°C to +125°C)
- Application:** Fuel and vapor emission lines. Meets SAE 30R7.

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
AT50-019	3/16	0.41	10.4	75	2.0	0.07	250' Reel
AT50-025	1/4	0.50	12.7	50	2.5	0.10	250' Reel
AT50-025-025	1/4	0.50	12.7	50	2.5	0.10	25' Reel
AT50-031	5/16	0.56	14.2	50	3.0	0.11	250' Reel
AT50-031-25	5/16	0.56	14.2	50	3.0	0.11	25' Reel
AT50-038	3/8	0.63	16.0	50	3.5	0.14	250' Reel
AT50-038-25	3/8	0.63	16.0	50	3.5	0.14	25' Reel





\*Non-Stock

## 1485 Air Brake Tubing - D.O.T.

**Tube:** Heat and light stabilized seamless extruded black nylon.

 **NOTE:** 1/8" Does NOT comply with F.M.V.S-5/06.

**Temperature:** -40°F to +200°F (-40°C to +93°C)

**Application:** Truck, bus and mobile air brake, and service lines where heat and battery acids are not present. Conforms to SAE J844 specification. Meets D.O.T. FMVSS 106-74.

2

Part #	Tubing Color	OD		Wall Thickness	Max WP
		in	mm	in	psi
<b>Type 3A Non-Reinforced</b>					
1485-2	Black	1/8	3.2	0.023	250
1485-3	Black	3/16	4.8	0.035	250
1485-4	Black	1/4	6.4	0.040	300
1485-5	Black	5/16	7.9	0.040	250
<b>Type 3B Reinforced</b>					
1485-6	Black	3/8	9.5	0.062	350
1485-8	Black	1/2	12.7	0.062	240
1485-10	Black	5/8	15.9	0.092	225
1485-12	Black	3/4	19.1	0.092	200

\*Other colors are available

**WARNING!**  Working pressures are calculated at 70 F° degrees. Maximum working pressure decreases as temperature increases.  
Never exceed the maximum working pressure of the lowest rated component in the assembly.





## MXH Marine Exhaust Hardwall

**Tube:** Black heat resistant SBR

**Reinforcement:** Wire helix between layers of textile cords.

**Cover:** Black heat resistant synthetic SBR with blue identification stripe.

**Temperature:** -40°F to +212°F (-40°C to +100°C)

**Application:** For wet exhaust service on marine engines and is also designed to handle water intake and general applications. Meets SAE J2006 Type R2.

\*Non-Stock

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
MXH-075	3/4	1.16	29.5	75	0.42	50'
MXH-088	7/8	1.31	33.3	75	0.50	50'
MXH-100	1	1.41	35.8	75	0.53	50'
MXH-113	1-1/8	1.56	39.6	75	0.62	50'
MXH-125	1-1/4	1.66	42.2	75	0.64	50'
MXH-131	1-5/16	1.72	43.7	75	0.66	50'
MXH-138	1-3/8	1.81	46.0	75	0.74	50'
MXH-150	1-1/2	1.91	48.5	50	0.78	50'
MXH-163	1-5/8	2.04	51.8	50	0.87	50'
MXH-175	1-3/4	2.18	55.4	50	0.96	50'
MXH-188	1-7/8	2.35	59.7	50	1.14	50'
MXH-200	2	2.48	63.0	50	1.18	50'
MXH-213	2-1/8	2.56	65.0	50	1.22	50'
MXH-225	2-1/4	2.69	68.3	50	1.33	50'
MXH-238	2-3/8	2.83	71.9	50	1.40	50'
MXH-250	2-1/2	2.93	74.4	50	1.41	50'
MXH-263	2-5/8	3.07	78.0	50	1.52	50'
MXH-288	2-7/8	3.33	84.6	40	1.67	50'
MXH-300	3	3.46	87.9	40	1.74	50'
MXH-313	3-1/8	3.61	91.7	40	1.90	50'
MXH-350	3-1/2	3.98	101.1	40	2.13	50'
MXH-400	4	4.50	114.3	40	2.50	50'
MXH-450	4-1/2	5.04	128.0	40	3.00	25'
MXH-500	5	5.50	139.7	40	3.19	25'

Do not use in applications requiring low-permeation fuel feed hose (SAE J1527 A1-15)



2



## MXS Marine Exhaust Softwall

- Tube:** Black heat resistant synthetic rubber
- Reinforcement:** Synthetic fiber
- Cover:** Black heat and weather resistant synthetic rubber with blue identification stripe.
- Temperature:** -40°F to +200°F (-40°C to +93°C)
- Application:** Marine exhaust applications. Meets SAEJ 2006 R1.

\*Non-Stock

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
MXS-100	1	1.44	36.6	200	0.45	50' - Coil
MXS-113	1-1/8	1.56	39.6	200	0.51	50' - Coil
MXS-125	1-1/4	1.79	45.5	200	0.71	50' - Coil
MXS-131	1-5/16	1.85	47.0	200	0.73	50' - Coil
MXS-138	1-3/8	1.91	48.5	200	0.77	50' - Coil
MXS-150	1-1/2	2.04	51.8	200	0.81	50' - Coil
MXS-163	1-5/8	2.19	55.6	200	0.90	50' - Coil
MXS-175	1-3/4	2.28	57.9	200	0.91	50' - Coil
MXS-188	1-7/8	2.41	61.2	200	0.96	50' - Coil
MXS-200	2	2.57	65.3	200	1.11	50' - Coil
MXS-213	2-1/8	2.69	68.3	200	1.18	25' - Coil
MXS-225	2-1/4	2.82	71.6	200	1.24	25' - Coil
MXS-238	2-3/8	2.96	75.2	200	1.33	25' - Coil
MXS-250	2-1/2	3.07	78.0	200	1.35	25' - Coil
MXS-263	2-5/8	3.20	81.3	200	1.43	25' - Coil
MXS-288	2-7/8	3.43	87.1	200	1.46	25' - Coil
MXS-300	3	3.66	93.0	200	1.83	25' - Coil
MXS-350	3-1/2	4.15	105.4	200	2.08	25' - Coil
MXS-413	4-1/8	4.13	104.9	200	2.41	25' - Coil
MXS-400	4	4.63	117.6	200	2.32	25' - Coil
MXS-450	4-1/2	5.15	139.7	200	2.55	25' - Coil
MXS-500	5	5.85	148.6	200	3.69	25' - Coil





## MFH Marine Fuel Fill - Hardwall

**Tube:** Black oil and fuel resistant nitrile rubber.

**Reinforcement:** A high tensile steel helix wire embedded between textile cords.

**Cover:** Black oil and weather resistant nitrile rubber.

**Temperature:** -40°F to +180°F (-40°C to +80°C)

**Application:** For use in all marine fuel fill applications. Meets SAE J1527 Type A2.

2

\*Non-Stock

Part #	Cover	ID	OD		Max WP psi	Min BR in	Weight lbs/ft	Standard Pack
		in	in	mm				
MFH-150	1-1/2	1.85	47.0	28	150	3.00	0.29	100'
MFH-163	1-5/8	2.01	51.1	28	150	3.50	0.37	100'
MFH-175	1-3/4	2.13	54.1	28	150	4.00	0.42	100'
MFH-188	1-7/8	2.28	57.9	28	150	6.00	0.50	100'
MFH-200	2	2.40	61.0	28	150	8.00	0.53	100'
MFH-213	2-1/8	2.52	64.0	28	150	8.50	0.62	100'
MFH-225	2-1/4	2.64	67.1	28	150	9.00	0.64	100'
MFH-238	2-3/8	2.76	70.1	28	150	10.00	3.19	100'





## CH12 UHMW Chemical Hose DEF

- Tube:** Clear smooth (UHMW) Ultra High Molecular Weight
- Reinforcement:** High tensile textile cord and steel wire helix
- Cover:** Flat corrugated green EPDM
- Temperature:** -22°F to +212°F (-30°C to +100°C) Steam cleaning in open circuit up to 120°C (250°F) during 30 minutes
- Application:** CH12 will handle 94% of common chemical, petroleum, and DEF products in both suction and discharge applications. Corrugated cover makes for greater flexibility.
- Branding:** CH12-200 2" UHMW CHEMICAL HOSE 240 PSI MAX WP

\* Steam cleaning without pressure up to 120°C / 248°F max 30 min.

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
CH12-075	3/4	1.19	30.2	240	27	3.7	0.40	100' - Coil
CH12-100	1	1.47	37.4	240	27	5.0	0.54	100' & 200' - Coil
CH12-125	1-1/4	1.81	46.0	240	27	6.3	0.91	100' & 200' - Coil
CH12-150	1-1/2	2.01	51.1	240	27	7.5	1.09	100' & 200' - Coil
CH12-200	2	2.63	66.8	240	27	10.0	1.56	100' & 200' - Coil
CH12-250	2-1/2	3.03	77.0	240	27	12.4	1.78	100' - Coil
CH12-300	3	3.63	92.2	240	27	15.0	2.33	100' - Coil
CH12-400	4	4.63	117.6	240	27	20.0	3.05	100' - Coil
CH12-600	6	6.89	175.0	240	27	30.0	6.90	100' - Coil

## CH12 UHMW Chemical Assemblies - 316 Stainless Camlocks



C x E

Part #	Hose Size	316 Stainless (A)	316 Stainless (B)	Length ft	Attaching Method
CH12-100CE020-RL-S6	1	C - locking	E	20	Crimp
CH12-150CE020-RL-S6	1-1/2	C - locking	E	20	Crimp
CH12-200CE020-RL-S6	2	C - locking	E	20	Crimp
CH12-300CE020-RL-S6	3	C - locking	E	20	Crimp
CH12-400CE020-RL-S6	4	C - locking	E	20	Crimp
CH12-100CE020-S6	1	C	E	20	Crimp
CH12-150CE020-S6	1-1/2	C	E	20	Crimp
CH12-200CE020-S6	2	C	E	20	Crimp
CH12-300CE020-S6	3	C	E	20	Crimp
CH12-400CE020-S6	4	C	E	20	Crimp

\* Other lengths and fitting combinations are available.

**WARNING!**



The temperature of the medium must be lower than its boiling point.

- Consult the Chemical Resistance Guide for compatibility.
- The Reproduction, Distribution, and Utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (Per ISO 16016)





## CH22 PTFE - Chemical

- Tube:** Smooth FEP (PTFE material)
- Reinforcement:** A high tensile steel helix embedded between layers of textile cords
- Cover:** Blue Synthetic weather and abrasion resistant rubber
- Temperature:** -40°F to +300°F (-40°C to +148°C)
- Application:** Used in chemical, pharmaceutical, food & beverage transfer, pulp & paper industries.

3

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
CH22-100	1	1.00	25.4	400	6.0	0.64	Random
CH22-150	1-1/2	2.00	50.8	350	10.0	1.01	Random
CH22-200	2	2.50	63.5	300	12.0	1.40	Random

### WARNING!



Consult the [Chemical Resistance Guide](#) for compatibility.



## CH30 Weed Spray

- Tube:** Yellow PVC
- Reinforcement:** High tensile strength yard, braided
- Cover:** Yellow ribbed PVC
- Temperature:** 23°F to +150°F (-5°C to +65°C)
- Application:** PVC spray hose used for agricultural spraying, pest spraying, nursery spraying and wash-down applications. Ribbed PVC cover minimizes drag resistance. Long standard one piece lengths are available for use on reels.

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
CH12-075	3/4	1.19	30.2	240	0.40	100' - Coil
CH12-100	1	1.47	37.4	240	0.54	100' & 200' - Coil
CH12-125	1-1/4	1.81	46.0	240	0.91	100' & 200' - Coil
CH12-150	1-1/2	2.01	51.1	240	1.09	100' & 200' - Coil
CH12-200	2	2.63	66.8	240	1.56	100' & 200' - Coil
CH12-250	2-1/2	3.03	77.0	240	1.78	100' - Coil
CH12-300	3	3.63	92.2	240	2.33	100' - Coil
CH12-400	4	4.63	117.6	240	3.05	100' - Coil



## TBR Smooth Bore Teflon/Stainless Steel Wire



- Tube:** Smooth FDA Compliant PTFE (.030 wall)  
**Cover:** One braid of 304 stainless steel wire braid  
**Temperature:** -76°F to +450°F (-60°C to +232°C) continuous  
**Application:** Automotive, plastic injection molding, food & beverage, bus/truck, paints and solvents, hydraulics

3

Part #	ID	OD		Max WP	Min BR	Weight	One-Piece Couplings
	in	in	mm	psi	in	lbs/ft	
TBR-03	3/16	0.30	7.6	2,750	2.0	0.07	T
TBR-04	1/4	0.35	8.8	2,610	3.0	0.10	T
TBR-05	5/16	0.43	11.0	2,540	4.0	0.11	T
TBR-06	3/8	0.48	12.1	2,250	5.0	0.12	T
TBR-08	1/2	0.64	16.2	1,500	6.6	0.15	T
TBR-10	5/8	0.74	18.8	1,250	8.0	0.17	T
TBR-12	3/4	0.91	23.1	1,010	9.2	0.20	T
TBR-16	1	1.15	29.2	870	12.0	0.30	T

## TBX Convoluted Smooth Bore Teflon Stainless



- Tube:** Smooth black static conductive PTFE  
**Cover:** One braid of 304 stainless steel wire braid  
**Temperature:** -76°F to +450°F (-60°C to +232°C) continuous  
**Application:** Automotive, plastic injection molding, food & beverage, bus/truck, paints and solvents, hydraulics

Part #	ID	OD		Max WP	Min BR	Weight	One-Piece Couplings
	in	in	mm	psi	in	lbs/ft	
TBX-06C	3/8	0.53	13.5	1,160	1.0	0.10	T
TBX-08C	1/2	0.69	17.5	870	1.5	0.15	T
TBX-12C	3/4	0.95	24.2	870	2.5	0.26	T
TBX-16C	1	1.25	31.7	725	3.0	0.36	T

**WARNING!**



Consult the [Chemical Resistance Guide](#) for compatibility.



## CP25 Composite - Chemical Hose (PG)

- Tube:** White polypropylene film
- Cover:** Green PVC coated polyester
- Inner Wire:** Polypropylene coated steel
- Outer Wire:** Galvanized steel
- Temperature:** -40°F to +212°F (-40°C to +100°C)
- Application:** In-plant, tank truck, rail car, liquid chemical suction and discharge.  
EN135765, USCG
- Branding:** CP25-300 3" CHEMICAL HOSE 250 PSI MAX WP

Part #	ID	Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	psi	in/Hg	in	lbs/ft	
CP25-100	1	250	26	4.0	0.52	131' - Coil
CP25-150	1-1/2	250	26	5.5	0.90	131' - Coil
CP25-200	2	250	26	7.1	1.37	131' - Coil
CP25-300	3	250	26	11.0	2.11	131' - Coil
CP25-400	4	250	26	16.0	3.20	131' - Coil



## CP45 Composite - PTFE Hose (SS)

- Tube:** White Nanotech PTFE
- Cover:** Red PVC coated polyester
- Inner Wire:** 316 stainless
- Outer Wire:** 316 stainless
- Temperature:** -40°F to +212°F (-40°C to +100°C)
- Application:** Nanotechnology is flexible, superbly durable and highly puncture resistant to tears and cuts. Nanotec is 100% (DuPont) Teflon with zero permeability. It is superior to standard "skived" Teflon films that are typically found in most competing chemical composite hoses. EN135765, USCG
- Branding:** FORSAFLEX CP45-300 3" PTFE - NANO HOSE 200 PSI MAX WP

Part #	ID	Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	psi	in/Hg	in	lbs/ft	
CP45-100	1	200	26	4.0	0.52	131' - Coil
CP45-150	1-1/2	200	26	4.0	0.75	131' - Coil
CP45-200	2	200	26	6.0	1.05	131' - Coil
CP45-300	3	200	26	10.0	1.50	131' - Coil
CP45-400	4	200	26	12.0	2.43	131' - Coil

**WARNING!**



The temperature of the medium must be lower than its boiling point.





## CP30 Composite - Petroleum Hose (GG)

**Tube:** White polypropylene  
**Cover:** Black PVC coated polyester  
**Inner Wire:** Galvanized steel  
**Outer Wire:** Galvanized steel  
**Temperature:** -40°F to +212°F (-40°C to +100°C)

**Application:** In-plant, tank truck, rail car, for both suction and discharge. EN135765, USCG  
**Branding:** FORSAFLEX CP30-300 3" PETROLEUM HOSE 200 PSI MAX WP

Part #	ID	Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	psi	in/Hg	in	lbs/ft	
CP30-200	2	200	26	6.0	1.15	131' - Coil
CP30-300	3	200	26	10.0	1.70	131' - Coil
CP30-400	4	200	26	12.0	2.75	131' - Coil
CP30-600	6	200	26	23.0	6.60	131' - Coil
CP30-800	8	200	26	32.0	8.93	131' - Coil
CP30-1000	10	200	26	40.0	15.20	82' - Coil



## CP35 Composite - Fuel/Vapor Hose (AG)

**Tube:** White polypropylene film  
**Cover:** Yellow PVC Coated Polyester  
**Inner Wire:** Aluminum  
**Outer Wire:** Galvanized  
**Temperature:** -40°F to +185°F (-40°C - +85°C)

**Application:** To reduce hydro carbon emissions at fueling stations and fuel drop.  
**Branding:** FORSAFLEX CP35-300 3" FUEL - VAPOUR HOSE 150 PSI MAX WP

Part #	ID	Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	psi	in/Hg	in	lbs/ft	
CP35-200	2	150	20	6.0	0.90	131' - Coil
CP35-300	3	150	20	10.0	1.35	131' - Coil
CP35-400	4	150	20	12.0	2.12	131' - Coil

**WARNING!**



The temperature of the medium must be lower than its boiling point.



## CP60 Composite - Oil & Water Hose (GG)

- Tube:** White polypropylene
- Cover:** Blue PVC coated polyester
- Inner Wire:** Galvanized steel
- Outer Wire:** Galvanized steel
- Temperature:** -40°F to +176°F (-40°C to +80°C)
- Application:** CP60 is a very flexible hose preferred by many users for construction, dewatering, municipal, irrigation and mining applications.
- Branding:** FORSAFLEX CP60-600 6" OIL & WATER HOSE 200 PSI MAX WP

Part #	ID	Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	psi	in/Hg	in	lbs/ft	
CP60-400	4	250	26	16.0	3.50	65'
CP60-600	6	250	26	23.0	7.70	65'
CP60-800	8	250	26	32.0	12.00	65'
CP60-1000	10	250	26	40.0	16.90	40'
CP60-1200	12	250	26	47.0	19.80	40'
CP60 - 1400	14	200	26	55.12	21.00	20'
CP60 - 1600	16	200	26	62.99	24.50	20'

### CP60 Composite Assemblies - Fixed x Floating



Fixed x Floating

Part #	Hose Size	Length	Fitting A	Fitting B	Weight/Assy
		ft			lbs
CP60-400FFL-010	4	10	Fixed 150lb	Floating 150lb	70.6
CP60-400FFL-020	4	20	Fixed 150lb	Floating 150lb	99.2
CP60-600FFL-010	6	10	Fixed 150lb	Floating 150lb	160.9
CP60-600FFL-020	6	20	Fixed 150lb	Floating 150lb	233.7
CP60-800FFL-010	8	10	Fixed 150lb	Floating 150lb	264.6
CP60-800FFL-020	8	20	Fixed 150lb	Floating 150lb	381.4
CP60-1000FFL-010	10	10	Fixed 150lb	Floating 150lb	363.8
CP60-1000FFL-020	10	20	Fixed 150lb	Floating 150lb	507.1
CP60-1200FFL-010	12	10	Fixed 150lb	Floating 150lb	551.3
CP60-1200FFL-020	12	20	Fixed 150lb	Floating 150lb	760.0



Vic x Vic

### CP60 Composite Assemblies - Vic x Vic

Part #	Hose Size	Length	Fitting A	Fitting B	Weight/Assy
		ft			lbs
CP60-800GG-010	8	10	Vic	Vic	178.57
CP60-800GG-020	8	20	Vic	Vic	284.40
CP60-1000GG-010	10	10	Vic	Vic	291.01
CP60-1000GG-020	10	20	Vic	Vic	423.29
CP60-1200GG-010	12	10	Vic	Vic	341.72
CP60-1200GG-020	12	20	Vic	Vic	465.18

\* Assembled with fixed x floating carbon steel 150lbs ANSI flanges



## CP Composite - Fittings

### Composite Ferrules



PLATED STEEL		304 STAINLESS	
Size	Part #	Size	Part #
2"	CPF-200	1"	CPF-100-S4
2-1/2"	CPF-250	1-1/2"	CPF-150-S4
3"	CPF-300	2"	CPF-200-S4
4"	CPF-400	2-1/2"	CPF-250-S4
6"	CPF-600	3"	CPF-300-S4
8"	CPF-800	4"	CPF-400-S4
10"	CPF-1000		
12"	CPF-1200		



NBR GASKETS		VITON GASKETS	
Size	Part #	Size	Part #
2"	CPS-200-NR	1"	CPS-100-VI
2-1/2"	CPS-250-NR	1-1/2"	CPS-150-VI
3"	CPS-300-NR	2"	CPS-200-VI
4"	CPS-400-NR	3"	CPS-300-VI
6"	CPS-600-NR	4"	CPS-400-VI
8"	CPS-800-NR		
10"	CPS-1000-NR		
12"	CPS-1200-NR		

### Composite Male NPT Inserts



PLATED STEEL	
Size	Part #
2"	CPT-200
2-1/2"	CPT-250
3"	CPT-300
4"	CPT-400
6"	CPT-600
8"	CPT-800

316 STAINLESS	
Size	Part #
1"	CPT-100-S6
1-1/2"	CPT-150-S6
2"	CPT-200-S6
3"	CPT-300-S6
4"	CPT-400-S6

UHMW	
Size	Part #
1"	CPT-100-UH
1-1/2"	CPT-150-UH
2"	CPT-200-UH
3"	CPT-300-UH



### Composite Grooved Inserts



PLATED STEEL	
Size	Part #
1"	CPG-100
2"	CPG-200
3"	CPG-300
4"	CPG-400
6"	CPG-600
8"	CPG-800
10"	CPG-1000
12"	CPG-1200

316 STAINLESS	
Size	Part #
2"	CPG-200-S6
3"	CPG-300-S6
4"	CPG-400-S6

## Composite Fixed Flanges



PLATED STEEL 150lbs FIXED FLANGE	
Size	Part #
4"	CPFF-400
6"	CPFF-600
8"	CPFF-800
10"	CPFF-1000
12"	CPFF-1200
12"	CPF-1200

316 STAINLESS 150lbs FIXED FLANGE	
Size	Part #
2"	CPFF-200-S6
3"	CPFF-300-S6
4"	CPFF-400-S6

## Composite Turn Back And Floating Flanges



PLATED STEEL 150lbs TURN BACK	
Size	Part #
4"	CPTB-400
6"	CPTB-600
8"	CPTB-800
10"	CPTB-1000
12"	CPTB-1200

316 STAINLESS 150lbs TURN BACK	
Size	Part #
2"	CPTB-200-S6
3"	CPTB-300-S6
4"	CPTB-400-S6

## TTMA



PLATED STEEL 150lbs FIXED	
Size	Part #
3"	CPTTMA-300
4"	CPTTMA-400

316 STAINLESS 150lbs FIXED	
Size	Part #
3"	CPTB-300-S6
4"	CPTB-400-S6

## Composite Camlocks Type C (Ring Lok)



ALUMINUM RING LOK	
Size	Part #
2"	CPAL-C200-RL
3"	CPAL-C300-RL
4"	CPAL-C400-RL

316 STAINLESS STEEL - RING LOK	
Size	Part #
2"	CPSS-C200-RL
3"	CPSS-C300-RL
4"	CPSS-C400-RL

## Composite Camlocks Type E



ALUMINUM	
Size	Part #
2"	CPAL-E200
3"	CPAL-E300
4"	CPAL-E400

316 STAINLESS STEEL	
Size	Part #
2"	CPSS-E200
3"	CPSS-E300
4"	CPSS-E400



5



## DF11 Diesel Exhaust Fluid (DEF)

- Tube:** Specially formulated EPDM
- Reinforcement:** Synthetic fiber
- Cover:** Specially formulated EPDM
- Temperature:** -4°F to +140°F (-40°C to +60°C)
- Application:** DF11 Dispensing Hose is specifically designed to convey the high-purity, aqueous urea solution (DEF). Not for submersion applications.
- Branding:** FORSAFLEX DF11-075 3/4" DEF HOSE 210 PSI MAX ISO-22241

Part #	ID	OD	Max WP		Max BP		Weight	Min BR
	in	mm	Bar	psi	Bar	psi	kg	mm
DF11-075	3/4	28.0	14.5	210	43.5	630	0.37	190
DF11-100	1	34.0	14.5	210	43.5	630	0.53	250



## CH12 UHMW Chemical Hose DEF

- Tube:** Clear smooth (UHMW) Ultra High Molecular Weight
- Reinforcement:** High tensile textile cord and steel wire helix
- Cover:** Flat corrugated green EPDM
- Temperature:** -22°F to +212°F (-30°C to +100°C) Steam cleaning in open circuit up to 120°C (250°F) during 30 minutes
- Application:** CH12 will handle 94% of common chemical, petroleum, and DEF products in both suction and discharge applications. Corrugated cover makes for greater flexibility.
- Branding:** CH12-200 2" UHMW CHEMICAL HOSE 240 PSI MAX WP

\* Steam cleaning without pressure up to 120°C / 248°F max 30 min.

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
CH12-100	1	1.47	37.4	240	27	5.0	0.54	100' & 200' - Coil
CH12-125	1-1/4	1.81	46.0	240	27	6.3	0.91	100' & 200' - Coil
CH12-150	1-1/2	2.01	51.1	240	27	7.5	1.09	100' & 200' - Coil
CH12-200	2	2.63	66.8	240	27	10.0	1.56	100' & 200' - Coil





## DEF 316 Stainless Steel Fittings



MALE NPT SOLID STAINLESS	
Hose & Thread Size	Part #
1/2" x 1/2"	W08-08MP-SS
3/4" x 3/4"	W12-12MP-SS
1" x 1"	W16-16MP-SS
1 1/4" x 1 1/4"	DF20-20MP-SS
1 1/2" x 1 1/2"	DF24-24MP-SS
2" x 2"	DF32-32MP-SS



MALE NPT SWIVEL STAINLESS	
Hose & Thread Size	Part #
1/2" x 1/2"	W08-08MPX-SS
3/4" x 3/4"	W012-12MPX-SS
1" x 1"	W16-16MPX-SS

5



MALE BSPP SWIVEL STAINLESS	
Hose & Thread Size	Part #
3/4" x 3/4"	W12-12MBSPPX-SS
1" x 1"	W16-16MBSPPX-SS



FEMALE BSPP FLAT FACE SWIVEL STAINLESS	
Hose & Thread Size	Part #
3/4" x 3/4"	W12-12FBSPX-SS
1" x 1"	W16-16FBSPX-SS



DEF STAINLESS MALE CAMLOCK	
Hose & Thread Size	Part #
1-1/2"	DFSS-E150
2"	DFSS-E200
3"	DFSS-E300



DEF STAINLESS FEMALE CAMLOCK	
Hose & Thread Size	Part #
1-1/2"	DFSS-C150
2"	DFSS-C200
3"	DFSS-C300



DEF FERRULE	
Hose & Thread Size	Part #
1/2"	170-08
3/4"	170-12
1"	170-16
1-1/4"	DEF-125F
1-1/2"	DEF-150F
2"	DEF-200F





## DV10 TPR-W

- Tube:** TPR thermoplastic rubber hose
- Reinforcement:** Steel wire helix with orange wear strip
- Temperature:** -58°F to +275°F (-50°C to +135°C)
- Application:** TPR duct is well suited to most industrial ventilation and light material handling applications, and is also resistant to a wide variety of chemicals and solvents. The unique, flexible rubber compound has excellent tear and puncture resistance and functions well over a wide temperature range.

6

Part #	ID	Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	psi	in/Hg	in	lbs/ft	
DV10-200	2	19	28	3.5	0.25	25'- Coil
DV10-300	3	11	28	4.3	0.40	25'- Coil
DV10-400	4	9	25	6.5	0.67	25'- Coil
DV10-500	5	8	15	8.0	0.85	25'- Coil
DV10-600	6	7	11	8.8	0.87	25'- Coil
DV10-700	7	5	9	10.0	1.00	25'- Coil
DV10-800	8	4.5	5	12.0	1.20	25'- Coil
DV10-1000	10	4	5	12.5	2.20	25'- Coil
DV10-1200	12	3	4	13.7	2.70	25'- Coil
DV10-1400	14	2	2	18.0	3.00	25'- Coil





## DV22 Urethane Clear - MD

**Tube:** Clear polyurethane

**Reinforcement:** Bronze coated steel helix

**Temperature:** -65°F to +200°F (-53°C to +93°C)

**Application:** Polyurethane provides a much better abrasion and puncture resistance than PVC and has the added benefits of excellent chemical and oil resistance as well as a wide temperature range.

6

Part #	ID	Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	psi	in/Hg	in	lbs/ft	
DV22-200	2	30	28	3.0	0.25	25' - Coil
DV22-300	3	29	28	5.0	0.40	25' - Coil
DV22-400	4	25	28	6.5	0.70	25' - Coil
DV22-500	5	22	26	7.5	0.90	25' - Coil
DV22-600	6	19	23	8.5	1.00	25' - Coil
DV22-700	7	16	18	10.5	1.20	25' - Coil
DV22-800	8	14	13	12.0	1.50	25' - Coil
DV22-1000	10	11	6	14.0	1.60	25' - Coil
DV22-1200	12	10	5	16.0	2.00	25' - Coil
DV22-1400	14	8	3	18.0	2.50	25' - Coil
DV22-1600	16	2	2	24.0	4.23	25' - Coil



## DV30 Standard VAC (Z VAC)

- Tube:** Gray single wall polyethylene
- Reinforcement:** Blue polyethylene
- Temperature:** -40°F to +150°F (-40°C to +65°C)
- Application:** A flexible lightweight hose for vacuuming wet or dry materials.

Part #	ID	Max WP	Vacuum	Weight	Standard Pack
	in	psi	in/Hg	lbs/ft	
DV40-150	1-1/2	13	21	0.32	50'- Coil
DV40-200	2	13	21	0.49	50'- Coil
DV40-300	3	8	21	0.73	50'- Coil
DV40-400	4	8	21	1.10	50'- Coil



## DV40 Commercial VAC (G VAC)

- Tube:** Black polyethylene
- Reinforcement:** Blue polyethylene
- Temperature:** -40°F to +150°F (-40°C to +65°C)
- Application:** This crush-proof dual wall hose is designed to handle chemicals and temperatures encountered in professional carpet steam cleaning operations. The flat exterior cap prevents hang-ups around corners and therefore is also excellent for commercial car vacuum stations.

Part #	ID	Max WP	Vacuum	Weight	Standard Pack
	in	psi	in/Hg	lbs/ft	
DV40-150	1-1/2	13	21	0.32	50'- Coil
DV40-200	2	13	21	0.49	50'- Coil
DV40-300	3	8	21	0.73	50'- Coil
DV40-400	4	8	21	1.10	50'- Coil

## DV35 Cuffs



Part #	ID
	in
DV35-125	1-1/4
DV35-150	1-1/2
DV35-200	2

## DV38 Joiner



Part #	ID
	in
DV38-125	1-1/4
DV38-150	1-1/2
DV38-200	2



## FT41 Food Grade PVC Clearbraid

- Tube:** Clear PVC, FDA, USDA, 3A, NSF, UL, RoHS  
**Reinforcement:** Synthetic Fiber  
**Cover:** Clear PVC  
**Temperature:** +25°F to +150°F (-4°C to +65°C)  
**Application:** Its clear non-toxic tube makes it an excellent choice for marine, drinking water lines, beverage dispensing, potable water supply or in food processing applications and carpet cleaning.

**7**

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi @ 20°C / 70°F	lbs/ft	
FT41-019	3/16	0.16	4.0	250	0.04	100' - Coil
FT41-025	1/4	0.44	11.2	250	0.06	100' - Coil
FT41-031	5/16	0.53	13.5	250	0.08	100' - Coil
FT41-038	3/8	0.59	15.0	225	0.09	100' - Coil
FT41-050	1/2	0.75	19.0	200	0.13	100' - Coil
FT41-063	5/8	0.89	22.6	200	0.18	200' - Coil
FT41-075	3/4	1.03	26.2	150	0.22	100' - Coil
FT41-100	1	1.30	33.0	125	0.30	100' - Coil
FT41-125	1-1/4	1.62	41.1	100	0.45	100' - Coil
FT41-150	1-1/2	1.94	49.3	100	0.64	100' - Coil
FT41-200	2	2.49	63.3	75	0.94	100' - Coil



## FT45 Food Grade PVC - Oil

- Tube:** Clear PVC, FDA, USDA, 3A, NSF, UL, RoHS  
**Reinforcement:** Steel Wire Helix  
**Cover:** Clear PVC  
**Temperature:** +25°F to +150°F (-4°C to +65°C)  
**Application:** Its clear non-toxic tube makes it an excellent choice for marine, drinking water lines, beverage dispensing, potable water supply or in food processing applications and carpet cleaning.

Part #	ID	OD		Max WP	Vacuum in/Hg	Weight	Standard Pack
	in	in	mm	psi @ 20°C / 70°F	20°C / 70°F	lbs/ft	
FT45-025 *	1/4	0.46	11.7	150	29	0.07	100' - Coil
FT45-038 *	3/8	0.60	15.2	100	29	0.11	100' - Coil
FT45-050	1/2	0.75	19.0	100	29	0.15	100' - Coil
FT45-063	5/8	0.89	22.6	100	29	0.19	100' - Coil
FT45-075	3/4	1.03	26.2	70	29	0.24	100' - Coil
FT45-100	1	1.30	33.0	70	29	0.33	100' - Coil
FT45-125	1-1/4	1.61	40.9	70	29	0.50	50' - Coil
FT45-150	1-1/2	1.86	47.2	50	29	0.58	50' - Coil
FT45-200	2	2.39	60.7	50	29	0.84	50' - Coil
FT45-300	3	3.50	88.9	50	29	1.62	50' - Coil

\* Standard PVC - Not oil resistant Class A



## FT44 Clear Food Grade PVC

**Construction:** Clear PVC FDA and RoHS requirements

**Temperature:** +25°F to +150°F (-4°C to +65°C)

**Application:** Non-toxic clear food grade PVC tubing for general use applications

7

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
FT44-013-025	1/8	0.25	6.4	65	0.02	100' - Box
FT44-019-031	3/16	0.31	7.9	55	0.03	100' - Box
FT44-025-038	1/4	0.38	9.7	55	0.03	100' - Box
FT44-025-050	1/4	0.50	12.7	60	0.08	100' - Box
FT44-031-043	5/16	0.43	10.9	50	0.04	100' - Box
FT44-038-050	3/8	0.50	12.7	45	0.05	100' - Box
FT44-038-056	3/8	0.56	14.2	50	0.08	100' - Box
FT44-038-063	3/8	0.63	15.2	55	0.11	100' - Box
FT44-050-063	1/2	0.63	15.2	30	0.06	100' - Box
FT44-050-075	1/2	0.75	19.0	45	0.13	100' - Box
FT44-063-081	5/8	0.81	20.6	35	0.12	100' - Box
FT44-063-088	5/8	0.88	22.4	40	0.16	100' - Box
FT44-075-100	3/4	1.00	25.4	35	0.19	100' - Box
FT44-088-113	7/8	1.13	28.7	30	0.21	100' - Box
FT44-100-125	1	1.25	31.8	25	0.24	100' - Box
FT44-125-150	1-1/4	1.50	38.1	20	0.30	50' - Box
FT44-150-200	1-1/2	2.00	50.8	35	0.75	50' - Box
FT44-200-250	2	2.50	63.5	35	0.96	50' - Box



## FB04 WE Food Suction - Static Wire



**Tube & Cover:** Clear FDA approved PVC.

**Reinforcement:** Clear PVC helix with static wire

**Temperature:** -4°F to +150°F (-20°C to +66°C)

**Application:** Pneumatic conveying systems for powder, pellets or granular materials.

Part #	ID	OD		Max WP	Vacuum in/Hg	Weight
	in	in	mm	psi @ 20°C / 70°F	20°C / 70°F	lbs/ft
FB04-125	1-1/4	1.65	42.0	50	28	0.33
FB04-150	1-1/2	1.93	49.0	50	28	0.43
FB04-200	2	2.40	63.0	40	24	0.58
FB04-250	2-1/2	2.99	76.5	40	24	0.89
FB04-300	3	3.64	91.5	40	24	1.25
FB04-400	4	4.72	120.0	35	24	1.93
FB04-500	5	5.74	146.0	30	20	2.40
FB04-600	6	6.81	175.5	30	26	3.70





## FT10 Nitrile Food - Potable Water Hose

- Tube:** White smooth non-toxic FDA compliant nitrile rubber
- Reinforcement:** Multiple layers of mildew resistant synthetic fabric with wire helix
- Cover:** Blue flat corrugated, ozone and abrasion resistant rubber
- Temperature:** -40°F to +212°F (-40°C to +100°C)
- Application:** A very flexible hose for potable water, fatty and oily edible liquids. Used for gravity flow, pressure or suction applications in tank transfer or in-plant.
- Branding:** FORSAFLEX FT10-300 3" EXTRAFLEX NITRILE FOOD SUCTION - POTABLE WATER HOSE 150 MAX PSI

**7**

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi @ 20°C / 70°F	in	lbs/ft	
FT10-200	2	2.52	64.0	150	6.0	1.00	100' - Coil
FT10-300	3	3.58	91.0	150	8.0	1.69	100' - Coil



## WD40 Potable Water Hose



- Tube:** White PVC
- Reinforcement:** Synthetic fiber
- Cover:** Blue PVC
- Temperature:** -10°F to +150°F (-23°C to +65°C)
- Application:** A high purity, quality potable water hose, specifically designed for temporary water supply and bypass application.

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi @ 20°C / 70°F	lbs/ft	
FT10-200	2	2.52	64.0	150	1.00	100' - Coil
FT10-300	3	3.58	91.0	150	1.69	100' - Coil



## PW4/6 High Pressure Cleaning

- Tube:** Black synthetic rubber
- Reinforcement:** One/two braids of high tensile steel wire
- Cover:** Smooth black, blue, gray (yellow – oil resistant) abrasion & weather resistant synthetic rubber
- Packaging:** 50', 100' and reels
- Application:** Pressure wash equipment.

Part #	Cover	Max Temp		Steam Service	ID in	OD in	Max WP psi	Min BR in	Weight		Coupling
		°F	°C						lbs/ft		
PW4-06	Black	250	121	No	3/8	0.61	4,000	4.0	0.24	E	
PW4B-04	Blue	250	121	No	1/4	0.48	4,000	3.0	0.19	E	
PW4B-06	Blue	250	121	No	3/8	0.61	4,000	4.0	0.24	E	
PW4G-06	Gray	250	121	No	3/8	0.61	4,000	4.0	0.24	E	
PW4Y-06	Yellow	250	121	No	3/8	0.61	4,000	4.0	0.24	E	
PW6-06	Black	250	121	No	3/8	0.67	6,000	6.0	0.39	E	
PW6B-06	Blue	250	121	No	3/8	0.67	6,000	6.0	0.39	E	
PW6G-06	Gray	250	121	No	3/8	0.67	6,000	6.0	0.39	E	

## PW Pressure Wash Assemblies



Part #	Cover	Max Temp		Steam Service	ID in	Length ft	Max WP psi	Fitting A	Fitting B
		°F	°C						
PW4-06MMS050	Black	250	121	No	3/8	50'	4,000	NPT-Solid	NPT-Swivel
PW4-06MMS075	Black	250	121	No	3/8	75'	4,000	NPT-Solid	NPT-Swivel
PW4-06MMS100	Black	250	121	No	3/8	100'	4,000	NPT-Solid	NPT-Swivel
PW4B-06MMS050	Blue	250	121	No	3/8	50'	4,000	NPT-Solid	NPT-Swivel
PW4B-06MMS075	Blue	250	121	No	3/8	75'	4,000	NPT-Solid	NPT-Swivel
PW4B-06MMS100	Blue	250	121	No	3/8	100'	4,000	NPT-Solid	NPT-Swivel
PW4Y-06MMS050	Yellow	250	121	No	3/8	50'	4,000	NPT-Solid	NPT-Swivel
PW4Y-06MMS075	Yellow	250	121	No	3/8	75'	4,000	NPT-Solid	NPT-Swivel
PW4Y-06MMS100	Yellow	250	121	No	3/8	100'	4,000	NPT-Solid	NPT-Swivel
PW4G-06MMS050	Gray	250	121	No	3/8	50'	4,000	NPT-Solid	NPT-Swivel
PW4G-06MMS075	Gray	250	121	No	3/8	75'	4,000	NPT-Solid	NPT-Swivel
PW4G-06MMS100	Gray	250	121	No	3/8	100'	4,000	NPT-Solid	NPT-Swivel
PW6-06MMS050	Black	250	121	No	3/8	50'	6,000	NPT-Solid	NPT-Swivel
PW6-06MMS075	Black	250	121	No	3/8	75'	6,000	NPT-Solid	NPT-Swivel
PW6-06MMS100	Black	250	121	No	3/8	100'	6,000	NPT-Solid	NPT-Swivel
PW6B-06MMS050	Blue	250	121	No	3/8	50'	6,000	NPT-Solid	NPT-Swivel
PW6B-06MMS075	Blue	250	121	No	3/8	75'	6,000	NPT-Solid	NPT-Swivel
PW6B-06MMS100	Blue	250	121	No	3/8	100'	6,000	NPT-Solid	NPT-Swivel
PW6G-06MMS050	Gray	250	121	No	3/8	50'	6,000	NPT-Solid	NPT-Swivel
PW6G-06MMS075	Gray	250	121	No	3/8	75'	6,000	NPT-Solid	NPT-Swivel
PW6G-06MMS100	Gray	250	121	No	3/8	100'	6,000	NPT-Solid	NPT-Swivel





## SK20 Steam Cleaner/Pressure Wash Hose

- Tube:** Black synthetic rubber
- Reinforcement:** Two braids of high tensile steel wire
- Cover:** Smooth black oil and abrasion resistant synthetic rubber
- Packaging:** Reels
- Application:** Is used on either steam cleaner machines or combination steam cleaner/pressure wash machines.

### STEAM SERVICE - UP TO 325°F (163°C)

Part #	ID		OD		Max WP	Min BR		Weight	Two Piece Ferrule	Two Piece Insert
	in	mm	in	mm	psi	in	mm	lbs/ft		
SK20-06	3/8	9.5	0.58	14.8	350	4.0	101.6	0.28	SK20-06F	SK06-06MP
SK20-08	1/2	12.7	0.80	20.4	350	4.5	114.3	0.35	SK20-08F	SK08-08MP

#### WARNING!




- Must pin-prick for steam service
- Must use Forsaflex fittings & ferrules shown below
- Cannot use Male Pipe (MP) fittings for steam
- (No swivels on steam)


### STEAM SERVICE - UP TO 250°F (121°C)

Part #	ID		OD		Max WP	Min BR		Weight	Two Piece Ferrule	Two Piece Insert
	in	mm	in	mm	psi	in	mm	lbs/ft		
SK20-06	3/8	9.5	0.58	14.8	6,000	4.0	101.6	0.28	SK20-06F	SK06-06MP
SK20-08	1/2	12.7	0.80	20.4	6,000	4.5	114.3	0.35	SK20-08F	SK08-08MP

#### SK20 NO SKIVE FERRULE



Part #	ID	D	L
	in	mm	mm
SK20-06F	3/8	25.0	28.0
SK20-08F	1/2	28.0	28.0



#### SK20 TWO-PIECE INSERT

Part #	ID	F	H	
	in		mm	in
SK06-06MP	3/8	3/8 - 18	28.6	1.12
SK08-08MP	1/2	1/2 - 14	35.0	1.38

### SK20 - STEAM CLEANER ASSEMBLY

Part #	ID	Length	Fitting A	Fitting B
	in	ft		
SK20-06MM50	3/8	50	NPT-Solid	NPT-Solid
SK20-06MM100	3/8	100	NPT-Solid	NPT-Solid
SK20-08MM50	1/2	50	NPT-Solid	NPT-Solid
SK20-08MM100	1/2	100	NPT-Solid	NPT-Solid





## WBD Waterblast Hose

- Tube:** Black synthetic rubber
- Reinforcement:** Four spiral wire
- Cover:** Black abrasion and weather resistant rubber
- Temperature:** -30°C to +70°C (-22°F to +158°F)
- Application:** Very high pressure water blasting

**Branding:** WBD15-08 1/2" WATERBLAST 16000 PSI MAX WP

Part #	ID	OD		Max WP	Min BR	Weight
	in	in	mm	psi	in	lbs/ft
WBD10-08	1/2	0.97	24.6	10,000	8.0	0.61
WBD10-12	3/4	1.27	32.2	10,000	8.3	0.98
WBD10-16	1	1.53	38.9	10,000	12.6	1.34
WBD15-06	3/8	0.84	21.4	18,000	6.0	0.58
WBD15-08	1/2	1.00	25.4	16,000	8.0	0.76
WBD15-12	3/4	1.26	32.0	14,500	11.0	1.14
WBD20-08	1/2	1.16	29.5	20,000	8.0	0.97



Part #	ID	Max WP	Length	Fitting
	in	psi	ft	
WBD10-08MM025	1/2	10,000	25	Male NPT
WBD10-08MM050	1/2	10,000	50	Male NPT
WBD15-06MM006	3/8	18,000	6	Male NPT
WBD15-06MM010	3/8	18,000	10	Male NPT
WBD15-06MM025	3/8	18,000	25	Male NPT
WBD15-06MM050	3/8	18,000	50	Male NPT
WBD15-06MM100	3/8	18,000	100	Male NPT
WBD15-08MM006	1/2	16,000	6	Male NPT
WBD15-08MM010	1/2	16,000	10	Male NPT
WBD15-08MM025	1/2	16,000	25	Male NPT
WBD15-08MM050	1/2	16,000	50	Male NPT
WBD15-08MM100	1/2	16,000	100	Male NPT
WBD15-12MM025	3/4	14,500	25	Male NPT
WBD15-12MM050	3/4	14,500	50	Male NPT
WBD15-12MM100	3/4	14,500	100	Male NPT
WBD10-16MM025	1	10,000	25	Male NPT
WBD10-16MM050	1	10,000	50	Male NPT
WBD10-16MM100	1	10,000	100	Male NPT
WBD15-08EE050	1/2	16,000	50	F - Metric
WBD20-08EE050	1/2	20,000	50	F - Metric

\*All Waterblast hose is tested and sold as factory assemblies only. Other lengths available. Consult factory.





## QWB/QWS Waterblast Quick Disconnects

### QWB Waterblast Coupling

Application: Waterblast

Interchangeability: Dixon EA, Parker WB, Aeroquip FD69, Snap-Tite 56

Temperature Range: -40°F to +158°F (-40°C to +70°C)



Part #	Size	Thread Size	Max WP	Material	Locking Method
			psi		
QWBC86FP	1/2"	3/8" F - NPT	10,000	Steel	Ball Bearing
QWBC88FP	1/2"	1/2" F - NPT	10,000	Steel	Ball Bearing



Part #	Size	Thread Size	Max WP	Material
			psi	
QWBN86FP	1/2"	3/8" F - NPT	10,000	Steel
QWBN88FP	1/2"	1/2" F - NPT	10,000	Steel

### QWS Waterblast Screw to Connect

Application: Waterblast

Interchangeability: Dixon 4TDF4-SS, Spirstar, CQD, DNP CRS

Temperature Range: -40°F to +158°F (-40°C to +70°C)



Part #	Size	Thread Size	Max WP	Material
			psi	
QWSC86FP-S6	1/2"	3/8" F - NPT	15,000	316 Stainless
QWSC88FP-S6	1/2"	1/2" F - NPT	15,000	316 Stainless



Part #	Size	Thread Size	Max WP	Material
			psi	
QWSN86FP-S6	1/2"	3/8" F - NPT	15,000	316 Stainless
QWSN88FP-S6	1/2"	1/2" F - NPT	15,000	316 Stainless



Part #	Size	Thread Size	Max WP	Material
			psi	
QWSC86-SET	1/2" / 1/2"	3/8" F - NPT / 3/8" F - NPT	15,000	Stainless
QWSC88-SET	1/2" / 1/2"	1/2" F - NPT / 1/2" F - NPT	15,000	Stainless

QD Set

Male + Female





## SCH Sewer Cleaning Hose

8

- Tube:** Yellow olefin
- Reinforcement:** Synthetic fiber
- Cover:** Polyurethane - orange for 2500 psi, blue for 3000 psi, green for 4,000 psi, red for 5,000 psi.
- Temperature:** -40°F to +160°F (-40°C to +71°C)
- Packaging:** Coils
- Application:** Sewer Cleaning hose is constructed from materials selected to provide rugged and reliable service under the most severe and demanding conditions found in high pressure sewer cleaning.

Part #	Cover	ID	OD		Max WP	Min BR	Weight	Standard Pack
		in	in	mm	psi	in	lbs/ft	
SCH-2500-16-500	Orange	1	1.46	37.0	2,500	6.0	0.40	500' - Roll
SCH-2500-16-600	Orange	1	1.46	37.0	2,500	6.0	0.40	600' - Roll
SCH-2500-16-800	Orange	1	1.46	37.0	2,500	6.0	0.40	800' - Roll
SCH-3000-16-500	Blue	1	1.46	37.0	3,000	8.0	0.41	500' - Roll
SCH-3000-16-600	Blue	1	1.46	37.0	3,000	8.0	0.41	600' - Roll

*Factory Crimped with Male NPT each end*

Part #	Cover	ID	OD		Max WP	Min BR	Weight	Standard Pack
		in	in	mm	psi	in	lbs/ft	
SLGR-02	Green	1/8	0.32	8.1	4,000	1.3	0.04	Coil
SLGR-03	Green	3/16	0.41	10.4	4,000	1.8	0.05	Coil
SLGR-04	Green	1/4	0.50	12.7	4,000	2.5	0.06	Coil
SLGR-06	Green	3/8	0.65	16.5	4,000	3.0	0.11	Coil
SLGR-08	Green	1/2	0.83	21	4,000	4.0	0.16	Coil
SLRD-04	Red	1/4	0.50	12.2	5,000	2.5	0.05	Coil
SLRD-06	Red	3/8	0.65	16.5	5,000	3.0	0.13	Coil





## MT10 Thunderblast® Sandblast Hose - 4ply

- Tube:** Premium black abrasion resistant rubber (abrasion factor)  
**Reinforcement:** Synthetic fiber  
**Cover:** Black static conductive synthetic rubber  
**Temperature:** -25°F to +180°F (-32°C to +82°C)  
**Application:** For conducting sand, steel shot, and other abrasives for blast cleaning.

- Branding:** FORSAFLEX MT10-100 1" THUNDERBLAST HOSE 175 PSI MAX WP  
**Abrasion Loss:** According to ISO 45649 / DIN 53516 ≤ 60 mm1

9

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
MT10-050	1/2	1-3/16	30.0	175	0.38	50', 100' - Coil
MT10-075	3/4	1-1/2	38.0	175	0.69	50', 100', 200' - Coil
MT10-100	1	1-7/8	48.0	175	1.03	50', 100', 200' - Coil
MT10-125	1-1/4	2-5/32	54.0	175	1.23	50', 100', 200' - Coil
MT10-150	1-1/2	2-3/8	60.0	150	1.33	50', 100', 200' - Coil
MT10-200	2	2-7/8	72.0	150	1.66	50', 100', 200' - Coil



## MT10 Thunderblast® Assemblies

Part #	Hose Size	Fitting A	Fitting B	Length	Attaching Method
				ft	
MT10-050QQC050	1/2	Q05	Q05	50	Screws
MT10-075QQC050	3/4	Q1	Q1	50	Screws
MT10-100QQC050	1	Q2	Q2	50	Screws
MT10-125QQC050	1-1/4	Q3	Q3	50	Screws
MT10-150QQC050	1-1/2	Q4	Q4	50	Screws
MT10-050QNH050	1/2	Q05	NH05	50	Screws
MT10-075QNH050	3/4	Q1	NH1	50	Screws
MT10-100QNH050	1	Q2	NH2	50	Screws
MT10-125QNH050	1-1/4	Q3	NH3	50	Screws
MT10-150QNH050	1-1/2	Q4	NH4	50	Screws



## MT11 Compact Thunderblast® Sandblast Hose - 2 Ply

- Tube:** Black abrasion resistant rubber
- Reinforcement:** Synthetic fiber
- Cover:** Black static conductive synthetic rubber
- Temperature:** -25°F to +180°F (-32°C to +82°C)
- Application:** For conducting sand, steel shot, and other abrasives for blast cleaning.
  
- Branding:** FORSAFLEX MT11-100 1" THUNDERBLAST HOSE 175 PSI MAX WP
- Abrasion Loss:** According to ISO 45649 / DIN 53516 ≤ 60 mm1

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
MT11-050	1/2	1-1/16	26.9	175	0.36	50', 100' - Coil
MT11-075	3/4	1-5/16	33.3	175	0.48	50', 100', 200' - Coil
MT11-100	1	1-1/2	38.1	175	0.78	50', 100', 200' - Coil
MT11-125	1-1/4	1-7/8	47.8	175	0.83	50', 100', 200' - Coil



## MT11 Thunderblast® Assemblies

Part #	Hose Size	Fitting A	Fitting B	Length	Attaching Method
				ft	
MT11-050QQC050	1/2	Q05A	Q05A	50	Screws
MT11-100QQC050	1	Q1	Q1	50	Screws
MT11-125QQC050	1-1/4	Q2	Q2	50	Screws
MT11-050QNH050	1/2	Q05A	NH05A	50	Screws
MT11-100QNH050	1	Q1	NH1	50	Screws
MT11-125QNH050	1-1/4	Q2	NH2	50	Screws

\* Aluminum fittings standard.



## CN10 Eaglecrete® Textile Placement

- Tube:** Black abrasion resistant synthetic rubber
- Reinforcement:** Synthetic cord
- Cover:** Black abrasion resistant synthetic rubber
- Temperature:** -40°F to +180°F (-40°C to +82°C)
- Application:** Conducting wet cement, plaster, grout, and concrete at high pressure.

**Branding:** FORSAFLEX CN10-200 2" EAGLECRETE TEXTILE PLACEMENT 1233 PSI MAX WP

9

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
CN10-125	1-1/4	1.92	48.8	1233	0.82	100' - Coil
CN10-150	1-1/2	2.31	58.7	1233	1.22	100' - Coil
CN10-200	2	2.83	72.0	1233	1.61	100' - Coil
CN10-250	2-1/2	3.40	86.3	1233	2.02	100' - Coil
CN10-300	3	3.92	99.6	1233	2.45	100' - Coil
CN10-350	3-1/2	4.01	117.8	1233	3.51	100' - Coil
CN10-400	4	4.96	126.0	1233	3.18	100' - Coil
CN10-450	4-1/2	5.62	142.7	1233	4.22	100' - Coil
CN10-500	5	6.04	153.3	1000	4.28	100' - Coil



## CN10 Eaglecrete® Textile Assemblies

Part #	Hose Size	Fitting A	Fitting B	Flange QD	Length	Attaching Method
				in	ft	
CN10-150MM50	1-1/2	M-NPT	M-NPT	--	50	Crimp
CN10-200MM25	2	M-NPT	M-NPT	--	25	Crimp
CN10-200MM50	2	M-NPT	M-NPT	--	50	Crimp
CN10-200RR25	2	Raised	Raised	3.1	25	Crimp
CN10-200RR50	2	Raised	Raised	3.1	50	Crimp
CN10-250RR25	2-1/2	Raised	Raised	3.3	25	Crimp
CN10-250RR50	2-1/2	Raised	Raised	3.3	50	Crimp
CN10-300RR10	3	Raised	Raised	4.2	10	Crimp
CN10-300RR12	3	Raised	Raised	4.2	12	Crimp
CN10-300RR020	3	Raised	Raised	4.2	20	Crimp
CN10-300RR025	3	Raised	Raised	4.2	25	Crimp
CN10-400RR010	4	Raised	Raised	5.2	10	Crimp
CN10-400RR020	4	Raised	Raised	5.2	20	Crimp
CN10-400RR025	4	Raised	Raised	5.2	25	Crimp
CN10-500RR010	5	Raised	Raised	6.3	10	Crimp

## CN20 Eaglecrete® Wire Placement



- Tube:** Black abrasion resistant synthetic rubber
- Reinforcement:** Steel wire
- Cover:** Black abrasion resistant synthetic rubber
- Temperature:** -40°F to +180°F (-40°C to +82°C)
- Application:** Conducting wet cement, plaster, grout, and concrete at high pressure.

**Branding:** FORSAFLEX CN20-400 4" EAGLECRETE® WIRE PLACEMENT 1300 PSA MAX WP

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
CN20-200	2	2.76	70.0	1300	10.82	2.04	50' / 100' - Coil
CN20-250	2-1/2	3.46	88.0	1300	11.81	3.01	50' / 100' - Coil
CN20-300	3	4.02	102.0	1300	13.78	3.67	50' / 100' - Coil
CN20-400	4	5.12	130.0	1300	15.75	5.68	10' / 100' - Coil
CN20-500	5	6.10	155.0	1300	19.69	6.47	10' / 100' - Coil

## CN20 Eaglecrete® Wire Assemblies



HEAVY-DUTY = R  
148MM = E

Part #	Hose Size	Fitting A	Fitting B	Flange QD	Length	Attaching Method
				in	ft	
CN20-200RR025	2	Raised	Raised	3.1	25	Crimp
CN20-200RR050	2	Raised	Raised	3.1	50	Crimp
CN20-250RR025	2-1/2	Raised	Raised	3.3	25	Crimp
CN20-250RR050	2-1/2	Raised	Raised	3.3	50	Crimp
CN20-300RR010	3	Raised	Raised	4.2	10	Crimp
CN20-300RR050	3	Raised	Raised	4.2	50	Crimp
CN20-400RR010	4	Raised	Raised	5.2	10	Crimp
CN20-400RR012	4	Raised	Raised	5.2	12	Crimp
CN20-400RR020	4	Raised	Raised	5.2	20	Crimp
CN20-500RR010	5	Raised	Raised	6.3	10	Crimp
CN20-500RR012	5	Raised	Raised	6.3	12	Crimp
CN20-500RR020	5	Raised	Raised	6.3	20	Crimp
CN20-500EE010	5	148mm	148mm	5.8	10	Crimp
CN20-500EE012	5	148mm	148mm	5.8	12	Crimp
CN20-500EE020	5	148mm	148mm	5.8	20	Crimp

*Other lengths and fitting combinations are available.*



## CN25 Gunite Hose

- Tube:** Tan pure gum rubber
- Reinforcement:** Multiple plies of synthetic fabric with an imbedded static wire
- Cover:** Non marking pure gum blend
- Temperature:** -22°F to +185°F (-30°C to +85°C)
- Application:** Ultra wear resistant and thick tube, designed for high kink resistance and perfect flow, suitable for air pumping dry sand or cement mixtures to the water mixing nozzle in gunite applications.
- Branding:** FORSAFLEX CN25-200 2" GUNITE HOSE 150 PSI MAX WP

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
CN25-150	1-1/2	2.38	60.5	150	1.17	100'
CN25-200	2	2.88	73.2	150	1.46	100'



## CN30 Flexcrete® Mortar TPU Hose

- Tube:** Extruded thermoplastic polyether based polyurethane (TPU)
- Reinforcement:** Circular woven Aramid Fiber, "extra-strong yarn"
- Cover:** Extruded TPU orange cover
- Temperature:** -58°F to +149°F (-50°C to +65°C)
- Application:** Designed as a lay-flat boom tip hose ideal for ICF forms, columns, and tall walls where space is at a minimum.
- Branding:** FORSAFLEX CN30-400 4" FLEXCRETE® MORTAR TPU 1250 PSI MAX WP

Part #	Cover	ID	OD		Max WP	Min BP	Weight	Standard Pack
		in	in	mm	psi	psi	lbs/ft	
CN30-400	Orange	4	0.17	4.3	1250	2500	1.34	100'
CN30-500	Orange	5	0.17	4.3	1250	2500	1.48	100'



## MT30 Dry Material Discharge Hose

- Tube:** Synthetic abrasion resistant rubber
- Reinforcement:** Synthetic fiber
- Cover:** Black abrasion synthetic rubber
- Temperature:** -22°F to +185°F (-30°C to +85°C)
- Application:** Discharge hose used for dry bulk commodities, including limestone, ground silica, chalk, frac sand and dry cement.
- Branding:** FORSAFLEX MT30-400B 4" DRY MATERIAL DISCHARGE 100 PSI MAX WP

Part #	ID	OD		Max WP	Tube Gauge	Weight	Standard Pack	Tube Thickness Gauge
	in	in	mm	psi		lbs/ft		
MT30-400B	4	4.57	116.0	100	3/16	1.90	100' - Coil	A = 1/8
MT30-400C	4	4.69	119.0	100	1/4	2.09	100' - Coil	B = 3/16
MT30-450B	4-1/2	4.92	231.0	100	3/16	1.37	100' - Coil	C = 1/4
MT30-500C	5	5.67	144.0	100	1/4	2.83	100' - Coil	D = 5/16
								E = 3/8



## MT35 Hot Air Blower

- Tube:** Black specially compounded heat resistant synthetic rubber
- Reinforcement:** A high tensile steel helix embedded between layers of textile cords
- Cover:** Tan, heat, weather and ozone resistant cover
- Temperature:** -30°F to +350°F (-35°C to +180°C)
- Application:** For conveying hot air from blower to tank on dry bulk trucks
- Branding:** FORSAFLEX MT35-300 3" HOT AIR BLOWER HOSE 150 PSI MAX WP

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
MT35-300	3	3.54	90.0	150	26	12.0	1.76	100' - Coil
MT35-400	4	4.65	118.0	150	26	16.1	2.68	100' - Coil





## MT50 Mine Corrugated Material Transfer

**Tube:** Natural rubber

**Reinforcement:** High tensile textile cord and steel wire helix, with anti-static wire

**Cover:** Black abrasion resistant rubber, corrugated for flexibility and match internal corrugations of split flange coupling

**Temperature:** -40°F to +160°F (-40°C to +71°C)

**Application:** Primarily designed for handling abrasive slurries in mines and quarries. Can also be used for dry material handling of sand, gravel, grain, slag, and other such materials. External re-usable bolt on flanges allow for ease of installation, and uninterrupted free flow.

9

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
MT50-300	3	4.50	114.3	150	26	14.0	4.63	100' - Coil
MT50-400	4	5.30	134.6	150	26	18.0	5.67	100' - Coil
MT50-600	6	7.50	190.5	150	26	28.0	9.48	100' - Coil
MT50-800	8	9.50	241.3	150	26	48.0	14.20	60' - Coil
MT50-1000	10	11.50	292.1	150	26	60.0	16.63	40' - LG
MT50-1200	12	13.75	349.3	150	26	90.0	23.40	20' - LG

### ALUMINUM FLANGE



Part #	ID
	in
SFA-300	3
SFA-400	4
SFA-600	6
SFA-800	8
SFA-1000	10
SFA-1200	12

### GASKET



Part #	ID
	in
SFG-300	3
SFG-400	4
SFG-600	6
SFG-800	8
SFG-1000	10
SFG-1200	12

9



## MT60/MT61 Industrial Vacuum - PU

- Tube:** Polyurethane
- Reinforcement:** Rigid PVC Helix PVC/Polyurethane
- Cover:** -40°F to +150°F (-40°C to +65°C)
- Temperature:** Used in a variety of material handling application where a good resistance to abrasion is required, such as transfer of sands, plastic pellets, gravel, wood chips, slurries and fly ash. Cover is a specially formulated static dissipative compound with low temperature flexibility
- Application:**

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
MT60-150	1-1/2	1.85	47.0	50	28	2.0	0.42	100' - Coil
MT60-200	2	2.40	61.0	40	28	3.0	0.59	100' - Coil
MT60-250	2-1/2	3.07	78.0	40	28	3.0	0.80	100' - Coil
MT60-300	3	3.64	92.5	40	28	4.0	1.18	100' - Coil
MT60-400	4	4.76	121.0	35	28	6.0	1.95	100' - Coil
MT60-500	5	5.75	146.0	35	28	10.0	2.42	100' - Coil
MT60-600	6	6.81	173.0	35	28	12.0	3.50	100' - Coil
MT60-800	8	9.18	233.0	30	28	18.0	5.91	20/50' - LG
MT60-1000	10	11.60	244.5	22	24	26.0	9.90	20' - LG

\* Counter-clockwise / left hand helix - MT60

\* Clockwise / right hand helix - MT61



## MT65 Industrial Vacuum 180AR

- Tube:** SBR rubber blended with static carbon black, smooth bore
- Reinforcement:** Rigid PVC Helix
- Cover:** Corrugated O.D
- Temperature:** -40°F to 140°F (-40°C to +60°C)
- Application:** Heavy-duty abrasion resistant suction hose for vacuum trucks or handling abrasives such as crushed rock, sand, pea gravel, cement powder, dry fertilizer, iron ore and grains

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
MT65-125	1-1/4	1.6	40.6	45	29.8	2	0.31	100
MT65-150	1-1/2	1.9	48.3	45	29.8	2	0.37	100
MT65-200	2	2.4	61.0	40	29.8	2.5	0.5	100
MT65-250	2-1/2	3	76.2	35	29.8	2.5	0.88	100
MT65-300	3	3.5	88.9	35	29.8	3	1.1	100
MT65-350	3-1/2	4.11	104.4	30	29.8	4	1.35	100
MT65-400	4	4.63	117.6	30	29.8	4.5	1.77	50, 100
MT65-500	5	5.76	146.3	30	28	5	2.47	50, 100
MT65-600	6	6.8	172.7	30	28	9.2	3.08	50, 100
MT65-700	7	7.83	198.9	30	27	14	4.1	50
MT65-800	8	9.04	229.6	30	27	15	5.65	50
MT65-1000	10	11.18	284.0	28	25	30	8.88	20
MT65-1200	12	13.31	338.1	25	25	40	10.43	20





## MT67 Industrial Vacuum High Temp 180HR

- Tube:** Smooth SBR rubber blended with static carbon black  
**Reinforcement:** Steel helix  
**Cover:** SBR corrugated  
**Temperature:** -40°F to +220°F (-40°C to +60°C)  
**Application:** Heavy duty abrasive resistant suction hose for vacuum trucks or handling abrasives such as crushed rock, sand, pea gravel, cement, dry fertilizer, iron ore, and grains.

**9**

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
MT67-300	3	3.51	89.2	35	29	3.0	1.20	100' - coil
MT67-400	4	4.10	119.0	30	29	5.5	1.77	100' - coil
MT67-500	5	5.75	146.0	30	28	8.5	2.61	100' - coil
MT67-600	6	6.90	175.0	30	28	10.0	3.45	100' - coil
MT67-800	8	9.11	231.0	30	27	15.0	6.02	100' - coil

\* Clockwise / right hand helix



## MT70 Bulkmaster Hardwall Suction Hose

- Tube:** Tan abrasion resistant natural rubber
- Reinforcement:** A high tensile steel helix embedded between layers of textiles cords-anti-static wire
- Cover:** Black abrasion resistant rubber, corrugated for flexibility
- Temperature:** -40°F to +185°F (-40°C to +85°C)
- Application:** For tank truck, in-plant service and hydro excavation. Used to convey abrasive materials such as sand, limestone, and plastic pallets.
- Branding:** FORSAFLEX MT70-800 8" BULKMASTER HARDWALL SUCTION 75 PSI MAX WP

Part #	ID		OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	in	mm	psi	in/Hg	in	lbs/ft	
MT70-300	3	3.86	98.0		75	29	10.5	2.45	100' - Coil
MT70-400	4	4.92	125.0		75	29	16.1	3.66	100' - Coil
MT70-500	5	5.91	150.0		75	29	20.0	4.46	100' - Coil
MT70-600	6	6.89	175.0		75	29	24.0	5.25	100' - Coil
MT70-800	8	9.24	234.0		75	28	32.0	9.36	100' - Coil
MT70-1000	10	11.8	284.0		75	29	40.0	16.51	25' Lengths
MT70-800-27-SC	8	9.24	234.0		75	29	32.0	9.36	27' - LG
MT70-800-32-SC	8	9.24	234.0		75	29	32.0	9.36	32' - LG

\* Soft cuffs - SC

\* Split flanges are available



## MT71 Eagle Vac Suction Hose

- Tube:** 5/16" Smooth white NR, abrasion resistant
- Reinforcement:** High tensile textile cord, steel helix - antistatic wire
- Cover:** NR/SBR green, corrugated, abrasion, weather and ozone resistant
- Temperature:** -40°F to +185°F (-40°C to +85°C)
- Application:** Special hose for VAC truck applications for transport of dry or wet media such as mud, sand or blasting media.
- Branding:** FORSAFLEX MT71-800 8" EAGLE VAC SUCTION HOSE 45 PSI MAX WP

Part #	ID		OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	in	mm	psi	in/Hg	in	lbs/ft	
MT71-800	8	9.17	232.9		45	29	43	9.07	100' - Coil





## MHB60 Stainless Steel Metal Hose - Double Braid

**Tube:** 316 corrugated stainless steel

**Reinforcement:** 304 stainless steel single and double braid

**Application:** For use with petroleum, chemical, steel, and power generation plants. Can also be used in heating, pump, ventilation, and air conditioning systems. It is designed for hot or cold media transfers, such as hot oil and lube oil transfers. Can also be used for jump lines and loading arms or terminal loading/off loading products.

10

## Metal Hose Assemblies - 316 Stainless Wetted Parts



Floating x Floating

Part #	Hose Size	Length	Fitting A*	Fitting B*	Max WP	Weight/Assy
		ft			psi	lbs
MHB60-075-50	3/4"	50	Hex MNPT	Hex MNPT	1485	35
MHB60-200-010	2"	10	Floating	Floating	275	27.0
MHB60-200-020	2"	20	Floating	Floating	275	42.0
MHB60-200-020-300	2"	20	300lb Floating	300lb Floating	696	46.0
MHB60-300-010	3"	10	Floating	Floating	275	44.0
MHB60-300-020	3"	20	Floating	Floating	275	66.0
MHB60-300-020-300	3"	20	300lb Floating	300lb Floating	421	76.0
MHB60-400-010	4"	10	Floating	Floating	275	64.0
MHB60-400-020	4"	20	Floating	Floating	275	95.0
MHB60-400-020-300	4"	20	300lb Floating	300lb Floating	377	115
MHB60-600-010	6"	10	Floating	Floating	232	105.0
MHB60-600-020	6"	20	Floating	Floating	232	161.0
MHB60-800-010	8"	10	Floating	Floating	174	172.0
MHB60-800-020	8"	20	Floating	Floating	174	264.0
MHB60-1000-010	10"	10	Floating	Floating	174	254.0
MHB60-1000-020	10"	20	Floating	Floating	174	392.0
MHB60-1200-010	12"	10	Floating	Floating	130	355.0
MHB60-1200-020	12"	20	Floating	Floating	130	528.0

\*Built with 304 stainless steel and either 150lb floating x 150lb floating flanges or 300lb floating x 300lb floating (see table).

See [derating chart next page](#)

## Metal Hose Temperature Derating

To calculate a working pressure derated for elevated temperature, multiply the hose working pressure shown in the catalog by the appropriate derating factor below.

10

**NOTE!**



The working pressure of an assembly at elevated temperatures may be affected by fitting type, material and method of attachment.

Temp Deg °F	T304 T301*	T304L	T316	T316L	T321	T430	Copper	CS76	"Monel 400 & C22"	Inconel 600	Inconel 625	Carbon Steel*	Alum. 3003 H14
100.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
200.00	1.00	1.00	1.00	1.00	1.00	1.00	0.80	1.00	0.88	1.00	1.00	1.00	1.00
300.00	1.00	1.00	1.00	1.00	1.00	0.98	0.78	1.00	0.82	1.00	1.00	1.00	0.64
400.00	0.95	0.93	0.97	0.93	1.00	0.96	0.50	1.00	0.79	1.00	1.00	1.00	0.34
500.00	0.88	0.86	0.90	0.86	0.96	0.95	0.13	0.99	0.79	1.00	0.97	0.95	--
600.00	0.82	0.81	0.85	0.81	0.91	0.93	--	0.93	0.79	1.00	0.95	0.87	--
650.00	0.81	0.79	0.84	0.79	0.89	0.91	--	0.90	0.79	1.00	0.94	0.85	--
700.00	0.80	0.77	0.82	0.77	0.87	0.88	--	0.88	0.79	1.00	0.93	0.83	--
750.00	0.78	0.75	0.81	0.75	0.86	0.86	--	0.86	0.79	1.00	0.93	0.65	--
800.00	0.76	0.74	0.80	0.74	0.84	0.82	--	0.84	0.79	1.00	0.93	0.54	--
850.00	0.75	0.72	0.79	0.72	0.84	0.52	--	0.83	0.79	0.99	0.93	0.44	--
900.00	0.73	0.71	0.78	0.71	0.83	0.49	--	0.82	0.76	0.95	0.93	0.33	--
950.00	0.72	0.69	0.77	0.69	0.81	0.43	--	0.81	0.71	0.95	0.93	0.23	--
1,000.00	0.69	0.67	0.77	0.67	0.81	0.32	--	0.80	0.48		0.93	--	--
1,050.00	0.61	0.65	0.73	0.65	0.70	0.32	--	0.68	0.48	0.42	0.93	--	--
1,100.00	0.49	0.61	0.62	0.61	0.55	0.32	--	0.55	0.48	0.27	0.69	--	--
1,150.00	0.39	0.53	0.49	0.52	0.41	0.32	--	0.47	0.48	0.20	0.57	--	--
1,200.00	0.30	0.38	0.37	0.38	0.32	--	--	0.36	--	--	0.36	--	--
1,250.00	0.24	0.28	0.28	0.28	0.25	--	--	0.29	--	--	0.36	--	--
1,300.00	--	0.21	0.21	0.21		--	--		--	--	0.36	--	--
<b>ASTM</b>	A269	A269	A269	A269	A312	A268	B68	B622	B165	B167	B443	BA53	B210
<b>Form</b>	Pipe	Pipe	Pipe	Pipe	Pipe	Pipe	Tube	Pipe	Pipe	Pipe	Pipe	Pipe	Pipe

\* Do not use for temperature below 32°F.





## PH10 Oilflex® Tank Truck

- Tube:** Black nitrile for maximum oil resistant
- Reinforcement:** A high tensile steel helix embedded between layers of textile cords
- Cover:** Red flat corrugated oil and weather resistant rubber
- Temperature:** -40°F to +190°F (-40°C to +88°C)
- Application:** An all purpose lightweight and flexible petroleum suction and discharge hose for use with gasoline, diesel, hydraulic return lines, oil suspensions and emulsions.
- Branding:** FORSAFLEX PH10-200 2" OILFLEX® TANK TRUCK 150 PSI MAX WP

11

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
PH10-100	1	1.43	36.4	150	26	2.5	0.54	100' - Coil
PH10-125	1-1/4	1.69	43.0	150	26	3.0	0.67	100' - Coil
PH10-150	1-1/2	1.93	49.0	150	26	3.4	0.84	100' - Coil
PH10-200	2	2.47	62.8	150	26	5.0	1.10	100' - Coil
PH10-250	2-1/2	2.97	75.5	150	26	5.5	1.41	100' - Coil
PH10-300	3	3.51	89.2	150	26	8.0	1.72	100' - Coil
PH10-400	4	4.55	115.6	150	26	12.5	2.27	100' - Coil
PH10-600	6	6.70	168.4	150	26	24.0	4.77	100' - Coil
PH10-800	8	8.90	232.2	150	26	33.0	6.02	100' - Coil



## PH14 Smooth Tank Truck-SAE 100R4

- Tube:** Black nitrile for maximum oil resistant
- Reinforcement:** A high tensile steel helix embedded between layers of textile cords
- Cover:** Black smooth oil and weather resistant rubber
- Temperature:** -40°F to +190°F (-40°C to +88°C)
- Application:** An all purpose lightweight and flexible petroleum suction and discharge hose for use with gasoline, diesel, hydraulic return lines, oil suspensions and emulsions.
- Branding:** FORSAFLEX® PH14-200 2" TANK TRUCK HOSE - EXCEEDS SAE100R4 150 PSI MAX WP

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
PH14-125	1-1/4	1.77	45.0	200	27	2.76	0.79	100' - Coil
PH14-150	1-1/2	1.93	49.0	150	26	3.4	0.84	100' - Coil
PH14-200	2	2.47	62.8	150	26	5.0	1.10	100' - Coil
PH14-250	2-1/2	2.97	75.5	150	26	5.5	1.41	100' - Coil
PH14-300	3	3.51	89.2	150	26	8.0	1.72	100' - Coil
PH14-400	4	4.55	115.6	150	26	12.5	2.27	100' - Coil
PH14-600	6	6.70	168.4	150	26	24.0	4.77	100' - Coil

\* 1-1/2", 2" and 2-1/2" exceeds SAE 100R4 specifications



## PH15 Arctic Tank Truck

- Tube:** Black nitrile for maximum oil resistant
- Reinforcement:** A high tensile steel helix embedded between layers of textile cords
- Cover:** Blue synthetic elastomer compound, flat corrugated, abrasion, weather and ozone resistant
- Temperature:** -67°F to +176°F (-55°C to +80°C)
- Application:** Specially designed to remain flexible while handling a wide range of petroleum products, including diesel.
- Branding:** FORSAFLEX PH15-300 3" ARCTIC TANK TRUCK HOSE 150 PSI MAX WP

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
PH15-150	1-1/2	1.96	50.0	150	26	4.5	0.76	100' - Coil
PH15-200	2	2.52	64.0	150	26	6.0	1.00	100' - Coil
PH15-300	3	3.54	90.0	150	26	9.0	1.69	100' - Coil
PH15-400	4	4.65	118.0	150	26	12.0	2.63	100' - Coil



## PH16 Extra-Flex Arctic Tank Truck

- Tube:** Synthetic rubber
- Reinforcement:** High tensile synthetic textile, helix steel wire and antistatic copper wire reinforcement.
- Cover:** Synthetic rubber
- Temperature:** -67°F to +194°F (-55°C to +90°C)
- Application:** Suitable for use in suction & discharge of petroleum products with aromatic content up to 50%.
- Branding:** FORSAFLEX PH16-300 3" EXTRA-FLEX ARCTIC TANK HOSE 150 PSI MAX WP

Part #	ID	OD		Max WP	Vacuum	Min BR		Burst Pressure		Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	mm	psi	bar	lbs/ft	
PH16-200	2.01	2.50	63.5	150	26	2.0	51	450	30	0.89	100' - Coil
PH16-300	2.99	3.48	88.5	150	26	3.0	76	450	30	1.64	100' - Coil
PH16-400	4.00	4.57	116.0	150	26	4.0	102	450	30	2.60	100' - Coil





## PH19 HD Tank Truck Hose 300

- Tube:** Black synthetic rubber
- Reinforcement:** A high tensile steel helix embedded between layers of textile cords
- Cover:** Black, abrasion, oil resistant synthetic rubber
- Temperature:** -20°F to +180°F (-29°C to +82°C)
- Application:** High pressure suction and discharge hose suitable for bulk loading and unloading.
- Branding:** FORSAFLEX PH19-300 3" HD TANK TRUCK HOSE 300 PSI MAX WP

11

**WARNING!**



- Never exceed the maximum working pressure of the lowest rated component in the assembly.

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
PH19-200	2	2.59	65.8	300	27	6	1.55	100' - Coil
PH19-300	3	3.74	95.0	300	27	9	2.46	100' - Coil
PH19-400	4	4.92	125.0	300	27	13	4.25	100' - Coil
PH19-600	6	7.08	179.8	300	27	25	7.74	100' - Coil
PH19-800	8	9.40	238.8	300	27	35	13.80	20' - Length



## PH22 TPR Rubber Drop Hose (Infinity HD Type)

- Tube:** Black nitrile synthetic rubber (static dissipating)
- Reinforcement:** Synthetic fabric piles
- Cover:** Black nitrile rubber with double orange outer PVC helix
- Temperature:** -40°F to +160°F (-40°C to +71°C)
- Application:** Lightweight in construction and is suitable in gravity flow or medium suction at an ambient temperature. It is designed to transfer biodiesel and ethanol blends, gasoline and other petroleum products with an aromatic content of 60% or less.

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
PH22-300	3	3.80	96.5	150	23	6.0	1.48	100' - Coil
PH22-400	4	4.80	121.9	150	23	8.0	2.01	100' - Coil



## PH23 TPR Orange/Black Gravity Drop Hose

- Tube:** Thermoplastic rubber
- Reinforcement:** Synthetic fabric piles
- Temperature:** -30°F to +140°F (-22°C to +60°C)
- Application:** Revolutionary polyurethane compound! Specially designed to handle gasoline, ethanol (Meeting ASTM D5798, D4806 or D6751 criteria), diesel and biodiesel (Meeting ASTM D5798, D4806 or D6751 criteria) ... and still keeps all the other great features and benefits!

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
PH23-200	2	2.68	68.1	75	29	5.0	1.13	100' - Coil
PH23-300	3	3.68	93.5	65	29	6.0	1.37	100' - Coil
PH23-400	4	4.80	121.9	65	29	8.0	2.16	100' - Coil



## PH21 PU Clear Tank Drop Hose

- Tube:** Clear polyurethane
- Reinforcement:** Synthetic fiber
- Cover:** External PVC helix allows for easy dragging of hose
- Temperature:** -40°F to +140°F (-40°C to +60°C)
- Application:** Tank truck gravity drop and terminal fuel transfer hose specially designed to handle gasoline, ethanol (up to E98), diesel and biodiesel (up to B100 meeting ASTM D6751 criteria). This polyurethane construction won't swell or become stiff like conventional TPR/rubber hose. It is much lighter and more flexible than conventional TPR/rubber hose

11

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
PH21-300	3	3.78	96.0	70	28	6.0	1.20	100' - Coil
PH21-400	4	4.82	122.4	65	28	8.0	1.80	100' - Coil

Part #	Banding	ID	Length	Color	Weight
		in	ft		lbs/ft
BCCF3	Coil	3	1	Clear	0.60
BCCF4	Coil	4	1	Clear	0.90



## PH44 Vapor Recovery Hose

- Construction:** Polyurethane hose with PVC helix with embedded grounding wire.
- Temperature:** -40°F to +140°F (-40°C to +60°C)
- Application:** Tank truck and terminal vapor recovery.

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi @ 20°C / 70° F	in	lbs/ft	
PH44-200	2	2.43	61.7	17	3.0	0.51	100/60' - Coil
PH44-300	3	3.53	89.6	11	3.5	0.78	100/60' - Coil
PH44-400	4	4.56	115.8	9	4.5	1.10	100/60' - Coil

Part #	Banding	ID	Length	Color	Weight
		in	ft		lbs/ft
BCCF3	Coil	3	1	Clear	0.60
BCCF4	Coil	4	1	Clear	0.90

11



## PH25 Frac Hose

- Tube:** Black, heat and oil resistant synthetic rubber
- Reinforcement:** High strength synthetic fiber
- Cover:** Black, heat, oil, and weather resistant neoprene
- Temperature:** -25°F to +180°F (-32°C to +82°C)
- Application:** For handling a wide range of petroleum products, including gasoline, as well as a number of chemical solutions. Specifically designed for use in Frac service.
- Branding:** FORSAFLEX PH25-400 4" OILFIELD FRACTURING HOSE 400 PSI MAX WP

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
PH25-400	4	4.65	118.1	400	2.15	100' - Coil



## PH27 Hot Tar & Asphalt

- Tube:** Black synthetic resistant rubber
- Reinforcement:** A high tensile steel helix embedded between layers of textile cords
- Cover:** Black synthetic rubber, anti-static, high oil, heat, abrasion, and weather resistant
- Temperature:** -22°F to +356°F (-30°C to +180°C)
- Application:** For conveying hot tar and asphalt.
- Branding:** FORSAFLEX PH27-300 3" HOT TAR AND ASPHALT 150 PSI MAX WP

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
PH27-200	2	2.71	69.0	150	26	10.0	1.80	100' - Coil
PH27-300	3	3.78	96.0	150	26	15.0	2.95	100' - Coil
PH27-400	4	4.83	122.8	150	26	20.0	3.90	100' - Coil





## PH40 EagleFlo® Curb Pump Hose - UL 330

- Tube:** Type C (Nitrile), Black, RMA (Class A), High oil resistance
- Reinforcement:** Braided, high tensile steel wire
- Cover:** Type J (CPE), black
- Temperature:** -40°F to +120°F (-40°C to +49°C)
- Application:** Dispensing of all types of commercial gasolines, or other petroleum based products from service station pumps. A heavy duty hardwall hose which does not collapse in reel use or behind the nozzle in heavy duty service.
- Branding:** **us FORSAFLEX EAGLEFLO™ PH40-100 1" HARDWALL GASOLINE HOSE - FUEL HOSE 150 PSI MAX WP**

11

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
PH40-063	5/8	1.00	25.4	150	6.0	0.37	500' - Reel
PH40-075	3/4	1.13	28.7	150	5.0	0.42	500' - Reel
PH40-100	1	1.38	35.1	150	8.0	0.57	500' - Reel

**WARNING!**

- This hose is not for aircraft fueling.

## PH40 EagleFlo® Curb Pump Assemblies

Part #	Hose Size	Fitting A	Fitting B	Length	Attaching Method
				ft	
PH40-0075MMS10	3/4	Swivel	Rigid	10	Crimp
PH40-0075MMS12	3/4	Swivel	Rigid	12	Crimp
PH40-0075MMS15	3/4	Swivel	Rigid	15	Crimp
PH40-0075MMS20	3/4	Swivel	Rigid	20	Crimp
PH40-0075MMS25	3/4	Swivel	Rigid	25	Crimp
PH40-0075MMS50	3/4	Swivel	Rigid	50	Crimp
PH40-0100MMS10	1	Swivel	Rigid	10	Crimp
PH40-0100MMS12	1	Swivel	Rigid	12	Crimp
PH40-0100MMS15	1	Swivel	Rigid	15	Crimp
PH40-0100MMS20	1	Swivel	Rigid	20	Crimp
PH40-0100MMS25	1	Swivel	Rigid	25	Crimp
PH40-0100MMS50	1	Swivel	Rigid	50	Crimp



11



## PH42 Farm Tank Hose

- Tube:** Black nitrile
- Reinforcement:** Synthetic yarn and copper static wire
- Cover:** Black weather resistant synthetic rubber
- Temperature:** -30°F to +180°F (-35°C to +80°C)
- Application:** Dispensing diesel fuel and oil from gravity tanks and barrel pumps.  
**This hose is not UL approved.**
- Branding:** FORSAFLEX PH42-100 1" FARM TANK HOSE

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
PH42-075S	3/4	1.12	28.4	60	0.35	500' - Reel
PH42-100S	1	1.38	35.0	60	0.44	450' - Reel





## PH45 Wrapped Arctic Fuel Delivery Hose

- Tube:** Black nitrile
- Reinforcement:** Synthetic fiber with copper static wire
- Cover:** Blue abrasion and weather resistant rubber
- Temperature:** -67°F to +185°F (-55°C to +85°C)
- Application:** Maintains flexibility down to -55°C (-67°F) and can be used for gasoline, fuel oil, kerosene, water and air.  
This hose is not UL approved.
- Branding:** FORSAFLEX PH45-100 1" ARCTIC FUEL DELIVERY 300 PSI MAX WP

11

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
PH45-050	1/2	0.94	24.0	300	4.0	0.29	200' - Coil
PH45-075	3/4	1.20	32.0	300	6.0	0.40	200' - Coil
PH45-100	1	1.48	38.0	300	7.9	0.56	200' - Coil
PH45-125	1-1/4	1.77	45.0	300	10.0	0.69	200' - Coil
PH45-150	1-1/2	2.01	53.0	300	12.0	0.79	200' - Coil
PH45-200	2	2.52	66.0	300	16.0	1.04	200' - Coil

## PH45 Wrapped Arctic Fuel Delivery Hose Assemblies

Part #	Hose Size	Fitting A	Fitting B	Length	Attaching Method
				ft	
PH45-075MMS010-C	3/4	Swivel	Rigid	10	Crimp
PH45-075MMS012-C	3/4	Swivel	Rigid	12	Crimp
PH45-075MMS015-C	3/4	Swivel	Rigid	15	Crimp
PH45-075MMS020-C	3/4	Swivel	Rigid	20	Crimp
PH45-075MMS025-C	3/4	Swivel	Rigid	25	Crimp
PH45-075MMS050-C	3/4	Swivel	Rigid	50	Crimp
PH45-100MMS010-C	1	Swivel	Rigid	10	Crimp
PH45-100MMS012-C	1	Swivel	Rigid	12	Crimp
PH45-100MMS015-C	1	Swivel	Rigid	15	Crimp
PH45-100MMS020-C	1	Swivel	Rigid	20	Crimp
PH45-100MMS025-C	1	Swivel	Rigid	25	Crimp
PH45-100MMS050-C	1	Swivel	Rigid	50	Crimp



## PH46 Smooth Arctic Blue Fuel Delivery Hose

- Tube:** Black nitrile
- Reinforcement:** Synthetic fiber with copper static wire
- Cover:** Blue smooth abrasion and weather resistant rubber
- Temperature:** -40°F to +140°F (-40°C to +60°C)
- Application:** Delivery of fuel oil and petroleum products for home delivery, commercial and industrial service. Designed to remain flexible in cold temperatures and provide superior oil resistance. The braided construction reduces kinking and twisting when reeling. The smooth cover has low drag resistance.

11

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
PH46-125	1-1/4	1.80	45.7	250	0.65	125', 150', 200'
PH46-138	1-3/8	1.88	47.8	250	0.70	125', 150', 200'
PH46-150	1-1/2	2.10	53.3	250	0.92	125', 150', 200'

## PH46 Assemblies - Brass Ends

Part #	Hose Size	Fitting A	Fitting B	Length	Attaching Method
				ft	
PH46-125MF100	1-1/4	M-NPT	F-NPSM	100	Internal Expanded
PH46-125MF150	1-1/4	M-NPT	F-NPSM	150	Internal Expanded
PH46-125MF175	1-1/4	M-NPT	F-NPSM	175	Internal Expanded
PH46-138MF100	1-3/8	M-NPT	F-NPSM	100	Internal Expanded
PH46-138MF150	1-3/8	M-NPT	F-NPSM	150	Internal Expanded
PH46-138MF175	1-3/8	M-NPT	F-NPSM	175	Internal Expanded
PH46-150MF100	1-1/2	M-NPT	F-NPSM	100	Internal Expanded
PH46-150MF150	1-1/2	M-NPT	F-NPSM	150	Internal Expanded
PH46-150MF175	1-1/2	M-NPT	F-NPSM	175	Internal Expanded

Part #	Hose Size	Fitting A	Fitting B	Length	Attaching Method
				ft	
PH46-125MM100	1-1/4	M-NPT	M-NPT	100	Internal Expanded
PH46-125MM150	1-1/4	M-NPT	M-NPT	150	Internal Expanded
PH46-125MM175	1-1/4	M-NPT	M-NPT	175	Internal Expanded
PH46-138MM100	1-3/8	M-NPT	M-NPT	100	Internal Expanded
PH46-138MM150	1-3/8	M-NPT	M-NPT	150	Internal Expanded
PH46-138MM175	1-3/8	M-NPT	M-NPT	175	Internal Expanded
PH46-150MM100	1-1/2	M-NPT	M-NPT	100	Internal Expanded
PH46-150MM150	1-1/2	M-NPT	M-NPT	150	Internal Expanded
PH46-150MM175	1-1/2	M-NPT	M-NPT	175	Internal Expanded





## PH48 Smooth Red Fuel Delivery Hose

- Tube:** Black nitrile
- Reinforcement:** Synthetic fiber with copper static wire
- Cover:** Red smooth abrasion and weather resistant rubber
- Temperature:** -40°F to +140°F (-40°C to +60°C)
- Application:** Delivery of fuel oil and petroleum products for home delivery, commercial and industrial service. Red fuel oil has two textile braids. The braided construction reduces kinking and twisting when reeling. The smooth cover has low drag resistance.

11

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
PH48-100	1	1.50	38.1	250	0.57	125', 150', 200'
PH48-125	1-1/4	1.80	45.7	250	0.65	125', 150', 200'
PH48-138	1-3/8	1.88	47.8	250	0.70	125', 150', 200'
PH48-150	1-1/2	2.10	53.3	250	0.92	125', 150', 200'

## PH48 Assemblies - Brass Ends

Part #	Hose Size	Fitting A	Fitting B	Length	Attaching Method
				ft	
PH48-125MF125	1-1/4	M-NPT	F-NPSM	125	Internal Expanded
PH48-125MF150	1-1/4	M-NPT	F-NPSM	150	Internal Expanded
PH48-138MF125	1-3/8	M-NPT	F-NPSM	125	Internal Expanded
PH48-138MF150	1-3/8	M-NPT	F-NPSM	150	Internal Expanded
PH48-150MF125	1-1/2	M-NPT	F-NPSM	125	Internal Expanded
PH48-150MF150	1-1/2	M-NPT	F-NPSM	150	Internal Expanded

Part #	Hose Size	Fitting A	Fitting B	Length	Attaching Method
				ft	
PH48-125MM125	1-1/4	M-NPT	M-NPT	125	Internal Expanded
PH48-125MM150	1-1/4	M-NPT	M-NPT	150	Internal Expanded
PH48-138MM125	1-3/8	M-NPT	M-NPT	125	Internal Expanded
PH48-138MM150	1-3/8	M-NPT	M-NPT	150	Internal Expanded
PH48-150MM125	1-1/2	M-NPT	M-NPT	125	Internal Expanded
PH48-150MM150	1-1/2	M-NPT	M-NPT	150	Internal Expanded



## PH50 Arctic Fuel Delivery Hose - UL 330

- Tube:** Black nitrile
- Reinforcement:** Steel braid
- Cover:** Black smooth and weather resistant rubber
- Temperature:** -67°F to +185°F (-55°C to +85°C)
- Application:** Maintains flexibility down to -67°F (-55°C) and can be used for gasoline, fuel oil, kerosene, water and air. PH50 is good for all ethanol fuel 0% to 100% and for biodiesel below 30%. This hose is designed for fueling off- road construction, forestry, mining, and agricultural equipment.  
**This hose meets UL 330. Must use factory crimp UL fittings only.**
- Branding:** FORSAFLEX PH50-100 1" ARCTIC GASOLINE - FUEL HOSE 250 PSI MAX WP

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
PH50-075	3/4	1.20	32.0	250	5.0	0.40	250' - Coil
PH50-100	1	1.48	38.0	250	6.0	0.56	200' - Coil

**WARNING!**



- This hose is not for aircraft fueling.

## PH50 Assemblies - UL - Brass Ends

Part #	Hose Size	Fitting A	Fitting B	Length	Attaching Method
				ft	
PH50-075MMS010-C	3/4	Swivel	Rigid	10	Crimp
PH50-075MMS012-C	3/4	Swivel	Rigid	12	Crimp
PH50-075MMS015-C	3/4	Swivel	Rigid	15	Crimp
PH50-075MMS020-C	3/4	Swivel	Rigid	20	Crimp
PH50-075MMS025-C	3/4	Swivel	Rigid	25	Crimp
PH50-075MMS050-C	3/4	Swivel	Rigid	50	Crimp
PH50-100MMS010-C	1	Swivel	Rigid	10	Crimp
PH50-100MMS012-C	1	Swivel	Rigid	12	Crimp
PH50-100MMS015-C	1	Swivel	Rigid	15	Crimp
PH50-100MMS020-C	1	Swivel	Rigid	20	Crimp
PH50-100MMS025-C	1	Swivel	Rigid	25	Crimp
PH50-100MMS050-C	1	Swivel	Rigid	50	Crimp

\*See brass fittings.





## PH60 Oil Service S&D Cargo Hose - Built In Flanges

- Tube:** Oil and fuel resistant conductive nitrile (NBR)
- Reinforcement:** Multiple high tensile synthetic polyester cords with steel wire helix
- Cover:** Black weather resistant synthetic rubber
- Temperature:** -40°F to +194°F (-40°C to +90°C)
- Application:** Designed for oil/water suction and delivery service. All Forsaflex OS&D hose assemblies are hydrotested at 1.5 times working pressure. Tested following U.S.C.G. certification standards.
- Branding:** FORSAFLEX PH60-800 8" OIL SERVICE S&D CARGO HOSE 250 PSI MAX WP

11

Part #	ID	OD		Max WP	Min BR	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
PH60-400-010	4	10	5.50	139.7	300	19	100
PH60-400-020	4	20	5.50	139.7	300	19	175
PH60-600-010	6	10	6.50	165.1	300	29	183
PH60-600-010	6	20	6.50	165.1	300	29	265
PH60-800-010	8	10	9.50	241.3	300	38	214
PH60-800-020	8	20	9.50	241.3	300	38	368
PH60-1000-010	10	10	11.50	292.1	300	48	342
PH60-1000-020	10	20	11.50	292.1	300	48	540
PH60-1200-010	12	10	13.75	349.3	300	48	503
PH60-1200-020	12	20	13.75	349.3	300	48	732
PH60-1400-010	14	10	15.75	400.1	300	68	573
PH60-1400-020	14	20	15.75	400.1	300	68	845
PH60-1600-010	16	10	17.75	450.9	300	78	765
PH60-1600-020	16	20	17.75	450.9	300	78	1,130
PH60-1800-010	18	10	20.00	508.0	300	106	946
PH60-1800-020	18	20	20.00	508.0	300	106	1,408

\*Built with 150lb carbon steel fixed x floating flanges.

## PH70 Eagle Flight® Aircraft Fueling Hose

- Tube:** Black nitrile
- Reinforcement:** High tensile textile braids
- Cover:** Black conductive CR - abrasion, ozone and hydrocarbon resistant
- Temperature:** -22°F to +150°F (-30°C to +66°C)
- Application:** Aircraft ground fueling.
- Branding:** EAGLE FLIGHT® AIRCRAFT FUELING HOSE EI 1529/2014 Type C, Grade 2, NFP A407, BSEM ISO 1825/2018, 2068 KPA (300 PSI) MAX WP

11

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
PH70-100	1	1.46	37.1	300	5.91	0.52
PH70-125	1-1/4	1.73	43.9	300	7.48	0.62
PH70-150	1-1/2	2.01	51.1	300	8.86	0.80
PH70-200	2	2.60	66.0	300	10.83	1.22
PH70-250	2-1/2	3.11	79.0	300	11.81	1.40
PH70-300	3	3.58	90.9	300	11.81	1.69
PH70-400	4	4.57	116.1	300	17.72	2.48

\* Use Only API Compliant Components.





## BOP 5,000 PSI Four Wire

- Tube:** Polychloroprene
- Reinforcement:** (6) High-Tensile Steel Spiral
- Cover:** Polychloroprene
- Temperature:** -40°F to 212°F (-40°C to 100°C)
- Application:** 3/8" - 1" Blow Out Preventer hose is used for hydraulic connection between the well control equipment and the control system.

Part #	ID	OD	Max WP	Bend Radius	Weight	Standard Pack
	in	in	psi	in	lbs/ft	
BOP5-06	3/8	1.14	5,000	7.10	0.8	250' - Reel
BOP5-08	1/2	1.24	5,000	9.0	0.9	250' - Reel
BOP5-12	3/4	1.58	5,000	11.8	1.6	400' - Reel
BOP5-16	1	1.85	5,000	13.4	2.0	300' - Reel



BOP - Ferrule	
Part #	Hose ID
BOP510-06	3/8"
BOP510-08	1/2"
BOP510-12	3/4"
BOP510-16	1"



BOP - Guard	
Part #	Hose ID
BOPTPG-08	1/2"
BOPTPG-12	1/2" & 3/4"
BOPTPG-16	1"



BOP - Male NPT		
Part #	Hose ID	Thread
BOP06-06MP	3/8"	3/8" M-NPT
BOP08-08MP	1/2"	1/2" M-NPT
BOP12-12MP	3/4"	3/4" M-NPT
BOP16-16MP	1"	1" M-NPT



BOP - Female NPT		
Part #	Hose ID	Thread
BOP06-06FJ	3/8"	-6 FJIC
BOP08-08FJ	1/2"	-8 FJIC
BOP12-12FJ	3/4"	-12 FJIC
BOP16-16FJ	1"	-16 FJIC



## LP10 CSA/UL Type 1 Propane - NG

Propane hose is designed to transfer liquified propane. It meets Canadian Gas Association as well as CAN/CGA- 8.1-M86 Type 1 requirements. This hose is supplied in premade, factory tested assemblies only and conforms to CSA requirements. LP10 can also be used for natural gas in an outdoor, open, and ventilated area.

- Tube:** Nitrile rubber designed for low permeation
- Reinforcement:** Synthetic fiber
- Cover:** Black, oil, abrasion, and flame resistant rubber
- Temperature:** -40°F to 140°F (-40°C to 60°C)

**\* Factory Made Assemblies Only\***

ID	Part #	OD	Max WP	Weight
in		in	psi	lbs/ft
1/4	LP10-025	0.53	350	0.09
3/8	LP10-038	0.71	350	0.16
1/2	LP10-050	0.84	350	0.30
3/4	LP10-075	1.19	350	0.43
1	LP10-100	1.46	350	0.58

11

### BRASS ENDS

ID in	Old Part #	New Part #	Length	Fittings
			ft	
1/4"	LP10B-04LH120	LP10B-04LH0120	10	Left hand 9/16 - 18
1/4"	LP10B-04LH180	LP10B-04LH0180	15	Left hand 9/16 - 18
1/4"	LP10B-04LH240	LP10B-04LH0240	20	Left hand 9/16 - 18
1/4"	LP10B-04LH300	LP10B-04LH0300	25	Left hand 9/16 - 18
1/4"	LP10B-04MP120	LP10B-04MP0120	10	NPT Male
1/4"	LP10B-04MP180	LP10B-04MP0180	15	NPT Male
1/4"	LP10B-04MP240	LP10B-04MP0240	20	NPT Male
1/4"	LP10B-04MP300	LP10B-04MP0300	25	NPT Male
1/4"	LP10B-04MP600	LP10B-04MP0600	50	NPT Male
1/4"	LP10B-04PLMP036	LP10B-04PLMP0036	3	POL x NPT Male
1/4"	LP10B-04PLMP060	LP10B-04PLMP0060	5	POL x NPT Male
1/4"	LP10B-04PLMP120	LP10B-04PLMP0120	10	POL x NPT Male
3/8"	LP10B-06FS120	LP10B-06FS0120	10	SAE Female
3/8"	LP10B-06FS180	LP10B-06FS0180	15	SAE Female
3/8"	LP10B-06FS300	LP10B-06FS0300	25	SAE Female
3/8"	LP10B-06FS600	LP10B-06FS0600	50	SAE Female
3/8"	LP10B-06FSMP120	LP10B-06FSMP0120	10	SAE Female x NPT Male
3/8"	LP10B-06FSMP144	LP10B-06FSMP0144	12	SAE Female x NPT Male
3/8"	LP10B-06FSMP180	LP10B-06FSMP0180	15	SAE Female x NPT Male
3/8"	LP10B-06FSMP240	LP10B-06FSMP0240	20	SAE Female x NPT Male
3/8"	LP10B-06FSMP300	LP10B-06FSMP0300	25	SAE Female x NPT Male

### STEEL ENDS

ID in	Old Part #	New Part #	Length	Fittings
			ft	
1/2"	LP10S-08FJ024	LP10S-08FJ0024	2	JIC Female
1/2"	LP10S-08FJ300	LP10S-08FJ0300	25	JIC Female
1/2"	LP10S-08FJ600	LP10S-08FJ0600	50	JIC Female
1/2"	LP10S-08FJ900	LP10S-08FJ0900	75	JIC Female
1/2"	LP10S-08FJ1200	LP10S-08FJ1200	100	JIC Female
3/4"	LP10S-12FJ300	LP10S-12FJ0300	25	JIC Female
3/4"	LP10S-12FJ600	LP10S-12FJ0600	50	JIC Female
3/4"	LP10S-12FJ900	LP10S-12FJ0900	75	JIC Female
3/4"	LP10S-12FJ1200	LP10S-12FJ1200	100	JIC Female
3/4"	LP10S-12FS300	LP10S-12FJ0300	25	SAE Female
3/4"	LP10S-12FS600	LP10S-12FJ0600	50	SAE Female
3/4"	LP10S-12FS900	LP10S-12FJ0900	75	SAE Female
3/4"	LP10S-12FS1200	LP10S-12FS1200	100	SAE Female
3/4"	LP10S- 12MP300	LP10S- 12MP0300	25	NPT Male
3/4"	LP10S- 12MP600	LP10S- 12MP0600	50	NPT Male
3/4"	LP10S- 12MP900	LP10S- 12MP0900	75	NPT Male
3/4"	LP10S- 12MP1200	LP10S- 12MP1200	100	NPT Male
1"	LP10S-16FJ300	LP10S-16FJ0300	25	JIC Female
1"	LP10S-16FJ600	LP10S-16FJ0600	50	JIC Female
1"	LP10S-16FJ900	LP10S-16FJ0900	75	JIC Female
1"	LP10S-16FJ1200	LP10S-16FJ1200	100	JIC Female
1"	LP10S-16MP300	LP10S-16MP0300	25	NPT Male
1"	LP10S-16MP600	LP10S-16MP0600	50	NPT Male
1"	LP10S-16MP900	LP10S-16MP0900	75	NPT Male
1"	LP10S-16MP1200	LP10S-16MP1200	100	NPT Male

CODE	
FSAE	FS
FJIC	FJ
MNPT	MP
POL	PL
Left Hand 9/16"	LH

\* Other lengths and fitting combinations available on request.





## LP15/LP20 CSA/UL Propane - NG

Propane hose is designed to transfer liquified propane. It meets Canadian Gas Association as well as CAN/CGA- 8.1-M86 Type 1 requirements. This hose is supplied in premade, factory tested assemblies only and conforms to CSA requirements. LP15 and LP20 can also be used for natural gas in an outdoor, open, and ventilated area.

- Tube:** Nitrile rubber designed for low permeation
- Reinforcement:** Synthetic fiber
- Cover:** Black, oil, abrasion, and flame resistant rubber
- Temperature:** -40°F to 180°F (-40°C to 82°C)

\* Factory Made Assemblies Only\*

ID	Part #	OD	Max WP	Weight
in		in	psi	lbs/ft
1/2	LP15-050	0.93	350	0.25
3/4	LP15-075	1.23	350	0.38
1	LP15-100	1.49	350	0.51
1-1/4	LP15-125	1.80	350	0.67
1-1/2	LP15-150	2.04	350	0.78

11

STEEL ENDS				
ID	Old Part #	New Part #	Length	Fittings
in			ft	
1/2"	LP15S-08FJ024	LP15S-08FJ0024	2	JIC Female
1/2"	LP15S-08FJ300	LP15S-08FJ0300	25	JIC Female
1/2"	LP15S-08FJ600	LP15S-08FJ0600	50	JIC Female
1/2"	LP15S-08FJ900	LP15S-08FJ0900	75	JIC Female
1/2"	LP15S-08FJ1200	LP15S-08FJ1200	100	JIC Female
3/4"	LP15S-12FJ300	LP15S-12FJ0300	25	JIC Female
3/4"	LP15S-12FJ600	LP15S-12FJ0600	50	JIC Female
3/4"	LP15S-12FJ900	LP15S-12FJ0900	75	JIC Female
3/4"	LP15S-12FJ1200	LP15S-12FJ1200	100	JIC Female
3/4"	LP15S-12FS300	LP15S-12FS0300	25	SAE Female
3/4"	LP15S-12FS600	LP15S-12FS0600	50	SAE Female
3/4"	LP15S-12FS900	LP15S-12FS0900	75	SAE Female
3/4"	LP15S-12FS1200	LP15S-12FS1200	100	SAE Female
3/4"	LP15S-12MP300	LP15S-12MP0300	25	NPT Male
3/4"	LP15S-12MP600	LP15S-12MP0600	50	NPT Male
3/4"	LP15S-12MP900	LP15S-12MP0900	75	NPT Male
3/4"	LP15S-12MP1200	LP15S-12MP1200	100	NPT Male
1"	LP15S-16FJ300	LP15S-16FJ0300	25	JIC Female
1"	LP15S-16FJ600	LP15S-16FJ0600	50	JIC Female
1"	LP15S-16FJ900	LP15S-16FJ0900	75	JIC Female
1"	LP15S-16FJ1200	LP15S-16FJ1200	100	JIC Female
1"	LP15S-16MP300	LP15S-16MP0300	25	NPT Male
1"	LP15S-16MP600	LP15S-16MP0600	50	NPT Male
1"	LP15S-16MP900	LP15S-16MP0900	75	NPT Male
1"	LP15S-16MP1200	LP15S-16MP1200	100	NPT Male
1 1/4"	LP15S-20MP240	LP15S-20MP0240	20	NPT Male
1 1/4"	LP15S-20MP300	LP15S-20MP0300	25	NPT Male
1 1/4"	LP15S-20MP480	LP15S-20MP0480	40	NPT Male

STEEL ENDS				
ID	Old Part #	New Part #	Length	Fittings
in			ft	
1/2"	LP15S-08FJ024	LP15S-08FJ0024	2	JIC Female
1/2"	LP15S-08FJ300	LP15S-08FJ0300	25	JIC Female
1/2"	LP15S-08FJ600	LP15S-08FJ0600	50	JIC Female
1/2"	LP15S-08FJ900	LP15S-08FJ0900	75	JIC Female
1/2"	LP15S-08FJ1200	LP15S-08FJ1200	100	JIC Female
3/4"	LP15S-12FJ300	LP15S-12FJ0300	25	JIC Female
3/4"	LP15S-12FJ600	LP15S-12FJ0600	50	JIC Female
3/4"	LP15S-12FJ900	LP15S-12FJ0900	75	JIC Female
3/4"	LP15S-12FJ1200	LP15S-12FJ1200	100	JIC Female
3/4"	LP15S-12FS300	LP15S-12FS0300	25	SAE Female
3/4"	LP15S-12FS600	LP15S-12FS0600	50	SAE Female
3/4"	LP15S-12FS900	LP15S-12FS0900	75	SAE Female

\* Other lengths and fitting combinations available on request.

CODE	
FSAE	FS
FJIC	FJ
MNPT	MP

CODE	
POL	PL
Left Hand 9/16"	LH





## LP30 CSA/UL Type III Propane - NG Hose

CSA approved to CGA Type III hose assemblies and tested/tagged in factory. Type III assemblies are approved for liquid propane and Natural Gas vapor and meets the requirements of CAN/CGA 8.1-M86

**Tube:** Nylon  
**Reinforcement:** Steel Braid  
**Cover:** NBR  
**Temperature:** -40°F to 140°F (-40°C to 60°C)

Part #	ID	OD	Max WP
	in	in	psi
LP30-06	5/16	0.70	350

\* Factory Made Assemblies Only\*

## EPJETSOX Heater Duct



CSA approved to CGA Type III hose assemblies and tested/tagged in factory. Type III assemblies are approved for liquid propane and Natural Gas vapor and meets the requirements of CAN/CGA 8.1-M86

Part #	Hose Size X Length	Standard Pack
EPJETSOX-12N-12-DE	12" x 12'	12"x12' JETSOX M/F PINLOCK -STORAGE STRAP
EPJETFLEXLT-12N-25-DE	12" x 25'	12"x25' JETFLEXLT M/F PINLOCK -STORAGE STRAP
EPJETSOX-16N-25-DE	16" x 25'	16"x25' JETFLEXLT M/F PINLOCK -STORAGE STRAP
EPJETSOX-20N-25-DE	20" x 25'	20"x25' JETFLEXLT M/F PINLOCK -STORAGE STRAP

## CSA Propane Quick Disconnects



Size	Part #	Part #	Part #	Part #
3/8"	QPC66FP	QPN66FP	QP6DC	QP6DP
1/2"	QPC88FP	QPN88FP	QP8DC	QP8DP
3/4"	QPC1212FP	QPN1212FP	QP12DC	QP12DP
1"	QPC1616FP	QPN1616FP	QP16DC	QP16DP

## E60 Propane Regulator



Part #	Inlet Size	Outlet Size	BTU Rating
EP60X60	1/4" F-NPT	3/8" F-NPT	140,000



## HN Compact 100R4 Suction / Return Hose

- Tube:** Seamless, black, oil and heat resistant synthetic rubber
- Reinforcement:** Textile braided with spiral wire to prevent collapsing
- Cover:** Black synthetic oil and heat resistant rubber, MSHA approved
- Temperature:** -40°F to +212°F (-40°C to +100°C)
- Application:** Hose meets or exceeds the requirement of SAE 100R4. An extremely flexible high pressure suction and return hose designed to handle petroleum & water based hydraulic fluids. It is specially designed for minimal force to bend and superior kink resistance.
- Branding:** FORSAFLEX HN-20 1-1/4" EXCEEDS SAE 100R4 SUCTION HOSE 200 PSI

HN hose can be crimped. Consult factory for details.

Part #	ID	OD		Max WP	Vacuum	Min BR		Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	mm	lbs/ft	
HN-12	3/4	1.14	29.0	300	27	1.61	41.0	0.40	100' - coil
HN-16	1	1.38	35.0	250	27	1.81	46.0	0.50	100' - coil
HN-20	1-1/4	1.65	42.0	200	27	2.40	61.0	0.60	100' - coil
HN-24	1-1/2	1.93	49.0	150	27	2.60	66.0	0.75	100' - coil
HN-32	2	2.44	62.0	150	27	6.30	160.0	0.90	100' - coil
HN-40	2-1/2	2.97	75.5	150	27	9.80	249.0	1.20	100' - coil
HN-48	3	3.46	88.0	150	27	11.81	300.0	1.60	100' - coil
HN-56	3-1/2	4.02	102.1	150	27	14.00	356.0	1.90	100' - coil



## FE10 Fire Engine Draftflex™

**Tube:** Cold weather PVC

**Reinforcement:** Rigid PVC helix

**Temperature:** -22°F to +140°F (-20°C to +70°C)

**Application:** Designed for suction side drafting, dry hydrant connections, trash pumps in construction and mining, solid material transfer drafting from lakes, ponds, rivers, pools, wells, etc. during structural firefighting operations.

12

Part #	ID	OD		Max WP	Vacuum	Min BR	Weight	Standard Pack
	in	in	mm	psi	in/Hg	in	lbs/ft	
FE10-300	3	3.50	89	25	29	5.0	1.00	100' - Coil
FE10-400	4	4.55	116	20	28	6.5	1.52	100' - Coil
FE10-500	5	5.73	145	20	28	9.5	2.50	100' - Coil
FE10-600	6	6.73	171	20	28	10.6	3.10	10', 100' - Coil



FEMALE NH & MALE COUPLINGS	
Part #	Size
DFMN-300	3
DFMN-400	4
DFMN-500	5
DFMN-600	6



STORZ COUPLINGS	
Part #	Size
DST-300	3
DST-400	4
DST-500	5
DST-600	6



## FE20 Fire Engine Booster

**Tube:** Synthetic rubber

**Reinforcement:** Two braids of synthetic fiber

**Cover:** Red synthetic rubber

**Temperature:** -0°F to +180°F (-18°C to 82°C)

**Application:** For use in high pressure fire engine booster services. It also has many applications in other heavy duty industrial and municipal operations.

Part #	ID	OD		Max WP	Bend Radius	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
FE20-075	3/4	1.25	31.8	800	???	0.42	500' - reel
FE20-100	1	1.53	38.9	800	???	0.57	450' - reel



## WD35 Forestry Hose Assemblies - Universal Forestry Ends

Part #	Hose Size	Max WP	Fitting A	Fitting B	Length	Attaching Method
		psi			ft	
WD35-150FC050	1-1/2	250	Forestry	Forestry	50	Expanded
WD35-150FC100	1-1/2	250	Forestry	Forestry	100	Expanded

*Other lengths and fitting combinations are available.*



## AH80 Mine Spray Hose 1000

- Tube:** Synthetic oil mist resistant
- Reinforcement:** Steel wire
- Cover:** Yellow cut and abrasion resistant rubber, MSHA
- Temperature:** -22°F to +212°F (-30°C to 100°C)
- Application:** Designed for heavy duty service requirements of underground mine spray applications, excellent choice for high pressure air applications in construction and quarries
- Vacuum:** Not recommended
- Safety Factor:** 4:1
- Branding:** FORSAFLEX AH80-200 2" MINE SPRAY HOSE 1000 PSI MAX WP

Temperature		Max WP (psi)
21°C	70°F	1000
32°C	90°F	910
66°C	150°F	640
93°C	200°F	420

Part #	ID	OD		Max WP	Bend Radius	Weight	Standard Pack
	in	in	mm	psi	in	lbs/ft	
AH80-075	3/4	1.04	26.4	1000	6.0	0.35	100' - coil
AH80-100	1	1.33	33.8	1000	8.0	0.50	100' - coil
AH80-125	1 1/4	1.63	41.4	1000	10.0	0.71	100' - coil
AH80-150	1 1/2	1.88	47.8	1000	11.0	0.91	100' - coil
AH80-200	2	2.43	61.7	1000	16.0	1.14	100' - coil



## SH10 EPDM Steam Hose - Bolt Clamps

- Tube:** Black smooth EPDM
- Reinforcement:** Steel wire braids
- Cover:** Red EPDM wrapped finish
- Temperature:** -40°F to +410°F (-40°C to +210°C) / saturated steam
- Application:** Designed to convey saturated steam and hot water
- Branding:** SH10-100 1" EPDM STEAM HOSE 250 PSI MAX WP 210°C (410°F) - DRAIN AFTER USE

13

**WARNING!**



- Super heated steam considerably shortens the service life of the hose.

Part #	Cover	ID			OD		Max WP psi	Min BR in	Weight lbs/ft	Standard Pack
		in	in	mm	in	mm				
SH10R-0075	Red	3/4	1.25	31.0	250	4.4	0.44	50-100' Coils		
SH10R-0100	Red	1	1.50	38.0	250	6.7	0.77	50-100' Coils		
SH10R-0200	Red	2	2.64	67.0	250	11.8	1.44	50-100' Coils		



## SH15 EPDM Steam Hose - Crimp Fittings

- Tube:** Black smooth EPDM
- Reinforcement:** Steel wire braids
- Cover:** Red/Black EPDM wrapped finish
- Temperature:** -40°F to +450°F (-40°C to +232°C) / saturated steam
- Application:** Designed to convey saturated steam and hot water

**WARNING!**



- Super heated steam considerably shortens the service life of the hose.

Part #	Cover	ID			OD		Max WP psi	Min BR in	Weight lbs/ft	Standard Pack
		in	in	mm	in	mm				
SH15R-075	Red	3/4	1.78	32.5	250	4.4	0.56	50-100' Coils		
SH15R-100	Red	1	1.63	41.4	250	6.7	0.91	50-100' Coils		
SH15B-075	Black	3/4	1.78	32.5	250	4.4	0.56	50-100' Coils		
SH15B-100	Black	1	1.63	41.4	250	6.7	0.91	50-100' Coils		



MALE NPTF - CRIMP	
Part #	Size
IMS-3V	3/4"
IMS-4V	1"



FEMALE GROUND JOINT - CRIMP	
Part #	Size
RGJS-3V	3/4"
RGJS-4V	1"

## STEAM HOSE SAFETY RECOMMENDATIONS

Handling steam is a very hazardous situation. Using care and some safety precautions can minimize or eliminate personal or property damage.

### Selecting and Using Steam Hose

1. Make sure steam hose is identified as a steam hose. It should be branded as such, stating working pressure and temperature rating.
2. Make sure working pressure and temperature is not exceeded.
3. Do not allow hose to remain under pressure when not in use.
4. Avoid excessive bending or flexing of hose near the coupling. Straight line operation is preferred. If bends are necessary as part of operation, spring guards may help.
5. Be sure and use recommended steam hose couplings and clamps on hose.

### Maintenance of Steam Hose

1. Periodic inspection of hose should include looking for cover blisters and lumps.
2. Check for kinked areas that could damage hose.
3. Drain hose after each use to avoid tube damage before hose is put back in operation, to avoid "popcorning" of the tube.
4. Check tightness of clamps and bolts after each use.
5. Check to see if clamp halves are touching. If they are, recouple hose with smaller clamps to ensure proper tightness or grip around hose.
6. Do not store hose over hooks.
7. Steam hose laying on metal racks or installed around steel piping will dry out the hose, causing tube and cover cracking.

### Corrosive Hose

When the water used to generate steam contains dissolved air, oxygen, or carbon dioxide, then these gases end up as contaminants in the steam. At high temperatures of steam, both oxygen and carbon dioxide are extremely corrosive.

Carbon dioxide is acidic and therefore attacks metals, whereas the oxygen corrodes metals and oxidizes rubbers. Corrosion of metals in the presence of both oxygen and acids is forty times faster than with either alone. Boiler water is therefore normally treated not only to remove the "hardness," which could cause "furring" of the boiler, but also to remove dissolved oxygen and carbon dioxide and to ensure that the steam is not only non-acidic, but even slightly alkaline.

Boiler water treatment is a specialized subject beyond the scope of this technical sheet, but correct steam generation is important.

### Deterioration of Steam Hose

Like all rubber products steam hoses have a finite life and are subject to gradual deterioration with use. However, it sometimes happens that hoses which have been giving a good life suddenly start failing without apparent reason. In such cases, it is often a change in the steam conditions causing a rapid acceleration of a normal failure mode. It is therefore useful to consider how steam hoses normally last and thus how the condition affects hose life.


Reprinted from ARPM-11-1 Steam Hose.

### SELECTING AND USING STEAM HOSE

Gauge PSI	Pressure Bar	Temperature	
		°F	°C
25	1.23	267	130
30	2.07	274	134
35	2.42	281	138
40	2.76	287	141
45	3.11	292	144
50	3.45	298	148
60	4.14	307	153
70	4.83	316	158
80	5.52	324	162
90	6.21	330	166
100	6.90	338	170
120	8.28	350	177
140	9.66	351	182
160	11.04	371	188
180	12.42	379	193
200	13.80	388	198
225	15.53	397	203
250	17.25	406	208
275	18.98	414	212
300	20.70	422	216
325	22.43	429	221
350	24.15	437	225

The chart represents the three forms of water when subjected to heat and pressure. Use only hoses designed for the application.

Gauge Pressure PSI	Temperature of Saturated Steam
	°F
10	239
25	267
50	298
75	320
100	338
125	353
150	366
175	377
200	388
225	397
250	406

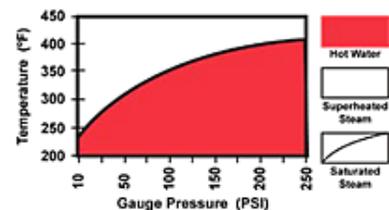

## PGH The Perfect Garden Hose®



- Tube:** Clear TPE
- Reinforcement:** Polypropylene 2 Helix Design, Color Blue 2 ply spiral polyester fiber
- Cover:** TPE with color Blue/Green
- Temperature:** -20°F to +158°F (-29°C to +70°C)
- Weight:** 0.13 lbs/ft

14

The Perfect Garden Hose’s unique double helix construction makes this a very flexible and only “un-kinkable” garden hose. The Perfect Garden Hose is 35%-50% lighter than the average garden hose and maintains flexibility in cold temperatures. It is assembled with heavy duty brass fittings. All of these features make The Perfect Garden Hose ideal for residential and light commercial users. PGH hose is suited for washing cars, RVs, or boats and also wash-down use in industrial plants, horse barns, and landscape applications.

## PGH Hose Assemblies

Part #	Color	Hose Size	Max WP	Fitting A	Fitting B	Length	Attaching Method
			psi @ 70°F/ 20°C			ft	
PGH-025-BL	Blue	5/8	100	M-GHT	F-GHT	25	Crimp
PGH-050-BL	Blue	5/8	100	M-GHT	F-GHT	50	Crimp
PGH-100-BL	Blue	5/8	100	M-GHT	F-GHT	100	Crimp
PGH-050-GN	Green	5/8	100	M-GHT	F-GHT	50	Crimp
PGH-100-GN	Green	5/8	100	M-GHT	F-GHT	100	Crimp
PGH-050-RD	Red	5/8	100	M-GHT	F-GHT	50	Crimp

14



## GH10 Golf Course Hose

- Tube:** Black PVC
- Reinforcement:** Synthetic fiber
- Cover:** Smooth transparent green PVC compound
- Temperature:** +25°F to +150°F (-4°C to +65°C)
- Application:** An all-purpose heavy duty PVC hose that is ideal for golf courses and parks

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
GH10-075	3/4	1.03	26.0	125	0.22	300' - Coil
GH10-100	1	1.30	32.9	125	0.30	50/100' - Coil

## GH10 Assemblies



GHT M x F



NPSM M x F

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
GH10-075GHT050	3/4	M-GHT	F-GHT	50	Crimp
GH10-075GHT100	3/4	M-GHT	F-GHT	100	Crimp
GH10-100GHT050	1	M-NPSM	F-NPSM	50	Crimp
GH10-100GHT100	1	M-NPSM	F-NPSM	100	Crimp

*Other lengths and fitting combinations are available.*





## WD10 Blue PVC Layflat

- Tube:** Blue PVC
- Reinforcement:** Synthetic fiber
- Cover:** Blue PVC
- Temperature:** 15°F to +130°F (-10°C to +55°C)
- Application:** A light duty layflat hose for portable pump and irrigation use.

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
WD10-100	1	1.11	28.1	100	0.11	300' - Coil
WD10-125	1-1/4	1.36	34.5	85	0.12	300' - Coil
WD10-150	1-1/2	1.61	40.9	70	0.14	300' - Coil
WD10-200	2	2.11	53.6	65	0.20	300' - Coil
WD10-250	2-1/2	2.62	66.5	60	0.27	300' - Coil
WD10-300	3	3.13	79.5	60	0.34	300' - Coil
WD10-400	4	4.13	104.9	60	0.48	300' - Coil
WD10-600	6	6.14	155.9	40	0.77	300' - Coil
WD10-800	8	8.15	207.0	35	1.21	300' - Coil
WD10-1000	10	10.12	257.0	35	1.81	100' - Coil
WD10-1200	12	12.13	308.1	30	1.95	100' - Coil

## WD10 Assemblies



Camlock C x E



NPSH M x F

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WD10-0150CE50	1-1/2	C	E	50	Band Clamps
WD10-0200CE50	2	C	E	50	Band Clamps
WD10-0300CE50	3	C	E	50	Band Clamps
WD10-0400CE50	4	C	E	50	Band Clamps
WD10-0600CE50	6	C	E	50	Band Clamps
WD10-0150MF50	1-1/2	M-NPSH	F-NPSH	50	Band Clamps
WD10-0200MF50	2	M-NPSH	F-NPSH	50	Band Clamps
WD10-0300MF50	3	M-NPSH	F-NPSH	50	Band Clamps
WD10-0400MF50	4	M-NPSH	F-NPSH	50	Band Clamps
WD10-0600MF50	6	M-NPSH	F-NPSH	50	Band Clamps



14



## WD12 Gray PVC Layflat

- Tube:** Gray PVC
- Reinforcement:** Synthetic fiber
- Cover:** Gray PVC
- Temperature:** 15°F to +130°F (-10°C to +55°C)
- Application:** A medium duty layflat hose for portable pump and irrigation use.

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
WD12-150	1-1/2	1.63	41.5	75	0.19	300' - Coil
WD12-200	2	2.13	54.2	120	0.26	300' - Coil
WD12-300	3	3.23	82.0	110	0.44	300' - Coil
WD12-400	4	4.39	111.6	110	0.73	300' - Coil
WD12-600	6	6.20	157.4	35	1.14	300' - Coil

## WD12 Assemblies



Camlock C x E



NPSH M x F

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WD12-0150CE50	1-1/2	C	E	50	Band Clamps
WD12-0200CE50	2	C	E	50	Band Clamps
WD12-0300CE50	3	C	E	50	Band Clamps
WD12-0400CE50	4	C	E	50	Band Clamps
WD12-0600CE50	6	C	E	50	Band Clamps
WD12-0150MF50	1-1/2	M-NPSH	F-NPSH	50	Band Clamps
WD12-0200MF50	2	M-NPSH	F-NPSH	50	Band Clamps
WD12-0300MF50	3	M-NPSH	F-NPSH	50	Band Clamps
WD12-0400MF50	4	M-NPSH	F-NPSH	50	Band Clamps
WD12-0600MF50	6	M-NPSH	F-NPSH	50	Band Clamps

*Other lengths and fitting combinations are available.*





## WD13 Brown Pvc Layflat (Canadian Market)



- Tube:** Brown PVC
- Reinforcement:** Synthetic fiber
- Cover:** Brown PVC
- Temperature:** 5°F to +130°F (-10°C to +55°C)
- Application:** This hose is a more rugged version of our blue PVC layflat hose, designed for use where higher working pressures are required. Common applications are rental, construction, mining, agricultural and marine service.

14

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
WD13-150	1-1/2	1.63	41.4	120	0.15	300' - Coil
WD13-200	2	2.14	54.4	115	0.23	300' - Coil
WD13-250	2-1/2	2.63	66.8	100	0.30	300' - Coil
WD13-300	3	3.13	79.5	100	0.36	300' - Coil
WD13-400	4	4.13	104.9	90	0.50	300' - Coil
WD13-600	6	6.15	156.2	75	0.80	300' - Coil
WD13-800	8	8.17	207.5	75	1.31	300' - Coil

## WD13 Assemblies



CAMLOCK C x E



NPSH M x F

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WD13-0150CE50	1-1/2	C	E	50	Band Clamps
WD13-0200CE50	2	C	E	50	Band Clamps
WD13-0300CE50	3	C	E	50	Band Clamps
WD13-0400CE50	4	C	E	50	Band Clamps
WD13-0600CE50	6	C	E	50	Band Clamps
WD13-0150MF50	1-1/2	M-NPSH	F-NPSH	50	Band Clamps
WD13-0200MF50	2	M-NPSH	F-NPSH	50	Band Clamps
WD13-0300MF50	3	M-NPSH	F-NPSH	50	Band Clamps
WD13-0400MF50	4	M-NPSH	F-NPSH	50	Band Clamps
WD13-0600MF50	6	M-NPSH	F-NPSH	50	Band Clamps

Other lengths and fitting combinations are available.

14



## WD14 HD Red PVC Layflat

- Tube:** Red PVC
- Reinforcement:** Synthetic fiber
- Cover:** Red PVC
- Temperature:** 5°F to +130°F (-10°C to +55°C)
- Application:** This hose is a more rugged version of our blue PVC layflat hose, designed for use where higher working pressures are required. Common applications are rental, construction, mining, agricultural and marine service.

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
WD14-150	1-1/2	1.65	41.9	150	0.20	300' - Coil
WD14-200	2	2.16	54.9	150	0.28	300' - Coil
WD14-250	2-1/2	2.67	67.8	150	0.44	300' - Coil
WD14-300	3	3.19	81.0	150	0.54	300' - Coil
WD14-400	4	4.20	106.7	125	0.67	300' - Coil
WD14-600	6	6.21	157.7	115	1.25	300' - Coil
WD14-800	8	8.22	208.9	70	1.48	300' - Coil

## WD14 Assemblies



CAMLOCK C x E



NPSH M x F

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WD14-0150CE50	1-1/2	C	E	50	Band Clamps
WD14-0200CE50	2	C	E	50	Band Clamps
WD14-0300CE50	3	C	E	50	Band Clamps
WD14-0400CE50	4	C	E	50	Band Clamps
WD14-0600CE50	6	C	E	50	Band Clamps
WD14-0150MF50	1-1/2	M-NPSH	F-NPSH	50	Band Clamps
WD14-0200MF50	2	M-NPSH	F-NPSH	50	Band Clamps
WD14-0300MF50	3	M-NPSH	F-NPSH	50	Band Clamps
WD14-0400MF50	4	M-NPSH	F-NPSH	50	Band Clamps
WD14-0600MF50	6	M-NPSH	F-NPSH	50	Band Clamps

*Other lengths and fitting combinations are available.*



## WD15 HIVIZ Green PVC Layflat (Phthalate Free) 150

- Tube:** Green PVC
- Reinforcement:** Synthetic fiber
- Cover:** HIVIZ Green PVC
- Temperature:** 5°F to +130°F (-10°C to +55°C)
- Application:** This hose is a more rugged version of our blue PVC layflat hose, designed for use where higher working pressures are required. Common applications are rental, construction, mining, agricultural and marine service.



14

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
WD15-200	2	2.14	54.4	150	0.23	300' - Coil
WD15-300	3	3.13	79.5	150	0.36	300' - Coil

### WD15 Assemblies



CAMLOCK C x E

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WD15-200CE050	2	C	E	50	Band Clamps
WD15-300CE050	3	C	E	50	Band Clamps
WD15-200MF050	2	M-NPSH	F-NPSH	50	Band Clamps
WD15-300MF050	3	M-NPSH	F-NPSH	50	Band Clamps

Other lengths and fitting combinations are available.



NPSH M x F



## WD20 Nitrile Discharge

- Tube:** Black PVC/Nitrile
- Reinforcement:** Circular woven synthetic fiber
- Cover:** Black ribbed abrasion and oil resistant nitrile/PVC rubber
- Temperature:** -22°F to +176°F (-30°C to +80°C)
- Application:** This is a lightweight high pressure, extremely strong hose for plant washdown, as well as high pressure general water discharge for construction and rental companies.

Part #	Cover	ID	OD		Max WP	Weight	Standard Pack
		in	in	mm	psi	lbs/ft	
WD20-150	Black	1-1/2	1.70	43.1	200	0.24	200' - Coil
WD20-200	Black	2	2.20	55.8	200	0.31	200' - Coil
WD20-250	Black	2-1/2	2.70	68.5	200	0.45	200' - Coil
WD20-300	Black	3	3.20	81.3	200	0.46	200' - Coil
WD20-400	Black	4	4.25	108.0	200	0.67	200' - Coil
WD20-600	Black	6	6.25	158.7	150	1.14	200' - Coil
WD20-800	Black	8	8.31	209.3	150	1.51	200' - Coil
WD20-1000	Black	10	10.35	263.0	150	2.25	50' - Coil

\* Available in other colors on request.

## WD20 Assemblies



CAMLOCK C x E



TYPE B

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WD20-150PF050	1-1/2	FNPSH	MNPSH	50	Expanded
WD20-150CE050	1-1/2	C	E	50	Crimp
WD20-200CE050	2	C	E	50	Crimp
WD20-300CE050	3	C	E	50	Crimp
WD20-400CE050	4	C	E	50	Crimp
WD20-600CE050	6	C	E	50	Crimp
WD20-400BS050	4	Ball - Type B	Socket - Type B	50	Crimp
WD20-600BS050	6	Ball - Type B	Socket - Type B	50	Crimp
WD20-800BS050	8	Ball - Type B	Socket - Type B	50	Crimp

Other lengths and fitting combinations are available.

## WD95 TPU Water Discharge Hose



**Tube:** One-piece through the weave TPU  
**Reinforcement:** Circular woven synthetic yarns  
**Cover:** Black abrasion resistant TPU (polyurethane)  
**Temperature:** -58°F to +160°F (-50°C to +70°C)  
**Application:** Designed for construction sites, waste water industry, agriculture and mining, transport of abrasive materials, flexible pipeline even in extreme terrain, irrigation and sludge disposal, for heavy duty service under toughest conditions. Perfectly prepared for hydraulic fraction in shale and oil fields.

14

Part #	ID	OD		Max WP	Min BP	Weight	Standard Pack
	in	in	mm	psi	psi	lbs/ft	
WD95-800-660-G	8	8.30	210.8	200	600	2.35	660' - Reel
WD95-1000-660-G	10	10.33	262.4	200	600	2.75	660' - Reel
WD95-1200-660-G	12	12.33	313.2	150	450	3.40	660' - Reel

\* Includes aluminum Victaulic grooved couplings.  
 \* Also available with stainless Victaulic grooved couplings.



FIELD ATTACHED CLAMP & GROOVED INSERT	
Part #	Hose Size
RGS-800	8"
RGS-1000	10"
RGS-1200	12"



TWO BOLT GROOVED CLAMP	
Part #	Hose Size
GBC-800	8"
GBC-1000	10"
GBC-1200	12"



PLATED STEEL GROOVED INSERT	
Part #	Hose Size
CNG-800	8"
CNG-1000	10"
CNG-1200	12"

\* Sold as sets only.



## WD30 Heavy-Duty Chiller/Water Discharge Hose - 150

- Tube:** Black synthetic rubber
- Reinforcement:** Synthetic fiber
- Cover:** Black synthetic rubber
- Temperature:** -30°F to +180°F (-35°C to +80°C)
- Application:** A heavy duty discharge hose used for rental/construction portable pumps and general water service.
- Branding:** FORSAFLEX WD30-400 4" HEAVY DUTY CHILLER/WATER DISCHARGE HOSE 150 PSI MAX WP

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
WD30-150	1-1/2	1.78	45.1	150	0.49	50/100' - Coil
WD30-200	2	2.32	58.8	150	0.66	50/100' - Coil
WD30-250	2-1/2	2.81	71.5	150	0.86	50/100' - Coil
WD30-300	3	3.38	86.2	150	1.35	50/100' - Coil
WD30-400	4	4.37	110.6	150	1.52	50/100' - Coil
WD30-500	5	5.40	138.0	150	2.25	50/100' - Coil
WD30-600	6	6.46	164.4	150	2.84	50/100' - Coil
WD30-800	8	8.54	217.0	150	4.20	50/100' - Coil
WD30-1000	10	10.55	268.0	150	5.78	50' - Coil

## WD30 Assemblies



ALUMINUM C x E



BRASS C x E



TYPE B

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WD30-200CE050	2	Aluminum C	Aluminum E	50	Crimp
WD30-300CE050	3	Aluminum C	Aluminum E	50	Crimp
WD30-400CE050	4	Aluminum C	Aluminum E	50	Crimp
WD30-600CE050	6	Aluminum C	Aluminum E	50	Crimp
WD30-200CE050-BR	2	Brass C	Brass E	50	Crimp
WD30-300CE050-BR	3	Brass C	Brass E	50	Crimp
WD30-400CE050-BR	4	Brass C	Brass E	50	Crimp
WD30-400BS050	4	Ball - Type B	Socket - Type B	50	Crimp
WD30-600BS050	6	Ball - Type B	Socket - Type B	50	Crimp
WD30-800BS050	8	Ball - Type B	Socket - Type B	50	Crimp

Other lengths and fitting combinations are available.





## WD32 Water Jetting 800

- Tube:** NBR/SBR, light oil resistance
- Reinforcement:** Synthetic fiber
- Cover:** Black synthetic rubber
- Temperature:** -22°F to +185°F (-30°C to +85°C)
- Application:** Stripping layers from hard surfaces, strip mining and washdown applications. Contact factory for proper fitting recommendation and coupling procedure.
- Branding:** FORSAFLEX WD32-400 4" WATER JETTING 800 PSI MAX WP

14

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
WD32-300	3	3.87	98.2	800	2.50	100' - Coil
WD32-400	4	5.02	127.6	800	3.70	100' - Coil
WD32-600	6	7.10	180.4	600	5.60	100' - Coil



## WD35/WD38 SJ/DJ Industrial Mill Discharge

14



- Tube:** Black synthetic rubber
- Cover:** Single/double jacket, synthetic fiber
- Temperature:** -25°F to +185°F (-31°C to +85°C)
- Application:** A very economical pump discharge and washdown hose.  
**Not approved for fire fighting service.**

WD35 Single Jacket					
Part #	ID	OD		Weight	Standard Pack
	in	in	mm	lbs/ft	
WD35-100	1	1-3/16	150	0.15	50/100' - Coil
WD35-150	1-1/2	1-3/4	150	0.23	50/100' - Coil
WD35-200	2	2-1/4	150	0.28	50/100' - Coil
WD35-250	2-1/2	2-3/4	150	0.39	50/100' - Coil
WD35-300	3	3-5/16	150	0.50	50/100' - Coil
WD35-400	4	4-3/8	150	0.66	50/100' - Coil

WD38 Double Jacket					
Part #	ID	OD		Weight	Standard Pack
	in	in	mm	lbs/ft	
WD38-100	1	1-3/8	250	0.19	50/100' - Coil
WD38-150	1-1/2	1-13/16	250	0.26	50/100' - Coil
WD38-200	2	2-5/16	250	0.33	50/100' - Coil
WD38-250	2-1/2	2-13/16	250	0.45	50/100' - Coil
WD38-300	3	3-3/8	250	0.61	50/100' - Coil
WD38-400	4	4-1/2	250	0.85	50/100' - Coil

### WD35 Assemblies




NPSH F x M

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WD35-150PF050	1-1/2	FNPSH	MNPSH	50	Expanded
WD35-250CSA050	2-1/2	FCSA	MCSA	50	Expanded
WD35-150FC050	1-1/2	Forestry	Forestry	50	Expanded
WD35-150FC100	1-1/2	Forestry	Forestry	100	Expanded

Other lengths and fitting combinations are available.



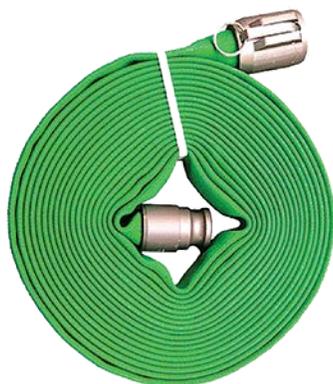

## WD45 Avalanche Snowmaking

- Tube:** Extremely smooth black synthetic rubber
- Reinforcement:** Woven filament polyester
- Cover:** Woven filament polyester
- Temperature:** As low as -55°F (-48°C)
- Application:** Designed for snowmaking, featuring a high performance construction.

Part #	ID	OD		Weight	Standard Pack
	in	in	mm	lbs/ft	
WD45-150	1-1/2	1-15/16	800	0.24	100' - Coil
WD45-200	2	2-5/16	800	0.32	100' - Coil
WD45-250	2-1/2	2-13/16	800	0.44	100' - Coil

## WD45 Assemblies

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WD45-150CE015	1-1/2"	1-1/2" - C	1-1/2" - E	15	Internal Expanded
WD45-150CE025	1-1/2"	1-1/2" - C	1-1/2" - E	25	Internal Expanded
WD45-150CE050	1-1/2"	1-1/2" - C	1-1/2" - E	50	Internal Expanded
WD45-150CE100	1-1/2"	1-1/2" - C	1-1/2" - E	100	Internal Expanded
WD45-150CE015-2	1-1/2"	2" - C	2" - E	15	Internal Expanded
WD45-150CE025-2	1-1/2"	2" - C	2" - E	25	Internal Expanded
WD45-150CE050-2	1-1/2"	2" - C	2" - E	50	Internal Expanded
WD45-150CE100-2	1-1/2"	2" - C	2" - E	100	Internal Expanded
WD45-200CE015	2"	2" - C	2" - E	15	Internal Expanded
WD45-200CE025	2"	2" - C	2" - E	25	Internal Expanded
WD45-200CE050	2"	2" - C	2" - E	50	Internal Expanded
WD45-200CE100	2"	2" - C	2" - E	100	Internal Expanded
WD45-250CE015	2-1/2"	2-1/2" - C	2-1/2" - E	15	Internal Expanded
WD45-250CE025	2-1/2"	2-1/2" - C	2-1/2" - E	25	Internal Expanded
WD45-250CE050	2-1/2"	2-1/2" - C	2-1/2" - E	50	Internal Expanded
WD45-250CE100	2-1/2"	2-1/2" - C	2-1/2" - E	100	Internal Expanded

14



## WD70 White Hot Water Washdown Hose

- Tube:** EPDM
- Reinforcement:** Synthetic fiber
- Cover:** EPDM with Microban
- Temperature:** -40°F to +210°F (-40°C to +99°C)
- Application:** A high-quality hose for hot water cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries, and creameries.

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
WD70-050	1/2	0.91	21.3	300	0.27	500' - Reel
WD70-075	3/4	1.18	29.7	300	0.40	500' - Reel
WD70-100	1"	1.50	37.3	300	0.60	450' - Reel



## WD90 Green Papermill Washdown

- Tube:** Black synthetic rubber
- Reinforcement:** Synthetic fiber
- Cover:** Green abrasion resistant synthetic rubber
- Temperature:** -31°F to +176°F (-35°C to +80°C)
- Application:** Suitable for hot or cold water washdown service in paper mills. Hose incorporates an integral built-in tapered rubber nozzle.
- Branding:** FORSAFLEX WD90-100 1" PAPERMILL WASHDOWN HOSE 250 PSI MAX WP

Part #	ID	OD		Max WP	Weight	Standard Pack
	in	in	mm	psi	lbs/ft	
WD90-075	3/4	1.26	32.0	250	0.40	50' - Coil
WD90-100	1	1.50	37.0	250	0.56	50' - Coil

\* Both the 3/4" and 1" built-in tapered nozzle have a 3/8" ID orifice





## WS50 HD Rubber Water Suction & Discharge

**Tube:** Black synthetic rubber

**Reinforcement:** A high tensile steel helix embedded between layers of textile cords

**Cover:** Black synthetic rubber

**Temperature:** -25°F to +185°F (-30°C to +85°C)

**Application:** A heavy duty wire reinforced rubber suction hose for rental, construction, quarries and general industrial use.

**Branding:** FORSAFLEX WS50-200 2" HD WATER SUCTION HOSE 150 PSI MAX WP

Part #	ID	OD		Max WP	Min BR	Vacuum	Weight	Standard Pack
	in	in	mm	psi	in	in/Hg	lbs/ft	
WS50-150	1-1/2	1.93	49.0	150	6.5	29	0.80	100' - Coil
WS50-200	2	2.47	62.8	150	8.0	29	1.10	100' - Coil
WS50-250	2-1/2	2.97	75.5	150	10.0	29	1.75	100' - Coil
WS50-300	3	3.51	89.2	150	12.0	29	2.24	100' - Coil
WS50-400	4	4.55	115.6	150	18.0	29	2.79	100' - Coil
WS50-500	5	5.68	144.0	150	26.0	29	3.25	100' - Coil
WS50-600	6	6.55	166.4	150	31.0	29	5.75	20/100' - Coil
WS50-800	8	8.79	223.2	150	42.0	29	6.59	20/100' - Coil
WS50-1000	10	10.86	276.0	150	50.0	29	10.25	20' - LG
WS50-1200	12	12.87	327.0	150	60.0	29	13.50	20' - LG

## WS50 Assemblies

15



CAMLOCK C x E

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WS50-150CE020	1-1/2	C	E	20	Crimp
WS50-200CE020	2	C	E	20	Crimp
WS50-300CE020	3	C	E	20	Crimp
WS50-400CE020	4	C	E	20	Crimp
WS50-600CE020	6	C	E	20	Crimp
WS50-800CE020	8	C	E	20	Crimp

Other lengths are available.



TYPE B

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WS50-400BS020	4	Ball - Type B	Socket - Type B	20	Crimp
WS50-600BS020	6	Ball - Type B	Socket - Type B	20	Crimp
WS50-800BS020	8	Ball - Type B	Socket - Type B	20	Crimp
WS50-1000BS020	10	Ball - Type B	Socket - Type B	20	Crimp
WS50-1200BS020	12	Ball - Type B	Socket - Type B	20	Crimp
WS50-1000BS020-A	10	Ball - Type A	Socket - Type A	20	Crimp
WS50-1200BS020-A	12	Ball - Type A	Socket - Type A	20	Crimp

Other lengths are available.



TYPE A



TYPE B

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WS50-400FFL020	4	Fixed Flange	Floating Flange	20	Crimp
WS50-600FFL020	6	Fixed Flange	Floating Flange	20	Crimp
WS50-800FFL020	8	Fixed Flange	Floating Flange	20	Crimp
WS50-1000FFL020	10	Fixed Flange	Floating Flange	20	Crimp

Other lengths are available.



TYPE A

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WS50-600GG020					Crimp
WS50-800GG020	8	Vic	Vic	20	Crimp
WS50-1000GG020	10	Vic	Vic	20	Crimp
WS50-1200GG020	12	Vic	Vic	20	Crimp

Other lengths are available.



## WS52 Premium EPDM Suction Hose

**Tube:** Black EPDM

**Reinforcement:** A high tensile steel helix embedded between layers of textile cords

**Cover:** Black weather and abrasion resistant EPDM rubber

**Temperature:** -22°F to +203°F (-30°C to +95°C)

**Application:** EPDM suction hose is designed for improved weathering and chemical resistance. A heavy duty wire reinforced rubber suction hose for rental, construction, quarries and general industrial use. It is often used for glycol supply lines on portable heating units.

FORSAFLEX WS52-200 2" EPDM SUCTION HOSE 150 PSI MAX WP

15

Part #	ID	OD		Max WP	Min BR	Vacuum	Weight	Standard Pack
	in	in	mm	psi	in	in/Hg	lbs/ft	
WS52-075	3/4	1.18	30.0	200	4.0	29	0.45	100' - Coil
WS52-100	1	1.43	36.4	200	5.4	29	0.54	100' - Coil
WS52-125	1-1/4	1.65	41.9	200	6.3	29	0.66	100' - Coil
WS52-150	1-1/2	1.89	48.0	200	7.0	29	0.70	100' - Coil
WS52-200	2	2.47	62.8	150	10.0	29	1.05	100' - Coil
WS52-300	3	3.47	88.2	150	12.0	29	1.50	100' - Coil
WS52-400	4	4.55	115.6	150	19.0	29	2.65	100' - Coil

15



## WS60 Green PVC Suction Hose

- Tube:** Green PVC
- Reinforcement:** PVC helix
- Cover:** Green PVC
- Temperature:** -4°F to +158°F (-20°C to +70°C)
- Application:** For rental and construction pumps, septic tank, marine pump out service and hydro-seeding. PVC is resistant to some chemicals, acids and alkalis.

Part #	ID	OD		Max WP	Min BR	Vacuum	Weight	Standard Pack
	in	in	mm	psi	in	in/Hg	lbs/ft	
WS60-075	3/4	1.01	25.6	110	28	3.0	0.19	100' - Coil
WS60-100	1	1.26	32.0	85	28	3.0	0.26	100' - Coil
WS60-125	1-1/4	1.56	39.6	85	28	4.0	0.35	100' - Coil
WS60-150	1-1/2	1.83	46.5	70	28	5.0	0.46	100' - Coil
WS60-200	2	2.32	59.0	65	28	7.0	0.66	100' - Coil
WS60-250	2-1/2	2.87	73.0	65	28	8.0	0.87	100' - Coil
WS60-300	3	3.43	87.0	60	28	10.0	1.24	100' - Coil
WS60-400	4	4.50	114.7	50	28	15.0	1.85	100' - Coil
WS60-500	5	5.58	149.3	45	28	22.0	2.42	100' - Coil
WS60-600	6	6.75	171.4	40	28	30.0	3.39	100' - Coil
WS60-800	8	9.18	225.0	30	28	35.0	5.97	20' - Coil

## WS60 Assemblies



CAMLOCK C x E



CAMLOCK C x NPT

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WS60-150CE020	1-1/2	C	E	20	Band Clamps
WS60-200CE020	2	C	E	20	Band Clamps
WS60-300CE020	3	C	E	20	Band Clamps
WS60-400CE020	4	C	E	20	Band Clamps
WS60-600CE020	6	C	E	20	Band Clamps
WS60-150CM020	1-1/2	C	NPT	20	Band Clamps
WS60-200CM020	2	C	NPT	20	Band Clamps
WS60-300CM020	3	C	NPT	20	Band Clamps
WS60-400CM020	4	C	NPT	20	Band Clamps
WS60-600CM020	6	C	NPT	20	Band Clamps

*Other lengths are available.*





## WS62 Clear/White PVC Suction Hose

- Tube:** Clear PVC
- Reinforcement:** PVC helix
- Cover:** Clear PVC
- Temperature:** -4°F to +158°F (-20°C to +70°C)
- Application:** For rental and construction pumps, septic tank, marine pump out service and hydro-seeding. PVC is resistant to some chemicals, acids and alkalis.

15

Part #	ID	OD		Max WP	Min BR	Vacuum	Weight	Standard Pack
	in	in	mm	psi @ 20°C / 70°F	in	in/Hg	lbs/ft	
WS62-075	3/4	1.01	25.6	110	28	3.0	0.19	100' - Coil
WS62-100	1	1.26	32.0	85	28	3.0	0.26	100' - Coil
WS62-125	1-1/4	1.56	39.6	85	28	4.0	0.35	100' - Coil
WS62-150	1-1/2	1.83	46.5	70	28	5.0	0.46	100' - Coil
WS62-200	2	2.32	59.0	65	28	7.0	0.66	100' - Coil
WS62-250	2-1/2	2.87	73.0	65	28	8.0	0.87	100' - Coil
WS62-300	3	3.43	87.0	60	28	10.0	1.24	100' - Coil
WS62-400	4	4.50	114.7	50	28	15.0	1.85	100' - Coil
WS62-500	5	5.58	149.3	45	28	22.0	2.42	100' - Coil
WS62-600	6	6.75	171.4	40	28	30.0	3.39	100' - Coil
WS62-800	8	9.18	225.0	30	28	35.0	5.97	20' - Coil

## WS62 Assemblies



CAMLOCK C x E



CAMLOCK C x NPT

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WS62-150CE020	1-1/2	C	E	20	Band Clamp
WS62-200CE020	2	C	E	20	Band Clamp
WS62-300CE020	3	C	E	20	Band Clamp
WS62-400CE020	4	C	E	20	Band Clamp
WS62-150CM020	1-1/2	C	NPT	20	Band Clamp
WS62-200CM020	2	C	NPT	20	Band Clamp
WS62-300CM020	3	C	NPT	20	Band Clamp
WS62-400CM020	4	C	NPT	20	Band Clamp



## WS64 Cold Temp PVC Suction Hose



- Tube:** Clear low temp PVC
- Reinforcement:** Blue PVC helix
- Cover:** Clear low temp PVC
- Temperature:** -40°F to +150°F (-40°C to +65°C)
- Application:** A flexible hose for construction pumps, septic tank & marine pump-out service. Resistant to some chemicals, mild acids & alkalis. Specially formulated compounds allow for increased flexibility at low temperatures.

15

Part #	ID	OD		Max WP	Min BR	Vacuum	Weight	Standard Pack
	in	in	mm	psi @ 20°C / 70°F	in	in/Hg	lbs/ft	
WS64-075	3/4	1.01	25.6	115	29	3.0	0.19	100' - Coil
WS64-100	1	1.26	32.0	90	29	3.0	0.22	100' - Coil
WS64-125	1-1/4	1.56	39.6	90	29	4.0	0.36	100' - Coil
WS64-150	1-1/2	1.79	45.5	90	29	5.0	0.48	100' - Coil
WS64-200	2	2.35	59.8	90	29	7.0	0.62	100' - Coil
WS64-250	2-1/2	2.87	73.0	70	29	8.0	0.87	100' - Coil
WS64-300	3	3.43	87.0	65	29	10.0	1.23	100' - Coil
WS64-400	4	4.49	114.0	55	29	15.0	1.83	100' - Coil
WS64-500	5	5.57	141.5	45	28	25.0	2.42	100' - Coil
WS64-600	6	6.69	170.0	40	28	30.0	3.36	100' - Coil

## WS64 Assemblies



CAMLOCK C x E



CAMLOCK C x NPT

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WS64-150CE020	1-1/2	C	E	20	Band Clamp
WS64-200CE020	2	C	E	20	Band Clamp
WS64-300CE020	3	C	E	20	Band Clamp
WS64-400CE020	4	C	E	20	Band Clamp
WS64-150CM020	1-1/2	C	NPT	20	Band Clamp
WS64-200CM020	2	C	NPT	20	Band Clamp
WS64-300CM020	3	C	NPT	20	Band Clamp
WS64-400CM020	4	C	NPT	20	Band Clamp





## WS65 HD PVC Suction (SR Style)



- Tube:** Clear PVC
- Reinforcement:** Orange PVC helix with synthetic fiber
- Cover:** Clear PVC
- Temperature:** -4°F to +150°F (-20°C to +65°C)
- Application:** Good for both suction and discharge applications, this heavy duty hose can be used for rental/construction pumping as well as fish suction hose.

Part #	ID		OD		Max WP	Min BR	Vacuum	Weight	Standard Pack
	in	in	mm	mm	psi @ 20°C / 70°F	in	in/Hg	lbs/ft	
WS65-200	2	2.60	66.0		100	4.0	29.0	0.70	100' - Coil
WS65-300	3	3.62	92.0		100	6.3	28.0	1.13	100' - Coil
WS65-400	4	4.76	121.0		75	7.1	28.0	1.74	100' - Coil
WS65-600	6	7.17	182.1		70	10.2	28.0	3.88	20', 60', 100' - Coil
WS65-800	8	9.21	234.0		60	15.7	28.0	5.54	20' - 25' - Length
WS65-1000	10	11.63	295.4		40	25.0	28.0	8.90	20' - 25' - Length
WS65-1200	12	13.66	347.0		30	45.0	25.0	10.30	20' - Length

\* Counter-Clockwise / Left Hand Helix

## WS65 Assemblies



CAMLOCK C x E

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WS65-200CE020	2	C	E	20	Crimp
WS65-300CE020	3	C	E	20	Crimp
WS65-400CE020	4	C	E	20	Crimp
WS65-600CE020	6	C	E	20	Crimp



TYPE B

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WS65-400BS020	4	Ball - Type B	Socket - Type B	20	Crimp
WS65-600BS020	6	Ball - Type B	Socket - Type B	20	Crimp
WS65-800BS020	8	Ball - Type B	Socket - Type B	20	Crimp
WS65-1000BS020	10	Ball - Type B	Socket - Type B	20	Crimp
WS65-1200BS020	12	Ball - Type B	Socket - Type B	20	Crimp
WS65-1000BS020-A	10	Ball - Type A	Socket - Type A	20	Crimp
WS65-1200BS020-A	12	Ball - Type A	Socket - Type A	20	Crimp



TYPE A



## WS62 Air Seeder

**Tube:** PVC  
**Reinforcement:** PVC helix  
**Cover:** PVC  
**Temperature:** -4°F to +158°F (-20°C to +70°C)  
**Application:** Agricultural air seeder equipment.

15

Part #	Helix/Cover	ID			Max WP	Min BR	Vacuum	Weight	Standard Pack
		in	in	mm					
WS62-075	White/clear	3/4	1.00	25.4	86	3.0	28	0.19	100' Coil
WS62-100	White/clear	1	1.25	31.8	86	3.0	28	0.26	100' Coil
WS62-100BK	Black/clear	1	1.25	31.8	86	3.0	28	0.26	100' Coil
WS62-100SBK	Solid Black	1	1.25	31.8	86	3.0	28	0.26	100' Coil
WS62-125	White/clear	1-1/4	1.47	37.3	80	4.0	28	0.35	100' Coil
WS62-150	White/clear	1-1/2	1.77	45.0	70	5.0	28	0.46	100' Coil
WS62-200	White/clear	2	2.30	58.4	65	7.0	28	0.66	100' Coil
WS62-250	White/clear	2-1/2	2.84	72.1	65	8.0	28	0.87	100' Coil
WS62-250BK	Black/clear	2-1/2	2.84	72.1	65	8.0	28	0.87	100' Coil
WS62-250SBK	Solid Black	2-1/2	2.84	72.1	65	8.0	28	0.87	100' Coil
WS62-300	White/clear	3	3.35	85.1	55	10.0	28	1.24	100' Coil
WS62-300BK	Black/clear	3	3.35	85.1	55	10.0	28	1.24	100' Coil



## KURD Polyurethane Air Seeder

**Tube:** Polyurethane  
**Reinforcement:** PVC helix  
**Cover:** Polyurethane  
**Temperature:** -20°F to +150°F (-29°C to +65°C)  
**Application:** Designed for dry applications to provide longer hose life and lower operating costs versus rubber or PVC hoses.

Part #	Helix/Cover	ID			Max WP	Min BR	Vacuum	Weight	Standard Pack
		in	in	mm					
KURD-250BK	Black/clear	2-1/2	3.14	79.7	4.5	4.0	28	0.90	100' Coil
KURD-250RD	Red/clear	2-1/2	3.14	79.7	4.5	4.0	28	0.90	100' Coil





## WS80 EPDM Suction Hose



**Tube:** Black smooth EPDM  
**Cover:** Green, blue or red polyethylene helix  
**Temperature:** -40°F to +160°F (-40°C to +71°C)  
**Application:** For rental and construction pumps, septic tank, agricultural and marine pump out service. EPDM is resistant to some chemicals, acids and alkalis

**Colors:** Green-GR, Blue-BL, Red-RD, Yellow-YW

15

Part #	ID	OD		Max WP	Min BR	Vacuum	Weight	Standard Pack
	in	in	mm	psi	in	in/Hg	lbs/ft	
WS80-100GR	1	1.40	35.5	65	2	Full	0.28	100' - Coil
WS80-125GR	1-1/4	1.63	41.4	60	3	Full	0.33	100' - Coil
WS80-150GR	1-1/2	1.93	49.0	50	3	Full	0.44	100' - Coil
WS80-200GR	2	2.51	63.8	50	5	Full	0.67	100' - Coil
WS80-250GR	2-1/2	3.07	78.0	45	5.5	Full	0.95	100' - Coil
WS80-300GR	3	3.60	91.5	45	7	Full	1.14	100' - Coil
WS80-400GR	4	4.70	119.5	40	11.5	Full	1.84	100' - Coil
WS80-600GR	6	6.85	174	30	20	28	3.07	100' - Coil

## WS80 Assemblies



CAMLOCK C x E

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WS80-150CE020GR	1-1/2	C	E	20	Clamp
WS80-200CE020GR	2	C	E	20	Clamp
WS80-300CE020GR	3	C	E	20	Clamp
WS80-400CE020GR	4	C	E	20	Clamp
WS80-600CE020GR	6	C	E	20	Clamp

*Other lengths and fitting combinations are available.  
 Some colors are non-stock and may require minimum runs.*



CAMLOCK C x NPT

Part #	Hose Size	Fitting A	Fitting B	Length ft	Attaching Method
WS80-150CM020GR	1-1/2	C	NPT	20	Clamp
WS80-200CM020GR	2	C	NPT	20	Clamp
WS80-300CM020GR	3	C	NPT	20	Clamp
WS80-400CM020GR	4	C	NPT	20	Clamp
WS80-600CM020GR	6	C	NPT	20	Clamp

*Other lengths and fitting combinations are available.  
 Some colors are non-stock and may require minimum runs.*

15



## WS75 Honey Bee Suction Hose

**Tube & Cover:** Black and yellow polyethylene

**Temperature:** -40°F to +150°F (-40°C to +65°C)

**Application:** Honey Bee is specifically designed for use in septic handling, retail, construction, dewatering, environmental clean-up, and sewer inspection equipment where extreme use and durability is required.

**DO NOT USE FOR DISCHARGE APPLICATIONS.**

Part #	ID	OD		Max WP	Min BR	Vacuum	Weight
	in	in	mm	psi @ 20°C / 70°F	in	in/Hg	lbs/ft
WS75-200-3	2	2.76	70.0	3	15	27	0.72
WS75-200-15	2	2.76	70.0	15	15	27	0.72
WS75-200-25	2	2.76	70.0	25	15	27	0.72
WS75-200-30	2	2.76	70.0	30	15	27	0.72
WS75-200-50	2	2.76	70.0	50	15	27	0.72
WS75-200-60	2	2.76	70.0	60	15	27	0.72
WS75-300-3	3	4.06	103.0	3	7	27	1.36
WS75-300-15	3	4.06	103.0	15	7	27	1.36
WS75-300-25	3	4.06	103.0	25	7	27	1.36
WS75-300-30	3	4.06	103.0	30	7	27	1.36
WS75-300-50	3	4.06	103.0	50	7	27	1.36
WS75-300-60	3	4.06	103.0	60	7	27	1.36

## WHIP Whip Checks

Hoses can whip if they become accidentally uncoupled or tear away from the fitting. Whip checks act to control whipping in the event of a failure. Spring-loaded loops in the cable ends open easily to pass over the couplings, for a firm grip on the hose. ;

To function properly, restraint cables must be installed in a fully extended position with no slack. Maximum working pressure is 200 PSI.



Part #	Length	Hose-to-Hose
WHIP-S	20"	1/8" cable for 1/2" to 1-1/4" hose-to-hose
WHIP-L	38"	1/4" cable for 1-1/2" to 3" hose-to-hose
WA-4	44"	3/8" cable for 4" hose-to-hose



Correct Installation



Part #	Hose-to-Tool
WHIP-ST	1/8" cable for 1/2" to 1-1/4" hose-to-tool
WHIP-LT	1/4" cable for 1-1/2" to 3" hose-to-tool



Incorrect Installation

## KSW Whipsock



Part #	Size	OD Range	Length	Average Break Strength
	in			
KSW12	3/4	0.75" - 1.13"	25.2"	6,200 lbs
KSW16	1	1.13" - 1.50"	34.3"	14,000 lbs
KSW24	1-1/2	1.88" - 2.38"	49.2"	23,000 lbs
KSW32	2	2.38" - 2.75"	51.2"	23,000 lbs
KSW48	3	3.38" - 3.88"	72.4"	26,000 lbs
KSW64	4	4.75" - 5.50"	86.6"	34,000 lbs

## HH/HHS Nylon Whip Checks

Help protect your workers from injury and your equipment from damage

To reduce damage to equipment and injury to personnel when pipes or hoses accidentally disconnect while under pressure. Suitable for use on pneumatic, water and hydraulic pipes and hoses. Slide the two rubber grommets to keep choked eyes snug on the hose. The available standard lengths will accommodate pipes and hoses with inside diameters from 1/4" up to 10". Meets both OSHA and Canada OHS requirements for restraining devices on pipe and hose connections.

16

### Available in Four Different Strengths




HH230



HH430

OSHA 1926.603(a)(10) states: Safety chains, or equivalent means, shall be provided for each hose connection to prevent the line from thrashing around in case the coupling becomes disconnected.

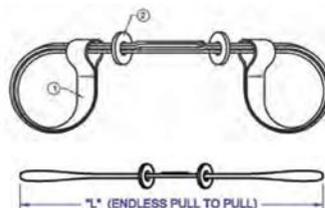

Part #	Length (L)	Maximum Working Pressure (PSI)									
		Recommended for Use on the Following Pipe and Hose Inside Diameters									
		1/4"	1/2"	3/4"	1"	2"	3"	4"	6"	8"	10"
HH130	30"	26,000	6,500	2,900	1,650	400	-	-	-	-	-
HH140	40"	-	-	-	1,650	400	175	100	-	-	-
HH230	30"	52,000	13,000	6,800	3,300	750	-	-	-	-	-
HH244	44"	-	-	-	3,300	750	350	200	-	-	-
HH264	64"	-	-	-	-	750	350	200	90	-	-
HH330	30"	-	29,000	13,000	7,300	1,800	-	-	-	-	-
HH344	44"	-	-	-	7,300	1,800	820	460	-	-	-
HH364	64"	-	-	-	-	1,800	820	460	200	-	-
HH430	30"	-	37,000	16,000	9,400	2,300	-	-	-	-	-
HH444	44"	-	-	-	9,400	2,300	1,040	580	-	-	-
HH464	64"	-	-	-	-	2,300	1,040	580	260	-	-

Round Nylon Whip check												
HHS9X8.000	96"	-	-	-	-	-	-	-	-	-	290	-
HHS12X8.000	96"	-	-	-	-	-	-	-	-	-	370	230
HHS12X9.500	114"	-	-	-	-	-	-	-	-	-	370	230



## BG Safety Blow Guns



Part #	PSI
BG100	150




**16**

**PISTOL GRIP**

Part #	PSI
BG200	150

## PL In Line Lubricators

Air entering the inlet pressurizes both the lower and upper chamber. When the tool reciprocates, there is a sudden pressure drop in the lower chamber. When this occurs, the oil is forced through the valve into the air stream. The amount of oil injected is adjusted by opening or closing the metering valve. Pooling of oil in the line after use can be reduced by turning the unit upside down after shut-down. This allows the pressure in the two chambers to equalize thus eliminating the pressure differential causing the oil flow. Installation is recommended within 25 feet of the tool to be lubricated. Minimum flow rate is 30 SCFM.

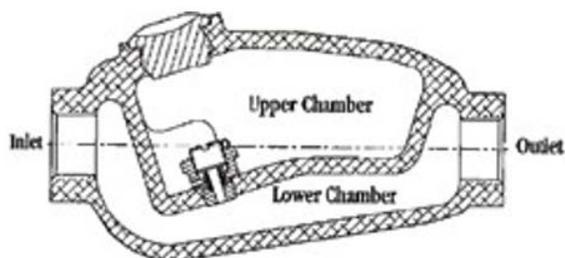

In-line lubricator has a fill plug and sight disc.

Part #	NPT Size	Oil Capacity	Max WP	Air Flow @ 70 PSI
	in		PSIG	
PL-050	1/2	1.4 FL. OZ.	500	30 SCFM
PL-075	3/4	3.7 FL. OZ.	200	70 SCFM
PL-075L	3/4	11.0 FL. OZ.	300	70 SCFM
PL-100	1	16.0 FL. OZ.	250	100 SCFM

## HB Hosebun™



Hosebuns are designed to properly suspend hose and to maintain bend radius and keep the hose from kinking.


Hosebuns are used in the oil & gas, hydraulic, marine, ship-to-shore, gas stations and in mobile equipment industries.

**Material:** Urethane

**Temperature:** -31°C to 200°F (-35°C to 13°C)

Part #	Hose Size	Length	Package Weight	Sling Height	Sling Type	Rated Capacity
	in	in	lbs	in		lbs
HB-200	2	18.00	4.00	7.25	D-Ring	800
HB-300	3	12.75	4.25	8.50	D-Ring	800
HB-400	4	11.50	5.00	8.00	D-Ring	800
HB-600	6	21.50	16.00	22.50	Type 4 Hook Eye	8,000
HB-800	8	30.50	35.00	18.00	Type 4 Hook Eye	12,000

## EZBUN®

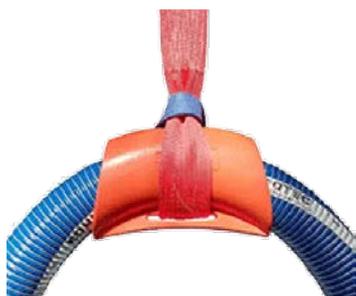

Part #	Mod	in	mm
EZBUN-200STM	Metal Ring	2"	50
EZBUN-200SHR	Short Radius	2"	50
EZBUN-300	Standard Sling	3"	80
EZBUN-400	Standard Sling	4"	100
EZBUN-600	Standard Sling	6"	150

Designed to hang and safely handle flexible hoses, EZBUN® are needful for protecting hoses from excessive bending radius and avoid kinking; they also prevent damages that can be caused by abrasion or impacts, avoiding sliding or twisting of the hose and ensuring stability thanks to their special design.

With no maintenance costs, EZBUN® keeps work sites safer and operates in conditions ranging from -40 to 130°C (-40 to 266°F), with no risk of hydrolysis or aging. Anti-spark, insulating and anti-static, they are resistant to hydrocarbons, oil, petrol, kerosene and many chemicals. Slings, CE approved-UE 23 / EN 1492-1-SF 7:1, are easily replaceable when worn or damaged.

## PGCD/PGDS Dry Stabilizer Gauges - Vibration Control



**2-1/2" Dry Stabilizer Gauge**

A stabilizer dampened movement that eliminates pointer flutter caused by vibration. This makes pressure reading much easier. No more leaky gauges. Won't fog in cold temperatures.

- Stainless steel case
- Brass internals
- +1.5% accuracy
- -4°F to 150°F (-20°C to 65°C)

Part #	ID	Standard Pack
30" - 0 - 30 psi	PGCD2.5-30/30LM	PGCD2.5-30/30CB
0 - 15 psi	PGDS2.5-15LM	PGDS2.5-15CB
0 - 30 psi	PGDS2.5-30LM	PGDS2.5-30CB
0 - 60 psi	PGDS2.5-60LM	PGDS2.5-60CB
0 - 100 psi	PGDS2.5-100LM	PGDS2.5-100CB
0 - 160 psi	PGDS2.5-160LM	PGDS2.5-160CB
0 - 200 psi	PGDS2.5-200LM	PGDS2.5-200CB
0 - 300 psi	PGDS2.5-300LM	PGDS2.5-300CB
0 - 600 psi	PGDS2.5-600LM	PGDS2.5-600CB
0 - 1,000 psi	PGDS2.5-1000LM	PGDS2.5-1000CB
0 - 3,000 psi	PGDS2.5-3000LM	PGDS2.5-3000CB
0 - 5,000 psi	PGDS2.5-5000LM	PGDS2.5-5000CB
0 - 10,000 psi	PGDS2.5-10000LM	PGDS2.5-10000CB

**16**

## PGD Dry Gauge - Standard



**1-1/2" Dry Gauge**

- Stainless steel case
- Brass internals
- +1.5% accuracy
- -4°F to 150°F (-20°C to 65°C)

Range	1-1/2 " Dial 1/4 " Center Back
0 - 30 psi	PGD1.5-30CB
0 - 60 psi	PGD1.5-60CB
0 - 100 psi	PGD1.5-100CB
0 - 160 psi	PGD1.5-160CB
0 - 200 psi	PGD1.5-200CB

## PGCL/PGL Liquid Filled Gauges

16



### 2-1/2" Stainless Steel Liquid Filled Gauge

Range	2-1/2" Dial 1/4" Lower Mount	2-1/2" Dial 1/4" Center Back
30" - 0 - 30 psi	PGCL2.5-30/30LM	PGCL2.5-30/30CB
0 - 15 psi	PGL2.5-15LM	PGL2.5-15CB
0 - 30 psi	PGL2.5-30LM	PGL2.5-30CB
0 - 60 psi	PGL2.5-60LM	PGL2.5-60CB
0 - 100 psi	PGL2.5-100LM	PGL2.5-100CB
0 - 160 psi	PGL2.5-160LM	PGL2.5-160CB
0 - 200 psi	PGL2.5-200LM	PGL2.5-200CB
0 - 300 psi	PGL2.5-300LM	PGL2.5-300CB
0 - 600 psi	PGL2.5-600LM	PGL2.5-600CB
0 - 1,000 psi	PGL2.5-1000LM	PGL2.5-1000CB
0 - 1,500 psi	PGL2.5-1500LM	PGL2.5-1500CB
0 - 2,000 psi	PGL2.5-2000LM	PGL2.5-2000CB
0 - 3,000 psi	PGL2.5-3000LM	PGL2.5-3000CB
0 - 5,000 psi	PGL2.5-5000LM	PGL2.5-5000CB
0 - 6,000 psi	PGL2.5-6000LM	PGL2.5-6000CB
0 - 10,000 psi	PGL2.5-10000LM	PGL2.5-10000CB

- Stainless steel case
- Glycerin filled
- Brass internals
- +1.5% accuracy
- -4°F to 150°F (-20°C to 65°C)



### 4" Stainless Steel Liquid Filled Gauge

Range	4" Dial 1/2" Lower Mount
30" - 0 - 30 psi	PGL4-30/30LM12
0 - 100 psi	PGL4-100LM12
0 - 160 psi	PGL4-160LM12
0 - 200 psi	PGL4-200LM12
0 - 300 psi	PGL4-300LM12
0 - 600 psi	PGL4-600LM12
0 - 1,000 psi	PGL4-1000LM12
0 - 1,500 psi	PGL4-1500LM12
0 - 2,000 psi	PGL4-2000LM12
0 - 3,000 psi	PGL4-3000LM12
0 - 5,000 psi	PGL4-5000LM12
0 - 10,000 psi	PGL4-10000LM12
0 - 15,000 psi	PGL4-15000LM12
0 - 5,000 psi	PGL4-5000LMSS12

- Stainless steel case
- Glycerin filled
- Brass internals
- +1.5% accuracy
- -4°F to 150°F (-20°C to 65°C)



## PG Digital Pressure Gauges



2-1/2" Digital Pressure Gauge

16

Range	2-1/2" Dial 1/4" Lower Mount
0-1450 PSI	PG-Digital-0-100BAR
0-8700 PSI	PG-Digital-0-600BAR

- Simple 2 button operation
- Reset to zero feature
- Backlight turns on when on/off button is pressured
- Option for display to remain continuously on
- ASME B40.100 compliant
- Continuous peak pressure indication option
- +1% accuracy (+0.5% optional for gauges up to 10,000 PSI)
- 14°F to 122°F (-10°C to 50°C)

## PGL Gauge Accessories



Part #	Description
PGL2.5-UC	2-1/2" U-Clamp
PGL2.5-FF	2-1/2" Panel Mount

## NS Nylon Sleeving

- High abrasion resistance
- Resistant to water, oil and hydraulic fluids
- Useful for bundling 2 or more hoses
- MSHA approved flame resistant
- Temperature range: -40°F to 250°F (-40°C to 125°C)



16

Part #	Flat Width	Round ID	Standard Pack
	in	in	ft
NS-077	1.38	0.77	300
NS-090	1.59	0.90	300
NS-100	1.66	1.00	300
NS-114	1.81	1.14	300
NS-122	2.05	1.22	300
NS-138	2.36	1.38	300
NS-159	2.64	1.59	300
NS-181	2.87	1.81	300
NS-219	3.58	2.19	300
NS-238	3.94	2.38	300
NS-263	4.21	2.63	300
NS-296	4.96	2.96	300
NS-366	5.81	3.66	300

## NSV Nylon Sleeve - Velcro

Part #	Flat Width	Round ID	Standard Pack
	in	in	ft
NSV-200B	7.75	2.00	150
NSV-300B	10.90	3.00	150
NSV-400B	14.00	4.00	150
NSV-500B	17.25	5.00	150
NSV-600B	20.38	6.00	150
NSV-700B	23.50	7.00	150
NSV-800B	26.62	8.00	150



## PWMD/PWHD Plastic Wrap

### PWMD Plastic Wrap - Medium Duty



- Ideal for abrasion protection or bundling hose assemblies
- Resistant to water, oil and fuels
- Temperature Range: -58°F to 170°F (-50°C to 77°C)

**16**

Black Part #	Yellow Part #	ID	Wall Thickness	Length
		in	in	ft
PWMD-040B	PWMD-040Y	0.40	0.06	100
PWMD-050B	PWMD-050Y	0.50	0.06	100
PWMD-065B	PWMD-065Y	0.65	0.08	100
PWMD-080B	PWMD-080Y	0.80	0.09	100
PWMD-110B	PWMD-110Y	1.10	0.09	100
PWMD-140B	PWMD-140Y	1.40	0.10	100
PWMD-170B	PWMD-170Y	1.70	0.14	100
PWMD-200B	PWMD-200Y	2.00	0.14	100
PWMD-240B	PWMD-240Y	2.40	0.16	50
PWMD-290B	PWMD-290Y	2.90	0.16	50
PWMD-350B	PWMD-350Y	3.50	0.18	50
PWMD-390B	PWMD-390Y	3.90	0.18	50

### PWHD Plastic Wrap - Heavy Duty



- Ideal for abrasion protection or bundling hose assemblies
- Resistant to water, oil and fuels
- Temperature Range: -58°F to 170°F (-50°C to 77°C)

Black Part #	* Yellow Part #	ID	Wall Thickness	Length
		in	in	ft
PWHD-050B	PWHD-050Y	0.50	0.07	100
PWHD-075B	PWHD-075Y	0.75	0.12	100
PWHD-100B	PWHD-100Y	1.00	0.12	100
PWHD-125B	PWHD-125Y	1.25	0.13	100
PWHD-150B	PWHD-150Y	1.50	0.14	100
PWHD-200B	PWHD-200Y	2.00	0.16	100
PWHD-250B	PWHD-250Y	2.50	0.21	50
PWHD-300B	PWHD-300Y	3.00	0.22	35
PWHD-350B	PWHD-350Y	3.50	0.25	25
PWHD-400B	PWHD-400Y	4.00	0.25	20
PWHD-600B	PWHD-600Y	6.00	0.25	15

\* Yellow is non-stock.



## TCS/TCH Tube Clamps - Single, Twin, & Heavy

## TCS/TCT Tube Clamps - Standard

16



Group	Hole Size		Pipe Size	Tube OD	Standard Clamps	
	in	mm			Standard	Twin Standard
1	0.25	6.4	1/8"	1/4" 3/8"	TCS1-6.4A	TCT1-6.4A
	0.38	9.5			TCS1 - 9.5A	TCT1-9.5A
	0.47	12			TCS1-12A	TCS1 - 12A
2	0.50	12.7	1/4"	1/2"	TCS2-12.7A	TCT2-12.7A
	0.53	13.5			TCS2-13.5A	TCT2-13.5A
	0.63	16	3/8"	5/8"	TCS2-16A	TCT2-16A
	0.67	17.2			TCS2-17.2A	TCT2-17.2A
	0.71	18			TCS2-18A	TCT2-18A
3	0.75	19	1/2"	3/4"	TCS3-19A	TCT3-19A
	0.79	20			TCS3-20A	TCT3-20A
	0.84	21.3		1"	TCS3-21.3A	TCT3-21.3A
	1.00	25.4			TCS3-25.4A	TCT3-25.4A
4	1.06	26.9	3/4"		TCS4-26.9A	TCT4-26.9A
	1.10	28			TCS4-28A	TCT4-28A
5	1.25	32	1"	1-1/4"	TCS5-32A	TCT5-32A
	1.31	33.7		1-1/2"	TCS3-33.7A	TCS3-33.7A
	1.50	38			TCS5-38A	TCT5-38A
	1.57	40			TCS5-40A	TCS5-40A
	1.66	42			TCS5-42A	TCS5-42A
6	1.75	44.5	1-1/2"	1-3/4"	TCS6-44.5A	--
	1.90	48.3		2"	TCS6-48.3A	--
	2.00	50.8			TCS6-50.8A	--

- Stacking nuts and bolts are available



## TCH Tube Clamps - Heavy


**16**

Group	Hole Size		Pipe Size	Tube OD	Clamps
	in	mm			
H1	0.25	6.4	1/8"	1/4"	TCH1-6.4A
	0.38	9.5		3/8"	TCH1-9.5A
	0.50	12.7		1/2"	TCH1-12.7A
	0.53	13.5	1/4"	5/8"	TCH1-13.5A
	0.63	16			TCH1-16A
	0.67	17.2			TCH1-17.2A
H2	0.75	19	1/2"	3/4"	TCH2-19A
	0.79	20			TCH3-20A
	0.84	21.3			TCH2-21.3A
	1.00	25.4	3/4"	1"	TCH2-25.4A
	1.06	26.9			TCH2-26.9A
	1.10	28			TCH2-28A
H3	1.25	32	1"	1-1/4"	TCH3-32A
	1.31	33.7		TCH3-33.7A	
	1.50	38		1-1/2"	TCH3-38A
	1.66	42		TCH3-42A	
H4	1.75	44.5	1-1/2"	1-3/4"	TCH4-44.5A
	1.90	48.3		2"	TCH4-48.3A
	2.00	50.8		2-1/4"	TCH4-50.8A
	2.24	57	2"	2-1/2"	TCH4-57A
	2.38	60.3			TCH4-60.3A
	2.50	63.5			TCH4-63.5A
	2.75	70			TCH4-70A
H5	2.87	73	2-1/2"	3"	TCH5-73A
	3.00	76.1			TCH5-76.1A
	3.50	88.9	4"	4-1/2"	TCH5-88.9A
	4.50	114.3			TCH6-114.3A

- Stacking nuts & bolts are available.



## G Hose Cutter

Part #	Description
G99	Hose Cutters

16



## Caliper Caliper

Part #	Description
Caliper	6" Digital Caliper



## ID101 ID Tags

Part #	Description
ID101	1.5" x 2.5" Type 304 Stainless Tag
P930006	Blue Rect 1.5X3.5 Tag Aluminum Tag



## Cable-tie Cable Tie/Cable Tie Gun

Part #	Description
CABLETIE-BL10	1/4" x 10" Type 304 Stainless Tie
CABLETIE-BL14	1/4" x 14" Type 304 Stainless Tie
CABLETIE-BL-GUN	Automatic Gun



## Colored Preform Clamps


Part #	Description
P811251	Yellow Band Clamps
P811252	Dark Blue Band Clamps
P811253	White Band Clamps
P811254	Red Band Clamps
P811255	Green Band Clamps
P811256	Purple Band Clamps
P811257	Brown Band Clamps
P811259	Grey Band Clamps
P811261	Tan Band Clamps
P811262	Black Band Clamps
P811269	Light Blue Band Clamps

## HR Hose Rack - Large Diameter Hose

### HR-20A-W Hose Rack with wheels

- Can stack 2 high
- Prevents hose & coupling damage
- Removable posts - For easy loading and unloading
- Forklift slots
- 18' long x 39" wide x 45" tall
- 2,500lb capacity
- Empty weight - 540lbs

16

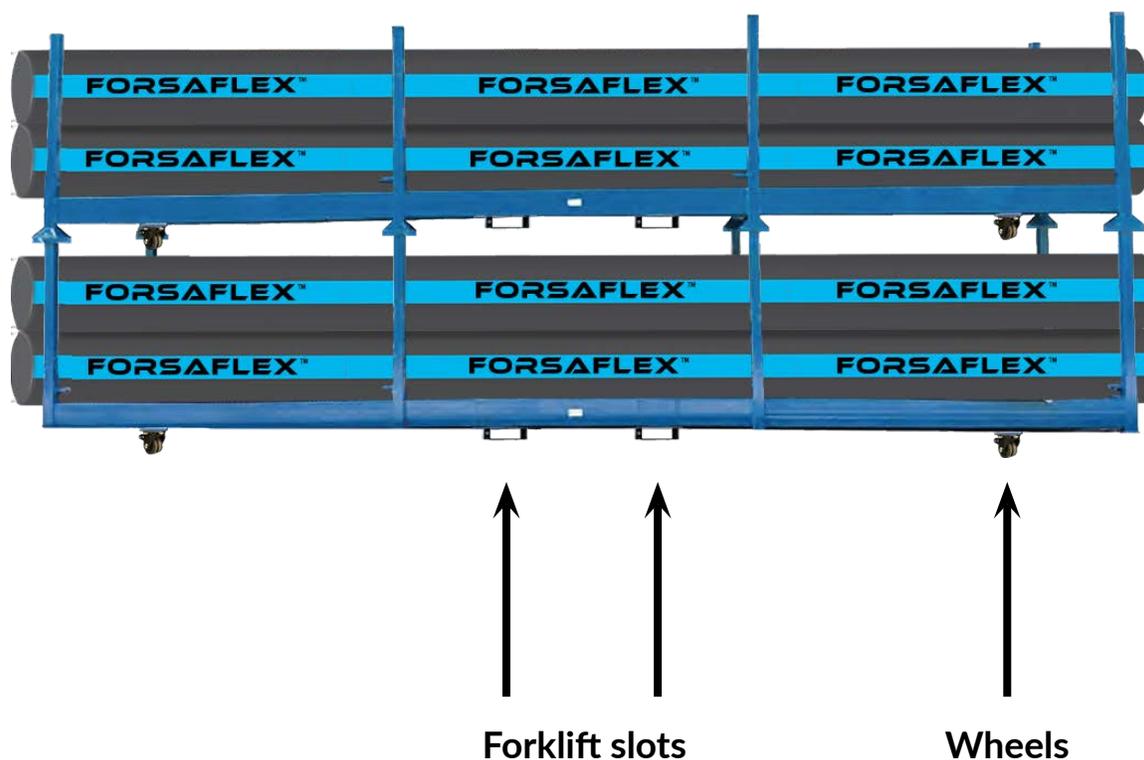

## U Universal / Chicago - 150 PSI Max WP @ 20 ° C / 70 ° F

17



### HOSE END

Size	Part #
3/8"	UH-038
1/2"	UH-050
3/4"	UH-075
1"	UH-100
1-1/4"	* UH-125
1-1/2"	* UH-150
2"	* UH-200

\* 4 Lug



### FEMALE END

Size	Part #
3/8"	UF-038
1/2"	UF-050
3/4"	UF-075
1"	UF-100
1-1/4"	* UF-125
1-1/2"	* UF-150
2"	* UF-200

\* 4 Lug



### MALE END

Size	Part #
3/8"	UM-038
1/2"	UM-050
3/4"	UM-075
1"	UM-100



### TRIPLE CONNECTOR

Part #
UT



### BLANK END

Part #
UB



### GASKETS & SAFETY

Size	Part #	Description
2-Lug	UG-2-BLUE	Oil Resistant, Blue
4-Lug	UG-4	4 Claw, Black
-	AC-1	Safety Clip
-	ACL-8	Lanyard Only



## QM DIX-LOK - 300 PSI Max WP @ 70 ° F / 20 ° C



Male Dix-Lok Hose Shank    Male Dix-Lok Male NPT    Male Dix-Lok Female NPT    Female Dix-Lok Hose Shank    Female Dix-Lok Male NPT    Female Dix-Lok Female NPT    Gaskets

Size	Part #						
3/8"	QM-2	QM-41	QM-81	QM-21	QM-61	QM-101	QBM-2
1/2"	QM-3	QM-42	QM-82	QM-22	QM-62	QM-102	QBM-2
3/4"	QM-4	QM-43	QM-83	QM-23	QM-63	QM-103	QBM-2
1/2"	QM-33*	QM-66*	--	--	--	--	QBM-2
3/4"	QM-44*	QM-88*	--	--	--	--	QBM-2

\* With locking nut

## PHL Thor - 300 PSI Max WP @ 70 ° F / 20 ° C



Thor X Hose Shank    Thor X Female NPT    Thor X Male NPT    Gaskets    Locking Key

Size	Part #				
3/8"	PHL-6	--	PML-6	855206	855231
1/2"	PHL-8	PFL-8	PML-8	855206	855231
3/4"	PHL-12	PFL-12	PML-12	855206	855231
1"	PHL-16	--	--	855206	855231

## GJ/MH Ground Joints - Mine Stems

### GJ Ground Joint Couplings

17



Female Hose Stem

Wing Nut

Low Profile Nut

Female Spud

Male Spud

Double Spud

Male Stem

Hose Mender

Size	Part #							
1/2"	GJS-050	GJWN-050	--	GJFS-050	GJMS-050	GJDS-050	GJM-050	GJHM-050
3/4"	GJS-075	GJWN-100	GJWN-100-LP	GJFS-075	GJMS-075	GJDS-075	GJM-075	GJHM-075
1"	GJS-100	GJWN-100	GJWN-100-LP	GJFS-100	GJMS-100	GJDS-100	GJM-100	GJHM-100
1-1/4"	GJS-125	GJWN-150	GJWN-150-LP	GJFS-125	GJMS-125	GJDS-125	GJM-125	GJHM-125
1-1/2"	GJS-150	GJWN-150	GJWN-150-LP	GJFS-150	GJMS-150	GJDS-150	GJM-150	GJHM-150
2"	GJS-200	GJWN-200	GJWN-200-LP	GJFS-200	GJMS-200	GJDS-200	GJM-200	GJHM-200
2-1/2"	GJS-250	GJWN-250	--	GJFS-250	GJMS-250	GJDS-250	GJM-250	--
3"	GJS-300	GJWN-300	GJWN-300-LP	GJFS-300	GJMS-300	GJDS-300	GJM-300	--
4"	GJS-400	GJWN-400	GJWN-400-LP	GJFS-400	--	--	GJM-400	--

### MH Mine Hose Fittings



Mining Stem

Hex Nut

Joiner

Female Spud

Size	Part #
1/2" x 1/2"	MHS-050-050
1/2" x 1"	MHS-050-100
3/4" x 1"	MHS-075-100
1" x 1"	MHS-100-100
1-1/4" x 1-1/4"	MHS-125-125
1-1/2" x 1-1/2"	MHS-150-150
2" x 2"	MHS-200-200

Size	Part #
1/2"	MHN-050
1"	MHN-100
1-1/4"	MHN-125
1-1/2"	MHN-150
2"	MHN-200

Size	Part #
1/2"	MHJ-050
3/4"	MHJ-075
1"	MHJ-100
1-1/4"	MHJ-125
1-1/2"	MHJ-150
2"	MHJ-200

Size	Male Thread	Part #
3/8"	1"	MHFS-038-100
1/2"	1"	MHFS-050-100
3/4"	1"	MHFS-075-100
1"	1"	MHFS-100-100



## B/BU Ground Joint Clamps



Hose ID	Hose OD Min	Hose OD Max	Part #
3/4"	1.19"	1.31"	BU-9
3/4"	1.31"	1.50"	B-9
1"	1.53"	1.72"	BU-14
1"	1.69"	1.94"	B-14
1-1/2"	1.81"	2.00"	BU-22
1-1/2"	2.00"	2.19"	B-22
2"	2.34"	2.53"	BU-28
2"	2.50"	2.78"	BU-29
2"	2.75"	3.06"	B-29
3"	3.50"	3.94"	BU-35
3"	3.81"	4.06"	B-35

- WARNING!**  • The bolts used in the ground joint clamps are not standard bolts. They vary from standard bolts in their length, diameter, overall thread length and material hardness. These bolts can be retorqued, but it is not recommended that the bolts or clamps are reused, as they are designed for a single bend only. We recommend using only factory supplied replacement bolts.
- The use of lubricant on bolts will adversely affect clamp performance. Do not lubricate nuts and bolts.



18

## BL Bauer - Type B

Female Socket x Machine Shank



Part #	Size
BLSS-400*	4"
BLSS-600*	6"
BLSS-800*	8"
BLSS-1000	10"
BLSS-1200	12"

\* Barb is Uber / KC Style

Male Ball x Machine Shank



Part #	Size
BLBS-400*	4"
BLBS-600*	6"
BLBS-800*	8"
BLBS-1000	10"
BLBS-1200	12"

\* Barb is Uber / KC Style

Female Socket x Shank  
(Genuine Bauer)



Part #	Size
BLSS-300-HK	3"
BLSS-400-HK	4"
BLSS-600-HK	6"
BLSS-800-HK	8"
BLSS-1000-HK	10"
BLSS-1200-HK	12"

Male Ball x Shank  
(Genuine Bauer)



Part #	Size
BLBS-300-HK	3"
BLBS-400-HK	4"
BLBS-600-HK	6"
BLBS-800-HK	8"
BLBS-1000-HK	10"
BLBS-1200-HK	12"

Female Socket x Ansi Flange



Part #	Size
BLSFL-400	4"
BLSFL-600	6"
BLSFL-800	8"
BLSFL-1000	10"
BLSFL-1200	12"

Male Ball x Ansi Flange



Part #	Size
BLBFL-400	4"
BLBFL-600	6"
BLBFL-800	8"
BLBFL-1000	10"
BLBFL-1200	12"

Female Socket x Ansi Flange Reducers



Part #	Size
BLRFLS-600400	6" Flange x 4" Socket
BLRFLS-800600	8" Flange x 6" Socket
BLRFLS-1200800	12" Flange x 8" Socket

Male Ball x Ansi Flange Reducers



Part #	Size
BLRFLB-600400	6" Flange x 4" Ball
BLRFLB-800600	8" Flange x 6" Ball
BLRFLB-1200800	12" Flange x 8" Ball





## BL Bauer - Type B

### Female Socket x Male NPT



Part #	Size
	3"
	4"
	6"
	8"

### Male Ball x Male NPT



Part #	Size
BLBM-300	3"
BLBM-400	4"
BLBM-600	6"
BLBM-800	8"

### Inline T with Male Branch



Part #	Size
BLTMB-400	4"
BLTMB-600	6"
BLTMB-800	8"

### Inline T with Female Branch



Part #	Size
BLTFB-400	4"
BLTFB-600	6"
BLTFB-800	8"

### Male Ball x Female Socket 45°



Part #	Size
BLEL45-400	4"
BLEL45-600	6"
BLEL45-800	8"
BLEL45-1000	10"
BLEL45-1200	12"

### Male Ball x Female Socket 90°



Part #	Size
BLEL90-400	4"
BLEL90-600	6"
BLEL90-800	8"
BLEL90-1000	10"
BLEL90-1200	12"

### Double Male Ball - Y



Part #	Size
BLYDBS-400	4"
BLYDBS-600	6"
BLYDBS-800	8"
BLYDBS-1000	10"
BLYDBS-1200	12"

### Double Female Socket - Y



Part #	Size
BLYDSB-400	4"
BLYDSB-600	6"
BLYDSB-800	8"
BLYDSB-1000	10"
BLYDSB-1200	12"

### Female Socket x Male Ball Reducer



Part #	Size
BLRSB-600400	6" x 4"
BLRSB-800600	8" x 6"
BLRSB-1000800	10" x 8"
BLRSB-12001000	12" x 10"

### Female Socket x Male Ball Increaser



Part #	Size
BLISB-600400	6" x 4"
BLISB-800600	8" x 6"
BLISB-1000800	10" x 8"
BLISB-12001000	12" x 10"



18

## BL Bauer - Type B

Female Socket x Machine Shank



Part #	Size
BLL-300	3"
BLL-400	4"
BLL-600	6"
BLL-800	8"
BLL-1000	10"
BLL-1200	12"

Bauer O-Ring



Part #	Size
BLG-300	3"
BLG-400	4"
BLG-600	6"
BLG-800	8"
BLG-1000	10"
BLG-1200	12"

Female End Cap



Part #	Size
BLEC-400	4"
BLEC-600	6"
BLEC-800	8"
BLEC-1000	10"
BLEC-1200	12"

Male End Plug



Part #	Size
BLEP-400	4"
BLEP-600	6"
BLEP-800	8"
BLEP-1000	10"
BLEP-1200	12"

Male Ball x Round Hole Strainer



Part #	Size
BLMS-400	4"
BLMS-600	6"
BLMS-800	8"
BLMS-1000	10"
BLMS-1200	12"

Male Ball x Sewer Screen



Part #	Size
BLMSCR-800	8"
BLMSCR-1000	10"
BLMSCR-1200	12"





## BLA Bauer - Type A



Female Socket x Shank

Part #	Size
BLSS-1000-A	10"
BLSS-1200-A	12"



Male Ball x Shank

Part #	Size
BLBS-1000-A	10"
BLBS-1200-A	12"



Female Socket x ANSI Flange

Part #	Size
BLSFL-1000-A	10"
BLSFL-1200-A	12"



Male Ball x ANSI Flange

Part #	Size
BLBFL-1000-A	10"
BLBFL-1200-A	12"



Male Ball x Female Socket 45°

Part #	Size
BLEL45-1000-A	10"
BLEL45-1200-A	12"



Male Ball x Female Socket 90°

Part #	Size
BLEL90-1000-A	10"
BLEL90-1200-A	12"



Female End Cap

Part #	Size
BLEC-1000-A	10"
BLEC-1200-A	12"



Bauer O-Ring

Part #	Size
BLG-1000-A	10"
BLG-1200-A	12"



Male End Plug

Part #	Size
BLEP1000-A	10"
BLEP1200-A	12"

## Brass Pipe Fittings Pictorial Index

<p><b>D48</b> SAE 45° MALE x MALE NPT</p>  <p>Page 122</p>	<p><b>D49</b> SAE 45° M x 90° M NPT</p>  <p>Page 122</p>	<p><b>D54</b> SAE 45° M x M NPT</p>  <p>Page 122</p>	<p><b>D99</b> MALE ELBOW</p>  <p>Page 122</p>	<p><b>D100</b> FEMALE ELBOW</p>  <p>Page 122</p>	<p><b>D101</b> Female Tee</p>  <p>Page 122</p>
<p><b>D102</b> Cross</p>  <p>Page 122</p>	<p><b>D103</b> Straight Coupling</p>  <p>Page 122</p>	<p><b>D104</b> UNION COUPLING</p>  <p>Page 123</p>	<p><b>D108</b> FEMALE CAP</p>  <p>Page 123</p>	<p><b>D109</b> SQUARE HEAD PLUG</p>  <p>Page 123</p>	<p><b>D110</b> BUSHING</p>  <p>Page 123</p>
<p><b>D112</b> CLOSE NIPPLE</p>  <p>Page 123</p>	<p><b>D113</b> LONG NIPPLE</p>  <p>Page 123</p>	<p><b>D116</b> STREET ELBOW</p>  <p>Page 123</p>	<p><b>D119</b> REDUCING COUPLING</p>  <p>Page 123</p>	<p><b>D120</b> REDUCING ADAPTER</p>  <p>Page 124</p>	<p><b>D121</b> HEX PLUG</p>  <p>Page 124</p>
<p><b>D122</b> HEX NIPPLE</p>  <p>Page 124</p>	<p><b>D125</b> HOSE BARB x MALE NPT</p>  <p>Page 124</p>	<p><b>D126</b> HOSE BARB x RIGID FEMALE NPT</p>  <p>Page 124</p>	<p><b>D128</b> HOSE BARB x FEMALE SAE</p>  <p>Page 124</p>	<p><b>D129</b> HOSE MENDER</p>  <p>Page 125</p>	<p><b>D131</b> HOSE BARB x FEMALE BALL SWIVEL</p>  <p>Page 125</p>
<p><b>D139</b> Hose Barb x Male NPT</p>  <p>Page 315</p>	<p><b>D140</b> Hose Barb x Male NPT</p>  <p>Page 125</p>	<p><b>D159</b> Hose Barb x Male Swivel</p>  <p>Page 125</p>	<p><b>DX100</b> Female Elbow</p>  <p>Page 122</p>	<p><b>DX101</b> Female Tee</p>  <p>Page 122</p>	<p><b>DX115</b> STREET ELBOW</p>  <p>Page 123</p>
<p><b>DX124</b> STREET ELBOW</p>  <p>Page 124</p>	<p><b>DM101</b> Male Tee</p>  <p>Page 122</p>				

## D Brass Fittings

### SAE 45° Male x Male NPT

Part #	Male SAE	Male NPT
D48-6A	-6	1/8"
D48-6B	-6	1/4"
D48-6C	-6	3/8"
D48-6D	-6	1/2"
D48-6E	-6	3/4"
D48-10C	-10	3/8"
D48-10D	-10	1/2"
D48-10E	-10	3/4"
D48-12D	-12	1/2"
D48-12E	-12	3/4"



### SAE 45° MALE X 90° MALE NPT

Part #	Male SAE	Male NPT
D49-6B	-6	1/4"
D49-6C	-6	3/8"
D49-6D	-6	1/2"
D49-6E	-6	3/4"
D49-8B	-8	1/4"
D49-8C	-8	3/8"
D49-8D	-8	1/2"
D49-10C	-10	3/8"
D49-10D	-10	1/2"
D49-12D	-12	1/2"
D49-12E	-12	3/4"

### SAE 45° Male X 45° Male NPT

Part #	Male SAE	Male NPT
D54-6B	-6	1/4"
D54-6C	-6	3/8"
D54-8C	-8	3/8"
D54-8D	-8	1/2"



### 90° Male Elbow

Part #	Size
D99-A	1/8"
D99-B	1/4"
D99-C	3/8"
D99-D	1/2"

### 90° Female Elbow

Part #	Size
D100-A	1/8"
D100-B	1/4"
D100-C	3/8"
D100-D	1/2"
D100-E	3/4"
<hr/>	
DX100-A	1/8"
DX100-B	1/4"
DX100-C	3/8"
DX100-D	1/2"



### Female Tee

Part #	Size
D101-A	1/8"
D101-B	1/4"
D101-C	3/8"
D101-D	1/2"
D101-E	3/4"
<hr/>	
DX101-A	1/8"
DX101-B	1/4"
DX101-C	3/8"
DX101-D	1/2"

### Cross

Part #	Size
D102-A	1/8"
D102-B	1/4"
D102-C	3/8"
D102-D	1/2"



### Male Tee

Part #	Size
DM101-A	1/8"
DM101-B	1/4"
DM101-C	3/8"
DM101-D	1/2"
DM101-E	3/4"

### Straight Coupling

Part #	Size
D103-A	1/8"
D103-B	1/4"
D103-C	3/8"
D103-D	1/2"
D103-E	3/4"





### Union Coupling



D104

Part #	Size
D104-A	1/4"
D104-B	3/8"
D104-C	1/2"

### Square Head Plug



D109

Part #	Male Thread
D109-A	1/8"
D109-B	1/4"
D109-C	3/8"
D109-D	1/2"
D109-E	3/4"

### Close Nipple



D112

Part #	Thread Size	Length
D112-A	1/8"	Close
D112-B	1/4"	Close
D112-C	3/8"	Close
D112-D	1/2"	Close
D112-E	3/4"	Close

### Long Nipple



D113

Part #	Thread Size	Length
D113-2X1.5	1/8"	1-1/2"
D113-2X2	1/8"	2"
D113-2X2.5	1/8"	2-1/2"
D113-2X3	1/8"	3"
D113-2X3.5	1/8"	3-1/2"
D113-2X4	1/8"	4"
D113-4X1.5	1/4"	1-1/2"
D113-4X2	1/4"	2"
D113-4X2.5	1/4"	2-1/2"
D113-4X3	1/4"	3"
D113-4X3.5	1/4"	3-1/2"
D113-4X4	1/4"	4"
D113-6X1.5	3/8"	1-1/2"
D113-6X2	3/8"	2"
D113-6X2.5	3/8"	2-1/2"
D113-6X3	3/8"	3"
D113-6X3.5	3/8"	3-1/2"
D113-6X4	3/8"	4"
D113-8X1.5	1/2"	1-1/2"
D113-8X2	1/2"	2"
D113-8X2.5	1/2"	2-1/2"
D113-8X3	1/2"	3"
D113-8X3.5	1/2"	3-1/2"
D113-8X4	1/2"	4"
D113-12X1.5	3/4"	1-1/2"
D113-12X2	3/4"	2"
D113-12X3	3/4"	3"

### Female Cap



D108

Part #	Female Thread
D108-A	1/8"
D108-B	1/4"
D108-C	3/8"
D108-D	1/2"
D108-E	3/4"

### Bushing



D110

Part #	Male SAE	Male NPT
D110-BA	1/4"	1/8"
D110-CA	3/8"	1/8"
D110-CB	3/8"	1/4"
D110-DA	1/2"	1/8"
D110-DB	1/2"	1/4"
D110-DC	1/2"	3/8"
D110-EA	3/4"	1/8"
D110-EB	3/4"	1/4"
D110-EC	3/4"	3/8"
D110-ED	3/4"	1/2"
D110-FB	1"	1/4"
D110-FC	1"	3/8"
D110-FD	1"	1/2"
D110-FE	1"	3/4"

### 90° Street Elbow



DX115

Part #	Female Thread	Male Thread
DX115-A	1/8"	1/8"
DX115-BA	1/4"	1/8"
DX115-B	1/4"	1/4"
DX115-CB	3/8"	1/4"
DX115-C	3/8"	3/8"
DX115-DC	1/2"	3/8"
DX115-D	1/2"	1/2"
DX115-E	3/4"	3/4"

### 90° Street Elbow



D116

Part #	Female Thread	Male Thread
D116-A	1/8"	1/8"
D116-B	1/4"	1/4"
D116-C	3/8"	3/8"
D116-D	1/2"	1/2"
D116-E	3/4"	3/4"
D48-12E	-12	3/4"

### Reducing Coupling



D119

Part #	Female Thread	Female Thread
D119-BA	1/4"	1/8"
D119-CA	3/8"	1/8"
D119-CB	3/8"	1/4"
D119-DB	1/2"	1/4"
D119-DC	1/2"	3/8"
D119-ED	3/4"	1/2"
D48-12E	-12	3/4"





### Reducing Adapter



D120

Part #	Female Thread	Male Thread
D120-BA	1/4"	1/8"
D120-CA	3/8"	1/8"
D120-CB	3/8"	1/4"
D120-DB	1/2"	1/4"
D120-DC	1/2"	3/8"
D120-ED	3/4"	1/2"
D48-12E	-12	3/4"

### Hex Plug



D121

Part #	Male Thread
D121-A	1/8"
D121-B	1/4"
D121-C	3/8"
D121-D	1/2"
D121-E	3/4"
D121-F	1"

### Hex Nipples



D122

Part #	Male Thread	Male Thread
D122-AA	1/8"	1/8"
D122-BA	1/4"	1/8"
D122-BB	1/4"	1/4"
D122-CA	3/8"	1/8"
D122-CB	3/8"	1/4"
D122-CC	3/8"	3/8"
D122-DB	1/2"	1/4"
D122-DC	1/2"	3/8"
D122-DD	1/2"	1/2"
D122-ED	3/4"	1/2"
D122-EE	3/4"	3/4"
D122-FF	1"	1"
D110-FE	1"	3/4"

### 45° Street Elbow



DX124

Part #	Size
DX100-A	1/8"
DX100-B	1/4"
DX100-C	3/8"
DX100-D	1/2"

### Hose Barb x Male NPT



D126

### Hose Barb x Rigid Female NPT

Part #	Hose ID	Female Thread
D126-4B	1/4"	1/4"
D126-4C	1/4"	3/8"
D126-6A	3/8"	1/8"
D126-6B	3/8"	1/4"
D126-6C	3/8"	3/8"
D126-8B	1/2"	1/4"
D126-8C	1/2"	3/8"
D126-8D	1/2"	1/2"



D125

Part #	Hose ID	Male Thread
D125-2A	1/8"	1/8"
D125-2B	1/8"	1/4"
D125-3A	3/16"	1/8"
D125-3B	3/16"	1/4"
D125-4A	1/4"	1/8"
D125-4B	1/4"	1/4"
D125-4C	1/4"	3/8"
D125-4D	1/4"	1/2"
D125-5A	5/16"	1/8"
D125-5B	5/16"	1/4"
D125-5C	5/16"	3/8"
D125-6A	3/8"	1/8"
D125-6B	3/8"	1/4"
D125-6C	3/8"	3/8"
D125-6D	3/8"	1/2"
D125-8B	1/2"	1/4"
D125-8C	1/2"	3/8"
D125-8D	1/2"	1/2"
D125-8E	1/2"	3/4"
D125-10B	5/8"	1/4"
D125-10C	5/8"	3/8"
D125-10D	5/8"	1/2"
D125-10E	5/8"	3/4"
D125-12D	3/4"	1/2"
D125-12E	3/4"	3/4"
D125-12F	3/4"	1"
D125-16E	1"	3/4"
D125-16F	1"	1"

### Hose Barb x Female SAE 45°



D128

Part #	Hose ID	Female Thread
D128-4x4	1/4"	7/16-20"
D128-4x6	1/4"	5/8-18"
D128-6x6	3/8"	5/8-18"
D128-8x8	1/2"	3/4-16"



19



D129

### Hose Mender

Part #	Hose ID
D129-2	1/8"
D129-3	3/16"
D129-4	1/4"
D129-5	5/16"
D129-6	3/8"
D129-8	1/2"
D129-12	3/4"



D131

### Hose Barb x Female NPSM (Ball) Swivel

Part #	Male Thread	Male Thread
D131-2A	1/8"	1/8"
D131-3A	3/16"	1/8"
D131-3B	3/16"	1/4"
D131-4A	1/4"	1/8"
D131-4B	1/4"	1/4"
D131-4C	1/4"	3/8"
D131-5B	5/16"	1/4"
D131-6B	3/8"	1/4"
D131-6C	3/8"	3/8"
D131-6D	3/8"	1/2"
D131-8C	1/2"	3/8"
D131-8D	1/2"	1/2"
D131-12E	3/4"	3/4"

### Hose Barb X 90° Male NPT



D139

Part #	Hose ID	Male Thread
D139-4A	1/4"	1/8"
D139-4B	1/4"	1/4"
D139-6A	3/8"	1/8"
D139-6B	3/8"	1/4"
D139-6C	3/8"	3/8"
D139-8D	1/2"	1/2"



D140

### Hose Barb X 45° Male NPT

Part #	Hose ID	Male Thread
D140-4A	1/4"	1/8"
D140-4B	1/4"	1/4"
D140-6A	3/8"	1/8"
D140-6B	3/8"	1/4"
D140-6C	3/8"	3/8"

### Hose Barb x Male Swivel



D159

Part #	Female Thread
D159-4B	1/4"
D159-6B	1/4"
D159-6C	3/8"
D159-8D	1/2"
D159-12E	3/4"
D159-16F	1"



## B Garden Hose Fittings

GHT Female Hose End



Part #	Hose ID	Male Thread
BCM-73	3/8"	GHT
BCM-74	1/2"	GHT
BCM-75	5/8"	GHT
BCM-76	3/4"	GHT
BCM-78	1"	NPSM

Male GHT x Male GHT



Part #	Threads
BA-777	GHT x GHT

19

GHT Female Hose End



Part #	Hose ID	Female Thread
BCF-73	3/8"	GHT
BCF-74	1/2"	GHT
BCF-75	5/8"	GHT
BCF-76	3/4"	GHT
BCF-78	1"	NPSM

Male GHT x Male NPT



Part #	Female Thread
BA-73	GHT x 3/8" NPT
BA-74	GHT x 1/2" NPT
BA-776	GHT x 3/4" NPT
BA-78	GHT X 1" NPSM

Red Vinyl Washer



Part #
TVW-7

Female NPT x Male GHT



Part #	Threads
BA-794	1/2" NPT x GHT
BA-796	3/4" NPT x GHT

Female GHT x Female GHT Swivel



Part #	Threads
BA-977	GHT x GHT

Female NPT x Male GHT



Part #	Threads
BAS-974	GHT x 1/2" NPT
BAS-976	GHT x 3/4" NPT

Garden Hose Nozzle



Part #	Threads
SN75	GHT

## PL Push-Lok Brass Fittings

19

MP - NPT Male



Part #	Hose Bore	Thread
	in	
PL04-02MP	1/4"	1/8-27
PL04-04MP	1/4"	1/4-18
PL04-06MP	1/4"	3/8-18
PL05-02MP	5/16"	1/8-27
PL05-04MP	5/16"	1/4-18
PL06-02MP	3/8"	1/8-27
PL06-04MP	3/8"	1/4-18
PL06-06MP	3/8"	3/8-18
PL06-08MP	3/8"	1/2-14
PL08-04MP	1/2"	1/4-18
PL08-06MP	1/2"	3/8-18
PL08-08MP	1/2"	1/2-14
PL08-12MP	1/2"	3/4-14
PL10-08MP	5/8"	1/2-14
PL10-12MP	5/8"	3/4-14
PL12-08MP	3/4"	1/2-14
PL12-12MP	3/4"	3/4-14
PL16-16MP	1"	1-11-1/2
D113-12X2	3/4"	2"
D113-12X3	3/4"	3"

FJ - JIC 37° Female Swivel



Part #	Hose Bore	Thread
	in	
PL04-04FJ	1/4"	7/16-20
PL04-05FJ	1/4"	1/2-20
PL05-05FJ	5/16"	1/2-20
PL06-06FJ	3/8"	9/16-18
PL06-08FJ	3/8"	3/4-16
PL08-08FJ	1/2"	3/4-16
PL08-10FJ	1/2"	7/8-14
PL10-10FJ	5/8"	7/8-14
PL12-12FJ	3/4"	1-1/16-12
PL16-16FJ	1"	1-5/16-12

FPX - NPT Female Swivel



Part #	Hose Bore	Thread
	in	
PL04-04FPX	1/4"	1/4-18
PL06-06FPX	3/8"	3/8-18
PL08-08FPX	1/2"	1/2-14

MJ - JIC 37° Male



Part #	Hose Bore	Thread
	in	
PL04-04MJ	1/4"	7/16-20
PL04-05MJ	1/4"	1/2-20
PL05-05MJ	5/16"	1/2-20
PL06-06MJ	3/8"	9/16-18
PL08-08MJ	1/2"	3/4-16
PL12-12MJ	3/4"	1-1/16-12

FP - NPT Female Solid



Part #	Hose Bore	Thread
	in	
PL04-04FP	1/4"	1/4-18
PL06-06FP	3/8"	3/8-18
PL08-08FP	1/2"	1/2-14



## PL Push-Lok Brass Fittings



FA - SAE 45° Female Swivel

Part #	Hose Bore	Thread
	in	
PL06-06FA	3/8"	5/8-18
PL12-12FA	3/4"	1-1/16-14



FIX - SAE Inverted Flare Female Rigid

Part #	Hose Bore	Thread
	in	
PL04-03FIX	1/4"	3/8-24
PL04-04FIX	1/4"	7/16-24
PL04-05FIX	1/4"	1/2-20
PL06-06FIX	3/8"	5/8-18
PL08-08FIX	1/2"	3/4-18



MA - SAE 45° Male

Part #	Hose Bore	Thread
	in	
PL06-06MA	3/8"	5/8-18



MIX - SAE Inverted Flare Male Swivel

Part #	Hose Bore	Thread
	in	
PL04-03MIX	1/4"	3/8-24
PL04-04MIX	1/4"	7/16-24
PL04-05MIX	1/4"	1/2-20
PL06-06MIX	3/8"	5/8-18
PL08-08MIX	1/2"	3/4-18



HM - Hose Mender

Part #	Hose Bore	Thread
	in	
PL04-04HM	1/4"	7/16-20
PL05-05HM	5/16"	1/2-20
PL06-06HM	3/8"	1/2-20
PL08-08HM	1/2"	9/16-18
PL10-10HM	5/8"	3/4-16
PL12-12HM	3/4"	3/4-16

## PC Push-To-Connect D.O.T. Air Brake Fittings - Tubing

19

### Tube Insert



Part #	Tube
PC1400-4	1/4"
PC1400-6	3/8"
PC1400-8	1/2"



### Connector Tube to Male Pipe

Part #	Tube	M-NPT
PC1468-8C	1/2"	3/8"
PC1468-8D	1/2"	1/2"
PC1468-10C	5/8"	3/8"
PC1468-10D	5/8"	1/2"
PC1468-12D	3/4"	1/2"
PC1468-12E	3/4"	3/4"

### Union Coupling



Part #	Tube
PC1462-4	1/4"
PC1462-6	3/8"
PC1462-8	1/2"
PC1462-10	5/8"
PC1462-12	3/4"

### 90° Elbow Tube to Tube



Part #	Tube
PC1465-4	1/4"
PC1465-6	3/8"
PC1465-8	1/2"



### 90° Elbow Tube to Male Pipe

Part #	Tube	M-NPT
PC1469-4A	1/4"	1/8"
PC1469-4B	1/4"	1/4"
PC1469-4C	1/4"	3/8"
PC1469-6A	3/8"	1/8"
PC1469-6B	3/8"	1/4"
PC1469-6C	3/8"	3/8"
PC1469-6D	3/8"	1/2"
PC1469-8B	1/2"	1/4"
PC1469-8C	1/2"	3/8"
PC1469-8D	1/2"	1/2"
PC1469-10C	5/8"	3/8"
PC1469-10D	5/8"	1/2"
PC1469-12D	3/4"	1/2"
PC1469-12E	3/4"	3/4"

### Connector Tube to Female Pipe



Part #	Tube	F-NPT
PC1466-4A	1/4"	1/8"
PC1466-4B	1/4"	1/4"
PC1466-6B	3/8"	1/4"
PC1466-6C	3/8"	3/8"
PC1466-8C	1/2"	3/8"
PC1466-8D	1/2"	1/2"

### Connector Tube to Male Pipe



Part #	Tube	M-NPT
PC1468-4A	1/4"	1/8"
PC1468-4B	1/4"	1/4"
PC1468-4C	1/4"	3/8"
PC1468-6A	3/8"	1/8"
PC1468-6B	3/8"	1/4"
PC1468-6C	3/8"	3/8"
PC1468-6D	3/8"	1/2"
PC1468-8B	1/2"	1/4"



### 90° Elbow Tube to Male Pipe Swivel

Part #	Tube	M-NPT
PC1469SW-4A	1/4"	1/8"
PC1469SW-4B	1/4"	1/4"
PC1469SW-4C	1/4"	3/8"
PC1469SW-6A	3/8"	1/8"
PC1469SW-6B	3/8"	1/4"
PC1469SW-6C	3/8"	3/8"
PC1469SW-6D	3/8"	1/2"
PC1469SW-8B	1/2"	1/4"
PC1469SW-8C	1/2"	3/8"
PC1469SW-8D	1/2"	1/2"
PC1469SW-10C	5/8"	3/8"
PC1469SW-10D	5/8"	1/2"
PC1469SW-12D	3/4"	1/2"
PC1469SW-12E	3/4"	3/4"

## D.O.T. Air Brake Coupling - Hose



**Coupler Assembly with Spring Guard  
(Nut, Sleeve, Coupler & Spring)**

Part #	Hose ID	M-NPT
D1493-6B	3/8"	1/4"
D1493-6C	1/2"	3/8"
D1493-6D	3/8"	1/2"
D1493-8C	1/2"	3/8"
D1493-8D	1/2"	1/2"



**Swivel Coupler Assembly with Spring  
Guard (Nut, Sleeve, Coupler, & Spring)**

Part #	Hose ID	M-NPT
D1493SW-6	3/8"	--
D1493SW-8	1/2"	--
D1493SW-6B*	3/8"	1/4"
D1493SW-6C*	3/8"	3/8"
D1493SW-8C*	1/2"	3/8"

19



**Terminal Bolt**

Part #	Pipe	Material	Length
D1497-DB	1/2" M x 3/8" F	Steel	2-3/4"
D1497-DBS	1/2" M x 3/8" F	Brass	1-5/8"



**3/8" Quick Fix Repair Kit (Bulk)**

Part #	Description	Pkg.
431402-100	3/8" NPTF Quick-Fix Kit	Clamshell



**Terminal Bolt (Steel)**

Part #	Pipe	Length
D1496-DC	1/2" M x 3/8" F	2"

- » Each Pack Will Repair Two Damaged 3/8" Rubber Air Brake Lines
- » Quick-Fix Makes Field Repairs Easy, Reducing Downtime
- » Meets DOT 106 & SAE J1402 Requirements
- » Clamshell Pack Features Pre-Sealed Threads & Includes an Installation Tool (5/16" Hex Key)
- » Designed & Made in the USA!



**Terminal Bolt (Brass)**

Part #	Hose ID	M-NPT
D1495B-A	1/8" x 1/8"	1-1/2"
D1495B-C	3/8" x 3/8"	1-1/4"
D1495B-D	1/2" x 1/2"	1-1/2"
D1495B-L	1/4" x 1/4"	1-1/2"
D1495B-S	1/4" x 1/4"	31/32"

\* Complete with 4134 series adapter.

## D.O.T. Air Brake Coupling - Hose

19



Sleeve

Part #	Hose ID
D1490-6	3/8"
D1490-8	1/2"



Swivel Coupler Assembly  
(Nut, Sleeve, And Coupler)

Part #	Hose ID	M-NPT
D1492SW-6	3/8"	--
D1492SW-8	1/2"	--
D1492SW-6B*	3/8"	1/4"
D1492SW-6C*	3/8"	3/8"
D1492SW-6D*	3/8"	1/2"
D1492SW-8C*	1/2"	3/8"

\* Complete with 4134 series adapter.



Nut

Part #	Hose ID
D1491-6	3/8"
D1491-8	1/2"



Hose Connector For HAB  
Assemblies

Part #	Straight Thread	M-NPT
D4134-6B	3/4"-20	1/4"
D4134-6C	3/4"-20	3/8"
D4134-6D	3/4"-20	1/2"
D4134-8C	3/4"-20	3/8"
D4134-8D	3/4"-20	1/2"
D4134-8C-WH	7/8"-20	3/8"
D4134-8D-WH	7/8"-20	1/2"



Coupler Assembly (Nut, Sleeve, And Coupler)

Part #	Hose ID	M-NPT
D4134-6B	3/4"-20	1/4"
D4134-6C	3/4"-20	3/8"
D4134-6D	3/4"-20	1/2"
D4134-8C	3/4"-20	3/8"
D4134-8D	3/4"-20	1/2"



Hose Splicer

Part #	Hose ID
D1492-6S	3/8"
D1492-8S	1/2"

## Bush Hogs



**Bush Hog Female**

Part #	Size
BHF-400	4"
BHF-600	6"
BHF-800	8"



**Bush Hog Male**

Part #	Size
BHM-400	4"
BHM-600	6"
BHM-800	8"

20



**Bush Hog Clamp**

Part #	Size
BHC-400	4"
BHC-600	6"
BHC-800	8"



**Bush Hog Gasket**

Part #	Size
BHG-400	4"
BHG-600	6"
BHG-800	8"



**Bush Hog 45**

Part #	Size
BH45-400	4"
BH45-600	6"
BH45-800	8"



**Bush Hog 90**

Part #	Size
BH90-400	4"
BH90-600	6"
BH90-800	8"



**Bush Hog Reducer**

Part #	Size
BHR-400300	4" - 3"
BHR-600400	6" - 4"
BHR-800600	8" - 6"



**Bush Hog Y**

Part #	Size
BHY-400	4"
BHY-600	6"
BHY-800	8"



**Bush Hog End Cap**

Part #	Size
BHEC-400	4"
BHEC-600	6"
BHEC-800	8"



**Bush Hog End Plug**

Part #	Size
BHEP-400	4"
BHEP-600	6"
BHEP-800	8"

## A/B/C Standard Camlocks

### PART A Male Camlock x Female Thread

21



Size	Aluminum	Stainless	Brass	Polypropylene
3/4"	AL-A075	SS-A075	BR-A075	PP-A075
1"	AL-A100	SS-A100	BR-A100	PP-A100
1-1/4"	AL-A125	SS-A125	BR-A125	PP-A125 *
1-1/2"	AL-A150	SS-A150	BR-A150	PP-A150
2"	AL-A200	SS-A200	BR-A200	PP-A200
2-1/2"	AL-A250	SS-A250	BR-A250	--
3"	AL-A300	SS-A300	BR-A300	PP-A300
4"	AL-A400	SS-A400	BR-A400	PP-A400
5"	AL-A500	--	--	--
6"	AL-A600	SS-A600	--	--
8"	AL-A800-1	--	--	--
8"	AL-A800-2	--	--	--

\* 1-1/4" thread x 1-1/2" camlock

3/4" - 6" camlocks interchange with Mil Spec A-A59326A.

#### 8" Camlocks

**Type 1:** PT Domestic, Dixon Global, Campbell, Kuri Import (Standard)

**Type 2:** Dixon Domestic, PT Import, Kuri HD801, Neco

### PART B Female Camlock x Male Thread



Size	Aluminum	Stainless	Brass	Polypropylene
3/4"	AL-B075	SS-B075	BR-B075	PP-B075
1"	AL-B100	SS-B100	BR-B100	PP-B100
1-1/4"	AL-B125	SS-B125	BR-B125	PP-B125 *
1-1/2"	AL-B150	SS-B150	BR-B150	PP-B150
2"	AL-B200	SS-B200	BR-B200	PP-B200
2-1/2"	AL-B250	SS-B250	BR-B250	--
3"	AL-B300	SS-B300	BR-B300	PP-B300
4"	AL-B400	SS-B400	BR-B400	--
5"	AL-B500	--	--	--
6"	AL-B600	SS-B600	--	--
8"	AL-B800-1	--	--	--
8"	AL-B800-2	--	--	--

\* 1-1/4" thread x 1-1/2" camlock

3/4" - 6" camlocks interchange with Mil Spec A-A59326A.

#### 8" Camlocks

**Type 1:** PT Domestic, Dixon Global, Campbell, Kuri Import (Standard)

**Type 2:** Dixon Domestic, PT Import, Kuri HD801, Neco

## PART C Female Camlock x Hose Shank



Size	Aluminum	Stainless	Brass	Polypropylene
3/4"	AL-C075	SS-C075	BR-C075	PP-C075
1"	AL-C100	SS-C100	BR-C100	PP-C100
1-1/4"	AL-C125	SS-C125	BR-C125	PP-C125 *
1-1/2"	AL-C150	SS-C150	BR-C150	PP-C150
2"	AL-C200	SS-C200	BR-C200	PP-C200
2-1/2"	AL-C250	SS-C250	BR-C250	--
3"	AL-C300	SS-C300	BR-C300	PP-C300
4"	AL-C400	SS-C400	BR-C400	PP-C400
5"	AL-C500	--	--	--
6"	AL-C600	SS-C600	--	--
8"	AL-C800-1	--	--	--
8"	AL-C800-2	--	--	--

\* 1-1/4" barb x 1-1/2" camlock

3/4" - 6" camlocks interchange with Mil Spec A-A59326A.

### 8" Camlocks

**Type 1:** PT Domestic, Dixon Global, Campbell, Kuri Import (Standard)

**Type 2:** Dixon Domestic, PT Import, Kuri HD801, Neco

## PART D Female Camlock x Female Thread



Size	Aluminum	Stainless	Brass	Polypropylene
3/4"	AL-D075	SS-D075	BR-D075	PP-D075
1"	AL-D100	SS-D100	BR-D100	PP-D100
1-1/4"	AL-D125	SS-D125	BR-D125	PP-D125 *
1-1/2"	AL-D150	SS-D150	BR-D150	PP-D150
2"	AL-D200	SS-D200	BR-D200	PP-D200
2-1/2"	AL-D250	SS-D250	BR-D250	--
3"	AL-D300	SS-D300	BR-D300	PP-D300
4"	AL-D400	SS-D400	BR-D400	PP-D400
5"	AL-D500	--	--	--
6"	AL-D600	SS-D600	--	--
8"	AL-D800-1	--	--	--
8"	AL-D800-2	--	--	--

\* 1-1/4" thread x 1-1/2" camlock

3/4" - 6" camlocks interchange with Mil Spec A-A59326A.

### 8" Camlocks

**Type 1:** PT Domestic, Dixon Global, Campbell, Kuri Import (Standard)

**Type 2:** Dixon Domestic, PT Import, Kuri HD801, Neco

## PART E Male Camlock x Hose Shank

21



Size	Aluminum	Stainless	Brass	Polypropylene
3/4"	AL-E075	SS-E075	BR-E075	PP-E075
1"	AL-E100	SS-E100	BR-E100	PP-E100
1-1/4"	AL-E125	SS-E125	BR-E125	PP-E125 *
1-1/2"	AL-E150	SS-E150	BR-E150	PP-E150
2"	AL-E200	SS-E200	BR-E200	PP-E200
2-1/2"	AL-E250	SS-E250	BR-E250	--
3"	AL-E300	SS-E300	BR-E300	PP-E300
4"	AL-E400	SS-E400	BR-E400	PP-E400
5"	AL-E500	--	--	--
6"	AL-E600	SS-E600	--	--
8"	AL-E800-1	--	--	--
8"	AL-E800-2	--	--	--

\* 1-1/4" barb x 1-1/2" camlock

3/4" - 6" camlocks interchange with Mil Spec A-A59326A.

### 8" Camlocks

**Type 1:** PT Domestic, Dixon Global, Campbell, Kuri Import (Standard)

**Type 2:** Dixon Domestic, PT Import, Kuri HD801, Neco

## PART F Male Camlock x Male Thread



Size	Aluminum	Stainless	Brass	Polypropylene
3/4"	AL-F075	SS-F075	BR-F075	PP-F075
1"	AL-F100	SS-F100	BR-F100	PP-F100
1-1/4"	AL-F125	SS-F125	BR-F125	PP-F125 *
1-1/2"	AL-F150	SS-F150	BR-F150	PP-F150
2"	AL-F200	SS-F200	BR-F200	PP-F200
2-1/2"	AL-F250	SS-F250	BR-F250	--
3"	AL-F300	SS-F300	BR-F300	PP-F300
4"	AL-F400	SS-F400	BR-F400	PP-F400
5"	AL-F500	--	--	--
6"	AL-F600	SS-F600	--	--
8"	AL-F800-1	--	--	--
8"	AL-F800-2	--	--	--

\* 1-1/4" thread x 1-1/2" camlock

3/4" - 6" camlocks interchange with Mil Spec A-A59326A.

### 8" Camlocks

**Type 1:** PT Domestic, Dixon Global, Campbell, Kuri Import (Standard)

**Type 2:** Dixon Domestic, PT Import, Kuri HD801, Neco

## PART DP Dust Plug



Size	Aluminum	Stainless	Brass	Polypropylene
3/4"	AL-DP075	SS-DP075	BR-DP075	PP-DP075
1"	AL-DP100	SS-DP100	BR-DP100	PP-DP100
1-1/4"	AL-DP125	SS-DP125	BR-DP125	PP-DP150
1-1/2"	AL-DP150	SS-DP150	BR-DP150	PP-DP150
2"	AL-DP200	SS-DP200	BR-DP200	PP-DP200
2-1/2"	AL-DP250	SS-DP250	BR-DP250	--
3"	AL-DP300	SS-DP300	BR-DP300	PP-DP300
4"	AL-DP400	SS-DP400	BR-DP400	PP-DP400
5"	AL-DP500	--	--	--
6"	AL-DP600	SS-DP600	--	--
8"	AL-DP800-1	--	--	--
8"	AL-DP800-2	--	--	--

3/4" - 6" camlocks interchange with Mil Spec A-A59326A.

### 8" Camlocks

**Type 1:** PT Domestic, Dixon Global, Campbell, Kuri Import (Standard)

**Type 2:** Dixon Domestic, PT Import, Kuri HD801, Neco

## PART DC Dust Cap



Size	Aluminum	Stainless	Brass	Polypropylene
3/4"	AL-DC075	SS-DC075	BR-DC075	PP-DC075
1"	AL-DC100	SS-DC100	BR-DC100	PP-DC100
1-1/4"	AL-DC125	SS-DC125	BR-DC125	PP-DC150
1-1/2"	AL-DC150	SS-DC150	BR-DC150	PP-DC150
2"	AL-DC200	SS-DC200	BR-DC200	PP-DC200
2-1/2"	AL-DC250	SS-DC250	BR-DC250	--
3"	AL-DC300	SS-DC300	BR-DC300	PP-DC300
4"	AL-DC400	SS-DC400	BR-DC400	PP-DC400
5"	AL-DC500	--	--	--
6"	AL-DC600	SS-DC600	--	--
8"	AL-DC800-1	--	--	--
8"	AL-DC800-2	--	--	--

3/4" - 6" camlocks interchange with Mil Spec A-A59326A.

### 8" Camlocks

**Type 1:** PT Domestic, Dixon Global, Campbell, Kuri Import (Standard)

**Type 2:** Dixon Domestic, PT Import, Kuri HD801, Neco

## RL Ring Lok Camlocks

21



Size	Part B		Part C	
	Aluminum	Stainless	Aluminum	Stainless
	Part #	Part #	Part #	Part #
1"	--	--	--	SS-C100-RL
1 1/2"	--	--	--	SS-C150-RL
2"	AL-B200-RL	SS-B200-RL	AL-C200-RL	SS-C200-RL
3"	AL-B300-RL	SS-B300-RL	AL-C300-RL	SS-C300-RL
4"	AL-B400-RL	SS-B400-RL	AL-C400-RL	SS-C400-RL
6"	--	--	AL-C600-AL	--



Size	Part D		Part DC	
	Aluminum	Stainless	Aluminum	Stainless
	Part #	Part #	Part #	Part #
1"	--	SS-D100-RL	--	SS-DC100-RL
1 1/2"	--	SS-D150-RL	--	SS-DC150-RL
2"	AL-D200-RL	SS-D200-RL	AL-DC200-RL	SS-DC200-RL
3"	AL-D300-RL	SS-D300-RL	AL-DC300-RL	SS-DC300-RL
4"	AL-D400-RL	SS-D400-RL	AL-DC400-RL	SS-DC400-RL
6"	AL-D600-RL	--	AL-DC600-RL	--



Size	Composite C		Composite E	
	Aluminum	Stainless	Aluminum	Stainless
	Part #	Part #	Part #	Part #
2"	CPAL-200-RL	CPSS-C200-RL	CPAL-E200	CPSS-E200
3"	CPAL-300-RL	CPSS-C300-RL	CPAL-E300	CPSS-E300
4"	CPAL-400-RL	CPSS-C400-RL	CPAL-E400	CPSS-E400

## RL Ring Lok Camlocks



Size	DA Adapter	
	Aluminum	Stainless
	Part #	Part #
3" x 2"	AL-DA3020-RL	SS-DA3020-RL
3" x 4"	AL-DA3040-RL	SS-DA3040-RL
4" x 3"	AL-DA4030-RL	SS-DA4030-RL
6" x 4"	AL-DA6040-RL	--



Size	DD Adapter	
	Aluminum	Stainless
	Part #	Part #
2" x 2"	AL-DD2020-RL	SS-DD2020-RL
3" x 3"	AL-DD3030-RL	SS-DD3030-RL
4" x 4"	AL-DD4040-RL	SS-DD4040-RL



Part #	Camlock Size
BR-HRP200-RL	2"
BR-HRP300-RL	3" - 4"
BR-HRP600-RL	6"



Part #	Camlock Size
SS-HRP100-RL	1"
SS-HRP150-RL	1 1/2"
SS-HRP200-RL	2"
SS-HRP300-RL	3" - 4"

## PART DC Dust Cap with 90° Lock Out Handles



Aluminum Part DCL

Part #	Size
AL-DCL200	2"
AL-DCL300	3"
AL-DCL400	4"
AL-DCL600	6"

## AL-SS Camlock Adapters

### DA Adapter

21



Aluminum Reducer

Part #	Size
AL-DA2015	2" x 1-1/2"
AL-DA2030	2" x 3"
AL-DA2040	2" x 4"
AL-DA3020	3" x 2"
AL-DA3040	3" x 4"
AL-DA4020	4" x 2"
AL-DA4030	4" x 3"
AL-DA4060	4" x 6"
AL-DA6030	6" x 3"
AL-DA6040	6" x 4"

Stainless Reducer

Part #	Size
SS-DA3020	3" x 2"
SS-DA4020	4" x 2"
SS-DA4030	4" x 3"

### DD Adapter



Aluminum Reducer

Part #	Size
AL-DD2020	2" x 2"
AL-DD3020	3" x 2"
AL-DD3030	3" x 3"
AL-DD4030	4" x 3"
AL-DD4040	4" x 4"
AL-DD6040	6" x 4"

Stainless Reducer

Part #	Size
SS-DD2020	2" x 2"
SS-DD3020	3" x 2"
SS-DD3030	3" x 3"
SS-DD4030	4" x 3"
SS-DD4040	4" x 4"

### AA Adapter



Aluminum Reducer

Part #	Size
AL-AA2015	2" x 1/2"
AL-AA2020	2" x 2"
AL-AA3020	3" x 2"
AL-AA3030	3" x 3"
AL-AA4020	4" x 2"
AL-AA4030	4" x 3"
AL-AA4040	4" x 4"
AL-AA6040	6" x 4"

Stainless Reducer

Part #	Size
SS-AA2020	2" x 2"
SS-AA3020	3" x 2"
SS-AA3030	3" x 3"
SS-AA4030	4" x 3"
SS-AA4040	4" x 4"
SS-AA6040	6" x 4"

# AL-SS Camlock Adapters

Flange Adapter x Male



Size	Part #	
	Aluminum	Stainless
2"	AL-FLA200	SS-FLA200
3"	AL-FLA300	SS-FLA300
4"	AL-FLA400	SS-FLA400
6"	AL-FLA600	SS-FLA600
8"	AL-FLA800-1	SS-FLA800-1

- Gaskets and bolt kits available on page 190.

Flange Adapter Male



Size	Part #	
	Aluminum	Stainless
2"	AL-FLD200	SS-FLD200
3"	AL-FLD300	SS-FLD300
4"	AL-FLD400	SS-FLD400
6"	AL-FLD600	SS-FLD600
8"	AL-FLA800-1	SS-FLA800-1

- Gaskets and bolt kits available on page 190.

45° Adapter



Size	Part #
F x M	
3" x 3"	AL-DA3030-45
4" x 4"	AL-DA4040-45
6" x 6"	AL-DA6060-45

90° Adapter



Size	Part #
F x M	
3" x 3"	AL-DA3030-90
4" x 4"	AL-DA4040-90
6" x 6"	AL-DA6060-90

Y Adapter



Size	Part #
F x M	
4" x 4"	AL-DAA404040-Y*
6" x 6"	AL-DAA606060-Y*

\* Special Order

Lock Pin & S-Hook Chain



Description	Part #
Camlock Safety Lock Pin	CSLP
6" Chain with S-Hook	CSC-6
12" Chain with S-Hook	CSC-12

Stainless Handle, Ring & Pin



Part #	Size
SS-HRP075	1/2" - 3/4"
SS-HRP100	1"
SS-HRP200	1 1/2" - 2 1/2"
SS-HRP300	3" - 4"
SS-HRP600	6"

Brass Handle, Ring & Pin

Part #	Size
BR-HRP075	1/2" - 3/4"
BR-HRP100	1"
BR-HRP200	1 1/2" - 2 1/2"
BR-HRP300	3" - 4"
BR-HRP600	6"

90° Stainless Handle, Ring & Pin



Part #	Size
SS-HRP200-LH	2"
SS-HRP300-LH	3" - 4"
SS-HRP600-LH	6"

## SB/SL Safety Bumps

21



Safety Bump Dust Cap

Part #	Size
SBDC-200	2"
SBDC-300	3"
SBDC-400	4"
SBDC-200-AL	2"
SBDC-300-AL	3"
SBDC-400-AL	4"



Safety Bump Dust Plug

Part #	Size
SBDP-200	2"
SBDP-300	3"
SBDP-400	4"
SBDP-200-AL	2"
SBDP-300-AL	3"
SBDP-400-AL	4"



Food Grade Safety Bump Dust Cap

Part #	Size
SBDC-200WH	2"
SBDC-300WH	3"
SBDC-400WH	4"



Food Safety Bump Dust Plug

Part #	Size
SBDP-200WH	2"
SBDP-300WH	3"
SBDP-400WH	4"



Safety Locks

Part #	Size	Color
SL-200	2"	Blue
SL-300	3"	Red
SL-400	4"	Orange



Stainless Steel Strainer Disc

Part #	Size
SDS-200	2"
SDS-300	3"
SDS-400	4"

Aluminum Strainer Disc

Part #	Size
SDA-200	2"
SDA-300	3"
SDA-400	4"

## SL Sight Glass



Part #	Size
SIGHT-200	2"
SIGHT-300	3"
SIGHT-400	4"



Part #	Size
TTF40SG	4"

## Camlock Safety Straps



Part #	Length	Camlock Size
ESS-CGVS-19	19"	2" - 3"
ESS-CGVS-30	30"	4" - 6"

The highly visible 1-1/2" wide fluorescent orange safety straps secures camlock arms down or bundles hose together.

## CG Camlock Gaskets



21

	Black NBR	Extra Thick NBR	Hot Oil	Teflon/BUNA Envelope	Viton
Temp.	-40°F to 200°F	-40°F to 200°F	-55°F to 325°F	-40°F to 200°F	-30°F to 400°F
Size	Part #	Part #	Part #	Part #	Part #
3/4"	CGS-075	--	--	CGTB-075	CGVT-075
1"	CGS-100	--	--	CGTB-100	CGVT-100
1-1/4"	CGS-125	--	--	CGTB-125	CGVT-125
1-1/2"	CGS-150	--	--	CGTB-150	CGVT-150
2"	CGS-200	CGST-200	CGS-200-HO	CGTB-200	CGVT-200
2-1/2"	CGS-250	--	--	CGTB-250	CGVT-250
3"	CGS-300	CGST-300	CGS-300-HO	CGTB-300	CGVT-300
4"	CGS-400	CGST-400	CGS-400-HO	CGTB-400	CGVT-400
5"	CGS-500	--	--	--	--
6"	CGS-600	CGST-600	--	--	--
8"	CGS-800	--	--	--	--

## Camlock Working Pressure

Maximum Working Pressure Ratings for Camlock Couplers @ 20°C / 70°F with NBR Gaskets					
Size	Ring Lock	Aluminum	Stainless	Brass	Polypropylene
3/4"	--	200	200	200	100
1"	250	200	200	200	100
1-1/4"	--	200	200	200	100
1-1/2"	--	200	200	200	100
2"	250	200	200	200	100
2-1/2"	--	150	150	150	--
3"	150	125	125	125	75
4"	150	100	100	100	60
5"	--	75	75	--	--
6"	100	75	75	75	--
8"	--	50	--	--	--

### WARNING!



- Camlock Couplings Should Never Be Used For Compressed Air, Gases Or Steam

## SBC/DC/DBC Clamps

### SBC Spiral Bolt Clamps

22



Clockwise / Right Hand

Part #	Hose ID
SBC-200	2"
SBC-250	2-1/2"
SBC-300	3"
SBC-400	4"
SBC-500	5"
SBC-600	6"
SBC-800	8"
SBC-1000	10"
SBC-1200	12"

Counter-Clockwise / Left Hand

Part #	Hose ID
SBCK-200	2"
SBCK-250	2-1/2"
SBCK-300	3"
SBCK-400	4"
SBCK-500	5"
SBCK-600	6"
SBCK-800	8"
SBCK-1000	10"

### DC Ducting / Bridge Clamps



Clockwise / Right Hand

Part #	Hose ID
DC-2.5	2-1/2"
DC-3.0	3"
DC-4.0	4"
DC-5.0	5"
DC-6.0	6"
DC-7.0	7"
DC-8.0	8"
DC-10.0	10"
DC-12.0	12"

Counter-Clockwise / Left Hand

Part #	Hose ID
DCK-2.5	2-1/2"
DCK-3.0	3"
DCK-4.0	4"
DCK-5.0	5"
DCK-6.0	6"
DCK-7.0	7"
DCK-8.0	8"
DCK-10.0	10"
DCK-12.0	12"

### DBC Double Bolt Clamps



Part #	From OD	To OD	Part #	From OD	To OD
DBC-400	3-1/2"	4"	DBC-769	6-15/16"	7-5/8"
DBC-463	4-1/16"	4-7/16"	DBC-818	7-11/16"	8-3/16"
DBC-525	4-1/16"	5"	DBC-875	8-1/4"	8-7/8"
DBC-550	5"	5-1/2"	DBC-988	8-15/16"	9-7/8"
DBC-600	5-1/2"	6-1/16"	DBC-1125	9-15/16"	11-3/8"
DBC-675	6-1/8"	6-7/8"	DBC-1275	11-3/8"	13"

## P Preformed Punch-Type Clamps



Made to slide on hose before tightening. Double wrapped and formed to a given diameter size. To order, measure the outside diameter of the hose with its fitting inserted. Then select the next larger clamp diameter.

22

### Galvanized Carbon Steel

Part #	Band Width	Clamp ID	Standard Package
P-3	3/8"	13/16	100
P-311	3/8"	1-3/8	100
P-4	5/8"	1	100
P-5	5/8"	1-1/4	100
P-6	5/8"	1-1/2	100
P-7	5/8"	1-3/4	100
P-8	5/8"	2	100
P-9	5/8"	2-1/4	100
P-10	5/8"	2-1/2	50
P-11	5/8"	2-3/4	50
P-12	5/8"	3	50
P-14	5/8"	3-1/2	50
P-16	5/8"	4	25
P-18	5/8"	4-1/2	25
P-20	5/8"	5	25
P-24	5/8"	6	25
P-28	5/8"	7	50
P-32	5/8"	8	50

### Stainless Steel

Part #	Band Width	Clamp ID	Standard Package
P-3-SS	3/8"	13/16	100
P-311-SS	3/8"	1-3/8	100
P-4-SS	5/8"	1	100
P-5-SS	5/8"	1-1/4	100
P-6-SS	5/8"	1-1/2	100
P-7-SS	5/8"	1-3/4	100
P-8-SS	5/8"	2	100
P-9-SS	5/8"	2-1/4	100
P-10-SS	5/8"	2-1/2	50
P-11-SS	5/8"	2-3/4	50
P-12-SS	5/8"	3	50
P-14-SS	5/8"	3-1/2	50
P-16-SS	5/8"	4	25
P-18-SS	5/8"	4-1/2	25
P-20-SS	5/8"	5	25
P-24-SS	5/8"	6	25
P-28-SS	5/8"	7	50
P-32-SS	5/8"	8	50



Part #	Item Description
P-1000	Punch Lock Tool

## PB Strapping & Buckles

22



**Tool**

Part #	Item Description
PB-001	Banding Tool



**Strapping - 201 Stainless**

Part #	Size (in)	Gauge (in)	Package	Pack Quantity
PB204	1/2	0.030	Box	100'
PB205	5/8	0.030	Box	100'
PB206	3/4	0.030	Box	100'



**Buckle - 201 Stainless**

Part #	Size (in)	Box Quantity
PB254	1/2	100
PB255	5/8	100
PB256	3/4	100



## W2 Mikalor HD T-Bolt Clamps



Stainless Steel with  
Plated Steel Screw

Part #	Range		Max Torque ft/lbs	Max WP psi	Box Quantity
	in	mm			
W2-17-19	1 <sup>1</sup> / <sub>16</sub> - <sup>3</sup> / <sub>4</sub>	17 - 19	7.4	652	50
W2-19-21	<sup>3</sup> / <sub>4</sub> - 1 <sup>3</sup> / <sub>16</sub>	19 - 21	7.4	652	50
W2-21-23	<sup>13</sup> / <sub>16</sub> - <sup>29</sup> / <sub>32</sub>	21 - 23	7.4	652	50
W2-23-25	<sup>29</sup> / <sub>32</sub> - 1	23 - 25	7.4	652	50
W2-25-27	1 - 1 <sup>1</sup> / <sub>16</sub>	25 - 27	7.4	652	50
W2-27-29	1 <sup>1</sup> / <sub>16</sub> - 1 <sup>5</sup> / <sub>32</sub>	27 - 29	7.4	652	50
W2-29-31	1 <sup>5</sup> / <sub>32</sub> - 1 <sup>7</sup> / <sub>32</sub>	29 - 31	9.6	580	50
W2-31-34	1 <sup>7</sup> / <sub>32</sub> - 1 <sup>5</sup> / <sub>16</sub>	31 - 34	9.6	580	50
W2-34-37	1 <sup>5</sup> / <sub>16</sub> - 1 <sup>7</sup> / <sub>16</sub>	34 - 37	9.6	580	50
W2-37-40	1 <sup>7</sup> / <sub>16</sub> - 1 <sup>9</sup> / <sub>16</sub>	37 - 40	9.6	580	50
W2-40-43	1 <sup>9</sup> / <sub>16</sub> - 1 <sup>11</sup> / <sub>16</sub>	40 - 43	9.6	580	50
W2-43-47	1 <sup>11</sup> / <sub>16</sub> - 1 <sup>27</sup> / <sub>32</sub>	43 - 47	11.8	522	50
W2-47-51	1 <sup>27</sup> / <sub>32</sub> - 2	47 - 51	11.8	522	50
W2-51-55	2 - 2 <sup>5</sup> / <sub>32</sub>	51 - 55	11.8	522	25
W2-55-59	2 <sup>5</sup> / <sub>32</sub> - 2 <sup>5</sup> / <sub>16</sub>	55 - 59	11.8	522	25
W2-59-63	2 <sup>5</sup> / <sub>16</sub> - 2 <sup>15</sup> / <sub>32</sub>	59 - 63	11.8	522	25
W2-63-68	2 <sup>15</sup> / <sub>32</sub> - 2 <sup>11</sup> / <sub>16</sub>	63 - 68	11.8	522	25
W2-68-73	2 <sup>11</sup> / <sub>16</sub> - 2 <sup>7</sup> / <sub>8</sub>	68 - 73	22.1	406	25
W2-73-79	2 <sup>7</sup> / <sub>8</sub> - 3 <sup>3</sup> / <sub>32</sub>	73 - 79	22.1	406	25
W2-79-85	3 <sup>3</sup> / <sub>32</sub> - 3 <sup>5</sup> / <sub>16</sub>	79 - 85	22.1	406	25
W2-85-91	3 <sup>5</sup> / <sub>16</sub> - 3 <sup>9</sup> / <sub>16</sub>	85 - 91	22.1	290	25
W2-91-97	3 <sup>9</sup> / <sub>16</sub> - 3 <sup>13</sup> / <sub>16</sub>	91 - 97	22.1	290	25
W2-97-104	3 <sup>13</sup> / <sub>16</sub> - 4 <sup>3</sup> / <sub>32</sub>	97 - 104	22.1	290	25
W2-104-112	4 <sup>3</sup> / <sub>32</sub> - 4 <sup>3</sup> / <sub>8</sub>	104 - 112	22.1	174	25
W2-112-121	4 <sup>3</sup> / <sub>8</sub> - 4 <sup>3</sup> / <sub>4</sub>	112 - 121	22.1	174	25
W2-121-130	4 <sup>3</sup> / <sub>4</sub> - 5 <sup>1</sup> / <sub>8</sub>	121 - 130	22.1	174	25
W2-125-135	4 <sup>15</sup> / <sub>16</sub> - 5 <sup>5</sup> / <sub>16</sub>	125 - 135	22.1	174	25
W2-130-140	5 <sup>1</sup> / <sub>8</sub> - 5 <sup>1</sup> / <sub>2</sub>	130 - 140	33.2	130	10
W2-140-150	5 <sup>1</sup> / <sub>2</sub> - 5 <sup>7</sup> / <sub>8</sub>	140 - 150	33.2	130	10
W2-150-162	5 <sup>7</sup> / <sub>8</sub> - 6 <sup>3</sup> / <sub>8</sub>	150 - 162	33.2	130	10
W2-162-174	6 <sup>3</sup> / <sub>8</sub> - 6 <sup>7</sup> / <sub>8</sub>	162 - 174	33.2	87	10
W2-174-187	6 <sup>7</sup> / <sub>8</sub> - 7 <sup>3</sup> / <sub>8</sub>	174 - 187	33.2	87	10
W2-187-200	7 <sup>3</sup> / <sub>8</sub> - 7 <sup>7</sup> / <sub>8</sub>	187 - 200	33.2	87	10
W2-200-213	7 <sup>7</sup> / <sub>8</sub> - 8 <sup>3</sup> / <sub>8</sub>	200 - 213	33.2	43	10
W2-213-226	8 <sup>3</sup> / <sub>8</sub> - 8 <sup>7</sup> / <sub>8</sub>	213 - 226	33.2	43	10
W2-226-239	8 <sup>7</sup> / <sub>8</sub> - 9 <sup>3</sup> / <sub>8</sub>	226 - 239	33.2	43	10
W2-239-252	9 <sup>3</sup> / <sub>8</sub> - 9 <sup>7</sup> / <sub>8</sub>	239 - 252	33.2	43	10
W2-252-265	9 <sup>15</sup> / <sub>16</sub> - 10 <sup>7</sup> / <sub>16</sub>	252 - 265	33.2	43	10
W2-265-278	10 <sup>7</sup> / <sub>16</sub> - 10 <sup>29</sup> / <sub>32</sub>	265 - 278	33.2	43	10
W2-291-304	11 <sup>15</sup> / <sub>32</sub> - 11 <sup>31</sup> / <sub>32</sub>	291 - 304	33.2	43	10
W2-317-330	12 <sup>7</sup> / <sub>16</sub> - 13	317 - 330	33.2	43	10
W2 DISPLAY-01	W2 DISPLAY	20" x 30"	--	--	

\* For all stainless use W4



## W2-CT Constant Tension

22



**Stainless Steel with  
Plated Steel Screw**

Part #	Range		Max Torque ft/lbs	Max WP psi	Box Quantity
	in	mm			
W2-CT-17-19	1 <sup>1</sup> / <sub>16</sub> - 3 <sup>1</sup> / <sub>4</sub>	17 - 19	3.3	652	50
W2-CT-19-21	3 <sup>1</sup> / <sub>4</sub> - 1 <sup>3</sup> / <sub>16</sub>	19 - 21	3.3	652	50
W2-CT-21-23	1 <sup>9</sup> / <sub>16</sub> - 2 <sup>9</sup> / <sub>32</sub>	21 - 23	3.3	652	50
W2-CT-23-25	2 <sup>9</sup> / <sub>32</sub> - 1	23 - 25	3.3	652	50
W2-CT-25-27	1 - 1- <sup>1</sup> / <sub>16</sub>	25 - 27	3.3	652	50
W2-CT-27-29	1- <sup>1</sup> / <sub>16</sub> - 1- <sup>5</sup> / <sub>32</sub>	27 - 29	3.3	652	50
W2-CT-29-31	1- <sup>5</sup> / <sub>32</sub> - 1- <sup>7</sup> / <sub>32</sub>	29 - 31	5.9	609	50
W2-CT-31-34	1- <sup>7</sup> / <sub>32</sub> - 1- <sup>5</sup> / <sub>16</sub>	31 - 34	5.9	609	50
W2-CT-34-37	1- <sup>5</sup> / <sub>16</sub> - 1- <sup>7</sup> / <sub>16</sub>	34 - 37	5.9	580	50
W2-CT-37-40	1- <sup>7</sup> / <sub>16</sub> - 1- <sup>9</sup> / <sub>16</sub>	37 - 40	5.9	580	50
W2-CT-40-43	1- <sup>9</sup> / <sub>16</sub> - 1- <sup>11</sup> / <sub>16</sub>	40 - 43	5.9	551	50
W2-CT-43-47	1- <sup>11</sup> / <sub>16</sub> - 1- <sup>27</sup> / <sub>32</sub>	43 - 47	7.4	551	50
W2-CT-47-51	1- <sup>27</sup> / <sub>32</sub> - 2	47 - 51	7.4	522	50
W2-CT-51-55	2 - 2- <sup>5</sup> / <sub>32</sub>	51 - 55	7.4	522	50
W2-CT-55-59	2- <sup>5</sup> / <sub>32</sub> - 2- <sup>5</sup> / <sub>16</sub>	55 - 59	7.4	493	25
W2-CT-59-63	2- <sup>5</sup> / <sub>16</sub> - 2- <sup>15</sup> / <sub>32</sub>	59 - 63	7.4	493	25
W2-CT-63-68	2- <sup>15</sup> / <sub>32</sub> - 2- <sup>11</sup> / <sub>16</sub>	63 - 68	7.4	493	25
W2-CT-68-73	2- <sup>11</sup> / <sub>16</sub> - 2- <sup>7</sup> / <sub>8</sub>	68 - 73	18.4	406	25
W2-CT-73-79	2- <sup>7</sup> / <sub>8</sub> - 3- <sup>3</sup> / <sub>32</sub>	73 - 79	18.4	406	25
W2-CT-79-85	3- <sup>3</sup> / <sub>32</sub> - 3- <sup>5</sup> / <sub>16</sub>	79 - 85	18.4	406	25
W2-CT-85-91	3- <sup>5</sup> / <sub>16</sub> - 3- <sup>9</sup> / <sub>16</sub>	85 - 91	18.4	290	25
W2-CT-91-97	3- <sup>9</sup> / <sub>16</sub> - 3- <sup>13</sup> / <sub>16</sub>	91 - 97	18.4	290	25
W2-CT-97-104	3- <sup>13</sup> / <sub>16</sub> - 4- <sup>3</sup> / <sub>32</sub>	97 - 104	18.4	290	25
W2-CT-104-112	4- <sup>3</sup> / <sub>32</sub> - 4- <sup>3</sup> / <sub>8</sub>	104 - 112	18.4	174	25
W2-CT-112-121	4- <sup>3</sup> / <sub>8</sub> - 4- <sup>3</sup> / <sub>4</sub>	112 - 121	18.4	174	25
W2-CT-121-130	4- <sup>3</sup> / <sub>4</sub> - 5- <sup>1</sup> / <sub>8</sub>	121 - 130	18.4	174	25
W2-CT-130-140	5- <sup>1</sup> / <sub>8</sub> - 5- <sup>1</sup> / <sub>2</sub>	130 - 140	36.8	130	10
W2-CT-140-150	5- <sup>1</sup> / <sub>2</sub> - 5- <sup>7</sup> / <sub>8</sub>	140 - 150	36.8	130	10
W2-CT-150-162	5- <sup>7</sup> / <sub>8</sub> - 6- <sup>3</sup> / <sub>8</sub>	150 - 162	36.8	130	10
W2-CT-162-174	6- <sup>3</sup> / <sub>8</sub> - 6- <sup>7</sup> / <sub>8</sub>	162 - 174	36.8	87	10
W2-CT-174-187	6- <sup>7</sup> / <sub>8</sub> - 7- <sup>3</sup> / <sub>8</sub>	174 - 187	36.8	87	10
W2-CT-187-200	7- <sup>3</sup> / <sub>8</sub> - 7- <sup>7</sup> / <sub>8</sub>	187 - 200	36.8	87	10
W2-CT-200-213	7- <sup>7</sup> / <sub>8</sub> - 8- <sup>3</sup> / <sub>8</sub>	200 - 213	36.8	43	10
W2-CT-213-226	8- <sup>3</sup> / <sub>8</sub> - 8- <sup>7</sup> / <sub>8</sub>	213 - 226	36.8	43	10

\* For all stainless use W4



## W2-AL/AS Worm Gear ASFA

### WORM GEAR ASFA - L (9mm band)



Stainless Steel with  
Plated Steel Screw

### WORM GEAR ASFA - S (12mm band)



Stainless Steel with  
Plated Steel Screw

22

Part #	Range		Max Torque ft/lbs	Max WP psi
	in	mm		
W2-AL-8-12	0.31 - 0.47	8 - 12	1.1	400
W2-AL-8-16	0.31 - 0.63	8 - 16	2.2	400
W2-AL-12-22	0.47 - 0.87	12 - 22	2.2	400
W2-AL-16-27	0.63 - 1.06	16 - 27	2.6	400
W2-AL-20-32	0.79 - 1.26	20 - 32	2.6	400
W2-AL-25-40	0.98 - 1.57	25 - 40	3	400
W2-AL-30-45	1.18 - 1.77	30 - 45	3	400
W2-AL-32-50	1.26 - 1.97	32 - 50	3	340
W2-AL-40-60	1.57 - 2.36	40 - 60	3	270
W2-AL-50-70	1.97 - 2.76	50 - 70	3	240
W2-AL-60-80	2.36 - 3.15	60 - 80	3	200
W2-AL-70-90	2.76 - 3.54	70 - 90	3	180
W2-AL-80-100	3.15 - 3.94	80 - 100	3	160
W2-AL-90-110	3.54 - 4.33	90 - 110	3	145
W2-AL-100-120	3.94 - 4.72	100 - 120	3	130
W2-AL-110-130	4.33 - 5.12	110 - 130	3	100
W2-AL-120-140	4.72 - 5.51	120 - 140	3	90
W2-AL-130-150	5.12 - 5.91	130 - 150	3	70
W2-AL-140-160	5.51 - 6.30	140 - 160	3	60

Part #	Range		Max Torque ft/lbs	Max WP psi
	in	mm		
--	--	--	--	--
--	--	--	--	--
--	--	--	--	--
W2-AS-16-27	0.63 - 1.06	16 - 27	3.1	500
W2-AS-20-32	0.79 - 1.26	20 - 32	3.8	500
W2-AS-25-40	0.98 - 1.57	25 - 40	3.8	500
W2-AS-30-45	1.18 - 1.77	30 - 45	3.8	500
W2-AS-32-50	1.26 - 1.97	32 - 50	4.4	500
W2-AS-40-60	1.57 - 2.36	40 - 60	4.4	400
W2-AS-50-70	1.97 - 2.76	50 - 70	5.0	350
W2-AS-60-80	2.36 - 3.15	60 - 80	5.0	280
W2-AS-70-90	2.76 - 3.54	70 - 90	5.0	240
W2-AS-80-100	3.15 - 3.94	80 - 100	5.0	200
W2-AS-90-110	3.54 - 4.33	90 - 110	5.0	170
W2-AS-100-120	3.94 - 4.72	100 - 120	5.0	145
W2-AS-110-130	4.33 - 5.12	110 - 130	5.0	110
W2-AS-120-140	4.72 - 5.51	120 - 140	5.0	100
W2-AS-130-150	5.12 - 5.91	130 - 150	5.0	80
W2-AS-140-160	5.51 - 6.30	140 - 160	5.0	70

## GCM Micro Gear Clamps

22



Stainless Steel with Plated Steel Screw

Part #	Min	Max	Standard Package
GCM-04	1/4"	5/8"	10
GCM-06	5/16"	7/8"	10
GCM-08	7/16"	1"	10
GCM-10	1/2"	1-1/16"	10
GCM-12	9/16"	1-1/4"	10

Stainless Steel with Plated Steel Screw

Part #	Min	Max	Standard Package
GCMS-04	1/4"	5/8"	10
GCMS-06	5/16"	7/8"	10
GCMS-08	7/16"	1"	10
GCMS-10	1/2"	1-1/16"	10
GCMS-12	9/16"	1-1/4"	10

## GC Worm Gear Clamps



Stainless Steel with Plated Steel Screw

Part #	Min	Max	Standard Package
GC-06	3/8"	7/8"	10
GC-08	7/16"	1"	10
GC-10	9/16"	1-1/16"	10
GC-12	5/8"	1-1/4"	10
GC-16	11/16"	1-1/2"	10
GC-20	3/4"	1-3/4"	10
GC-24	1-1/16"	2"	10
GC-28	1-5/16"	2-1/4"	10
GC-32	1-1/2"	2-1/2"	10
GC-36	1-3/4"	2-3/4"	10
GC-40	2"	3"	10
GC-44	2-1/4"	3-1/4"	10
GC-48	2-1/2"	3-1/2"	10
GC-52	2-3/4"	3-3/4"	10
GC-56	3"	4"	10
GC-60	3"	4-1/4"	10
GC-64	3-1/2"	4-1/2"	10
GC-72	4"	5"	10
GC-84	3-1/2"	5-1/2"	10
GC-88	4"	6"	10
GC-96	4-1/2"	6-1/2"	10
GC-104	5"	7"	10
GC-128	5-5/8"	8-1/2"	1
GC-152	7-1/8"	10"	1
GC-188	9-3/8"	12-1/4"	1
GC-200	10-1/8"	13"	1
GC-212	10-7/8"	13-3/4"	1
GC-224	11-5/8"	14-1/2"	1
GC-236	12-3/8"	15-1/4"	1
GC-248	13-1/8"	16"	1
GC-312	17-1/8"	20"	1

Stainless Steel with Plated Steel Screw

Part #	Min	Max	Standard Package
GCS-06	3/8"	7/8"	10
GCS-08	7/16"	1"	10
GCS-10	1/2"	1-1/16"	10
GCS-12	1/2"	1-1/4"	10
GCS-16	11/16"	1-1/2"	10
GCS-20	3/4"	1-3/4"	10
GCS-24	1"	2"	10
GCS-28	1-1/4"	2-1/4"	10
GCS-32	1-1/2"	2-1/2"	10
GCS-36	1-3/4"	2-3/4"	10
GCS-40	2"	3"	10
GCS-44	2-1/4"	3-1/4"	10
GCS-48	2-1/2"	3-1/2"	10
GCS-52	2-3/4"	3-3/4"	10
GCS-56	3"	4"	10
GCS-60	3"	4-1/4"	10
GCS-64	3-1/2"	4-1/2"	10
GCS-72	4"	5"	10
GCS-84	3-1/2"	5-1/2"	10
GCS-88	4"	6"	10
GCS-96	4-1/2"	6-1/2"	10
GCS-104	5"	7"	10
GCS-128	5-5/8"	8-1/2"	1
GCS-152	7-1/8"	10"	1
GCS-188	9-3/8"	12-1/4"	1
GCS-200	10-1/8"	13"	1
GCS-212	10-7/8"	13-3/4"	1
GCS-224	11-5/8"	14-1/2"	1
GCS-236	12-3/8"	15-1/4"	1
GCS-248	13-1/8"	16"	1
GCS-312	17-1/8"	20"	1





## Oetiker 2-Ear Clamps/Pincers



Part #	Nominal Size	ID Close	ID Open
		in	in
0041	5/32"	0.122	0.161
0045	11/64"	0.138	0.177
0305	3/6"	0.118	0.197
0507	1/4"	0.197	0.276
0709	5/16"	0.276	0.354
0811	3/8"	0.315	0.433
0911	7/16"	0.354	0.433
1113	1/2"	0.433	0.512
1315	9/16"	0.512	0.591
1517	19/32"	0.591	0.669
1518	5/8"	0.591	0.708
1720	3/4"	0.669	0.787
1922	13/16"	0.746	0.866
2023	7/8"	0.787	0.905
2225	15/16"	0.866	0.984
2327	1"	0.905	1.063
2528	1 -1/16"	0.984	1.012
2731	1 -1/8"	1.063	1.220
2831	1 -3/16"	1.102	1.220
3134	1 -5/16"	1.220	1.339
3437	1 -7/16"	1.339	1.457
3740	1 -1/2"	1.457	1.575
4043	1 -5/8"	1.575	1.693
4346	1 -3/4"	1.693	1.811



Standard Pincers

Part #
1098

Side Pincers

Part #
1099

## CS Crimp Sleeves - Camlocks, Combination Nipples, Bauer

23



**SLEEVE PART NUMBER  
CS-30309**

**CS = CRIMP SLEEVE  
30 = 3" HOSE ID  
309 = 3-9/16" SLEEVE ID**

Hose Size	Part #	Industry Part Numbers	Sleeve ID		Sleeve Length	
			in	mm	in	mm
1"	CS-10107	CSX-100128	1.44	36.6	2.29	58.1
1"	CS-10108	CSX-100132	1.50	38.1	2.29	58.1
1"	CS-10109	CSX-100136	1.56	39.6	2.29	58.1
1"	CS-10110	CSX-100140	1.63	41.4	2.29	58.1
1"	CS-10111	CSX-100144	1.69	42.9	2.29	58.1
1"	CS-10112	CSX-100148	1.75	44.4	2.29	58.1
1-1/4"	CS-13113	CSX-125152	1.81	46.0	2.32	58.9
1-1/4"	CS-13114	CSX-125156	1.88	47.8	2.32	58.9
1-1/2"	CS-15200	CSX-150200	2.00	50.8	2.36	60.0
1-1/2"	CS-15201	CSX-150204	2.06	52.3	2.36	60.0
1-1/2"	CS-15202	CSX-150208	2.13	54.1	2.36	60.0
1-1/2"	CS-15203	CSX-150212	2.19	55.6	2.36	60.0
1-1/2"	CS-15204	CSX-150216	2.25	57.2	2.36	60.0
1-1/2"	CS-15205	CSX-150220	2.31	58.7	2.36	60.0
2"	CS-20206	CSX-200224	2.38	60.5	2.76	70.0
2"	CS-20207	CSX-200228	2.44	62.0	2.76	70.0
2"	CS-20208	CSX-200232	2.50	63.5	2.76	70.0
2"	CS-20209	CSX-200236	2.56	65.0	2.76	70.0
2"	CS-20210	CSX-200240	2.63	66.8	2.76	70.0
2"	CS-20211	CSX-200244	2.69	68.3	2.76	70.0
2"	CS-20212	CSX-200248	2.75	69.9	2.76	70.0
2"	CS-20213	CSX-200252	2.81	71.4	2.76	70.0
2"	CS-20214	CSX-200256	2.88	73.2	2.76	70.0
2"	CS-20215	CSX-200260	2.94	74.7	2.76	70.0
2"	CS-20300	CSX-200300	3.00	76.2	2.76	70.0
2-1/2"	CS-25304	CSX-250316	3.25	82.6	3.11	79.0
3"	CS-30305	CSX-300320	3.31	84.1	3.94	100.0
3"	CS-30306	CSX-300324	3.38	85.9	3.94	100.0
3"	CS-30308	CSX-300332	3.50	88.9	3.94	100.0
3"	CS-30309	CSX-300336	3.56	90.4	3.94	100.0
3"	CS-30310	CSX-300340	3.63	92.2	3.94	100.0
3"	CS-30311	CSX-300344	3.69	93.7	3.94	100.0
3"	CS-30312	CSX-300348	3.75	95.3	3.94	100.0
3"	CS-30313	CSX-300352	3.81	96.8	3.94	100.0
3"	CS-30314	CSX-300356	3.88	98.6	3.94	100.0

*For stainless steel add suffix-S4*



## CS Crimp Sleeves - Camlocks, Combination Nipples, Bauer



**SLEEVE PART NUMBER  
S-30309**

**CF = CRIMP SLEEVE  
30 = 3" HOSE ID  
309 = 3-9/16" SLEEVE ID**

Hose Size	Part #	Industry Part Numbers	Sleeve ID		Sleeve Length	
			in	mm	in	mm
4	CS-40406	CSX-400424	4.00	101.6	3.94	100.0
4	CS-40407	CSX-400428	4.44	112.8	4.17	106.0
4	CS-40408	CSX-400432	4.50	114.3	4.17	106.0
4	CS-40410	CSX-400440	4.63	117.6	4.17	106.0
4	CS-40411	CSX-400444	4.69	119.1	4.17	106.0
4	CS-40412	CSX-400448	4.75	120.7	4.17	106.0
4	CS-40413	CSX-400452	4.81	122.2	4.17	106.0
4	CS-40414	CSX-400456	4.88	124.0	4.17	106.0
4	CS-40415	CSX-400460	4.94	125.5	4.17	106.0
4	CS-40500	CSX-400500	5.00	127.0	4.17	106.0
4	CS-40501	CSX-400504	5.06	128.5	4.17	106.0
6	CS-60607	CSX-600628	6.43	163.3	5.67	144.0
6	CS-60608	CSX-600632	6.50	165.1	5.67	144.0
6	CS-60610	CSX-600640	6.63	168.4	5.67	144.0
6	CS-60612	CSX-600648	6.75	171.5	5.67	144.0
6	CS-60514	CSX-600656	6.88	174.8	5.67	144.0
6	CS-60700	CSX-600700	7.00	177.8	5.67	144.0
6	CS-60702	CSX-600708	7.13	181.1	5.67	144.0
6	CS-60704	CSX-600716	7.25	184.2	5.67	144.0
6	CS-60706	CSX-600724	7.38	187.5	5.67	144.0
8	CS-80808	CSX-800832	8.50	215.9	6.50	165.0
8	CS-80900	CSX-800900	9.00	228.6	6.50	165.0
8	CS-80904	CSX-800916	9.25	235.0	6.50	165.0
8	CS-80912	CSX-800948	9.75	247.7	6.50	165.0
10	CS-1001008	CSX-10001032	10.50	266.7	7.24	184.0
10	CS-1001010	CSX-10001040	10.63	270.0	7.24	184.0
10	CS-1001012	CSX-10001048	10.75	276.4	7.24	184.0
10	CS-1001014	CSX-10001056	10.88	285.8	7.24	184.0
10	CS-1001100	CSX-10001100	11.00	323.9	7.24	184.0
10	CS-1001104	CSX-10001116	11.25	336.6	7.24	184.0
12	CS-1201212	CSX-12001248	12.75	323.9	8.66	220.0
12	CS-1201304	CSX-12001316	13.25	336.6	8.66	220.0
12	CS-1201400	CSX-12001400	14.00	355.6	8.66	220.0

*For stainless steel add suffix-S4*

## CF Crimp Ferrules - Camlocks, Combination Nipples

23



FERRULE PART NUMBER  
**CF-30313**

CF = CRIMP FERRULE  
30 = 3" HOSE ID  
313 = 3-<sup>13</sup>/<sub>16</sub>" FERRULE ID

Hose Size	Part #	Industry Part Number	Ferrule ID		Ferrule Length	
			in	mm	in	mm
3/4	CF-08104	CFX-075112	1.19	30.2	2.14	54.4
1	CF-10108	CFX-100132	1.50	38.1	2.19	58.2
1	CF-10109	CFX-100136	1.56	39.6	2.19	58.2
1	CF-10110	CFX-100140	1.63	41.4	2.19	58.2
1-1/2	CF-15200	CFX-150200	2.00	50.8	2.36	60.0
1-1/2	CF-15201	CFX-150204	2.06	52.3	2.36	60.0
1-1/2	CF-15202	CFX-150208	2.13	54.1	2.36	60.0
1-1/2	CF-15203	CFX-150212	2.19	55.6	2.36	60.0
2	CF-20209	CFX-200236	2.56	65.0	2.76	70.0
2	CF-20210	CFX-200240	2.63	66.8	2.76	70.0
2	CF-20211	CFX-200244	2.69	68.3	2.76	70.0
2	CF-20212	CFX-200248	2.75	69.9	2.76	70.0
2	CF-20213	CFX-200252	2.81	71.4	2.76	70.0
2	CF-20214	CFX-200256	2.88	73.2	2.76	70.0
2-1/2	CF-25304	CFX-250316	3.25	82.6	3.11	79.0
3	CF-30309	CFX-300336	3.56	90.4	3.94	100.0
3	CF-30310	CFX-300340	3.63	92.2	3.94	100.0
3	CF-30311	CFX-300344	3.69	93.7	3.94	100.0
3	CF-30312	CFX-300348	3.75	95.3	3.94	100.0
3	CF-30313	CFX-300352	3.81	96.8	3.94	100.0
3	CF-30314	CFX-300356	3.88	98.6	3.94	100.0
3	CF-30315	CFX-300360	3.94	100.1	3.94	100.0
3	CF-30400	CFX-300400	4.00	101.6	3.94	100.0
4	CF-40409	CFX-400436	4.56	115.8	4.17	106.0
4	CF-40410	CFX-400440	4.63	117.6	4.17	106.0
4	CF-40411	CFX-400444	4.69	119.1	4.17	106.0
4	CF-40412	CFX-400448	4.75	120.7	4.17	106.0
4	CF-40413	CFX-400452	4.81	122.2	4.17	106.0
4	CF-40414	CFX-400456	4.88	124.0	4.17	106.0
4	CF-40415	CFX-400460	4.94	125.5	4.17	106.0
4	CF-40500	CFX-400500	5.00	127.0	4.17	106.0
4	CF-40501	CFX-400504	5.06	128.5	4.17	106.0
6	CF-60610	CFX-600640	6.63	168.4	5.67	144.0
6	CF-60612	CFX-600648	6.75	171.5	5.67	144.0
6	CF-60614	CFX-600656	6.88	174.8	5.67	144.0
6	CF-60702	CFX-600708	7.13	181.1	5.67	144.0
6	CF-60704	CFX-600716	7.25	184.2	5.67	144.0
6	CF-60706	CFX-600724	7.38	187.5	5.67	144.0

*For stainless steel add suffix-S4*



## CF-L Crimp Ferrules (Long) - Ground Joints



Hose Size	Part #	Industry Part Number	Ferrule ID		Ferrule Length	
			in	mm	in	mm
2	CF-20211L	CFX-200244L	2.69	68.3	3.41	86.6
2	CF-20212L	CFX-200248L	2.75	69.9	3.41	86.6
2	CF-20213L	CFX-200252L	2.82	71.6	3.41	86.6
3	CF-30311L	CFX-300344L	3.69	93.7	3.94	100.0
3	CF-30312L	CFX-300348L	3.75	95.3	3.94	100.0
3	CF-30313L	CFX-300352L	3.81	96.8	3.94	100.0
3	CF-30314L	CFX-300356L	3.88	98.6	3.94	100.0

FERRULE PART NUMBER  
**CF-20213L**

CF = CRIMP FERRULE  
 20 = 2" HOSE ID  
 211 = 2-11/16" FERRULE ID  
 L = LONG LENGTH

## BFM Brass Ferrules

23



FERRULE PART NUMBER  
**BFM-450**

BFM = BRASS FERRULE  
450 = 0.450" FERRULE ID

Part #	ID		Length	Pierce Hole	Metal Thickness
	in	mm			
BFM-450	0.450"	11.4	0.718"	0.328"	0.025"
BFM-475	0.475"	12.1	0.718"	0.328"	0.025"
BFM-500	0.500"	12.1	0.718"	0.328"	0.025"
BFM-525	0.525"	13.3	0.718"	0.453"	0.025"
BFM-550	0.550"	14.0	0.718"	0.453"	0.025"
BFM-575	0.575"	14.6	0.968"	0.453"	0.025"
BFM-600	0.600"	15.2	0.968"	0.453"	0.025"
BFM-625	0.625"	15.9	0.968"	0.453"	0.025"
BFM-650	0.650"	16.5	0.968"	0.453"	0.025"
BFM-675	0.675"	17.2	0.968"	0.500"	0.025"
BFM-700	0.700"	17.8	0.968"	0.500"	0.025"
BFM-725	0.725"	18.4	0.968"	0.500"	0.025"
BFM-750	0.750"	19.1	0.968"	0.500"	0.025"
BFM-800	0.800"	20.3	0.968"	0.593"	0.025"
BFM-850	0.850"	21.6	0.968"	0.687"	0.025"
BFM-875	0.875"	22.2	0.968"	0.750"	0.025"
BFM-900	0.900"	22.9	0.968"	0.750"	0.025"
BFM-950	0.950"	24.1	0.968"	0.750"	0.025"
BFM-975	0.975"	24.8	0.968"	0.750"	0.040"
BFM-1000	1.000"	25.4	0.968"	0.875"	0.040"
BFM-1025	1.025"	26.0	0.968"	0.875"	0.040"
BFM-1050	1.050"	26.7	0.968"	0.875"	0.040"
BFM-1075	1.075"	27.3	0.968"	0.875"	0.040"
BFM-1100	1.100"	27.9	0.968"	0.875"	0.040"
BFM-1125	1.125"	28.6	0.968"	0.875"	0.040"
BFM-1150	1.150"	29.2	0.968"	0.875"	0.040"
BFM-1175	1.175"	29.9	0.968"	0.875"	0.040"
BFM-1200	1.200"	30.5	0.968"	0.875"	0.040"
BFM-1250	1.250"	31.8	0.968"	0.875"	0.040"
BFM-1275	1.275"	32.4	0.968"	0.875"	0.040"
BFM-1350	1.350"	34.3	0.968"	0.875"	0.040"



## Fire Hose Nozzles & Accessories

### A91 Hydrant Adapters



Female Swivel x Male Swivel

Part #	Female Thread	Male Thread
A75-150-CSA	2-1/2" CSA	1-1/2" NPSH
A91-200-CSA	2-1/2" CSA	2" NPT
A91-250-CSA	2-1/2" CSA	2-1/2" NPT
A91-300-CSA	2-1/2" CSA	3" NPT
A75-150-QST	2-1/2" QST	1-1/2" NPSH
A91-200-QST	2-1/2" QST	2" NPT
A91-250-QST	2-1/2" QST	2-1/2" NPT
A91-300-QST	2-1/2" QST	3" NPT
A75-150-BAT	2-1/2" BAT	1-1/2" NPSH
A91-200-BAT	2-1/2" BAT	2" NPT
A91-250-BAT	2-1/2" BAT	2-1/2" NPT
A91-300-BAT	2-1/2" BAT	3" NPT

### HGV/HF100 Hydrant Valves



HGV250

HF100

Part #	Female Thread	Male Thread
HGV250-CSA	2-1/2" F-CSA	2-1/2" M-CSA
HF100-CSA	2-1/2" F-CSA	1-1/2" M-NPSH
HGV250-QST	2-1/2" F-QST	1-1/2" M-QST
HF100-QST	2-1/2" F-QST	1-1/2" M-NPSH
HGV250-BAT	2-1/2" F-BAT	1-1/2" M-BAT
HF100-BAT	2-1/2" F-BAT	1-1/2" M-NPSH

24

### FNB Nozzles



FNA/FNB/FNC Plastic Fog Nozzles

Part #	Size	Thread	GPM (@ 100PSI)	Color
	in			
FNA-075	3/4"	GHT	8	Green
FNB-075	3/4"	NPSH	8	Red
FNB-100	1"	NPSH	22	Red
FNC-100	1"	NST	22	Red
FNB-150	1-1/2"	NPSH	75	Red
FNC-150	1-1/2"	NST	75	Red
FNB-200	2"	NPSH	150	Red
FNC-250*	2-1/2"	NST	150	Red



B107 Brass Nozzle

Part #	Thread
B107-16	1" NPSH
B107-20	1-1/4" NPSH
B107-24	1-1/2" NPSH



FNB/FNC Fog Nozzle

Part #	Size	Thread	GPM (@ 100PSI)
	in		
FNB-100-BR	1"	NPSH	36
FNC-100-BR	1"	NST	36
FNB-150-BR	1-1/2"	NPSH	85
FNC-150-BR	1-1/2"	NST	85
FNB-200-BR	2"	NPSH	108
FNC-250-BR	2-1/2"	NST	205



## GXX Grooved Fittings (Victaulic)

25



**Grooved Bolt Clamp**

Part #	Size
GBC-150	1-1/2"
GBC-200	2"
GBC-300	3"
GBC-400	4"
GBC-500	5"
GBC-600	6"
GBC-800	8"
GBC-1000	10"
GBC-1200	12"



**Grooved T Gasket - BUNA**

Part #	Size
GTG-150	1-1/2"
GTG-200	2"
GTG-300	3"
GTG-400	4"
GTG-500	5"
GTG-600	6"
GTG-800	8"
GTG-1000	10"
GTG-1200	12"



**Grooved Snap Clamp**

Part #	Size
GSC-200	2"
GSC-300	3"
GSC-400	4"
GSC-600	6"
GSC-800	8"



**Plated Steel Grooved Inserts**

Part #	Size
CNG-100	1"
CNG-125	1-1/4"
CNG-150	1-1/2"
CNG-200	2"
CNG-250	2-1/2"
CNG-300	3"
CNG-400	4"
CNG-500	5"
CNG-600	6"
CNG-800	8"
CNG-1000	10"
CNG-1200	12"



**Grooved 45°**

Part #	Size
G45-300	3"
G45-400	4"
G45-600	6"
G45-800	8"
G45-1000	10"
G45-1200	12"



**Grooved 90°**

Part #	Size
G90-300	3"
G90-400	4"
G90-600	6"
G90-800	8"
G90-1000	10"
G90-1200	12"



**Hose Field Clamp & Grooved Insert**

Part #	Size
RGS-800	8"
RGS-1000	10"
RGS-1200	12"

\* Sold as sets only.



### Grooved Y



Part #	Size
GY-300	3"
GY-400	4"
GY-600	6"
GY-800	8"
GY-1000	10"
GY-1200	12"

### Grooved Tee



Part #	Size
GT-300	3"
GT-400	4"
GT-600	6"
GT-800	8"
GT-1000	10"
GT-1200	12"

### Grooved x Male NPT



Part #	Grooved Size	NPT Size
GMN-2020	2"	2"
GMN-3030	3"	3"
GMN-4040	4"	4"
GMN-6060	6"	6"
GMN-8080	8"	8"

### Grooved Concentric Reducer



Part #	Size
GCR-3020	3" x 2"
GCR-4020	4" x 2"
GCR-4030	4" x 3"
GCR-6030	6" x 3"
GCR-6040	6" x 4"
GCR-8060	8" x 6"
GCR-1060	10" x 6"
GCR-1080	10" x 8"

### Grooved Flange Adapter



Part #	Size
GFA-300	3"
GFA-400	4"
GFA-600	6"
GFA-800	8"
GFA-1000	10"
GFA-1200	12"

### Grooved End Cap



Part #	Size
GEC-300	3"
GEC-400	4"
GEC-600	6"

### Grooved Butterfly Valve Lever



Part #	Size
GBVL-300	3"
GBVL-400	4"
GBVL-600	6"
GBVL-800	8"
GBVL-1000	10"
GBVL-1200	12"



Part #	Bolt Thread	Bolt Length	Clamp Size
BLT50234	1/2"	2-3/4"	3"
BLT58314	5/8"	3-1/4"	4"
BLT75414	3/4"	4-1/4"	6"
BLT78500	7/8"	5"	8"
BLT100600	1"	6"	10"
BLT100650	1"	6-1/2"	12"



## PW-18 Pressure Gun/Lance/Accessories

26



Part #	Description
PW-ST1500	Pressure Wash Gun - 5000 PSI (3/8" FNPT inlet)



Part #	Description
PW-6768	24" Insulated Lance - 1/4" NPT
PW-6769	36" Insulated Lance - 1/4" NPT
PW-6770	48" Insulated Lance - 1/4" NPT
PW-6772	80" Insulated Lance - 1/4" NPT

Female



Male



Part #	Description
QD-FPWK	Female Metric Union
QD-FPWK-06FP	Female Metric x 3/8" Female NPT
QD-FPWK-06MP	Female Metric x 3/8" Male NPT
QD-MPWK	Male Metric Union
QD-MPWK-06FP	Male Metric x 3/8" Female NPT
QD-MPWK-06MP	Male Metric x 3/8" Male NPT



Part #	Description
3/8 MFSS	Brass 3/8" M-NPT x 3/8 F-NPT Swivel 3,000 PSI
3/8 MFSS	SS 3/8" M-NPT x 3/8 F-NPT Swivel 5,000 PSI
1/2 MFSS	SS 1/2" M-NPT x 1/2 F-NPT Swivel 3,000 PSI



### Red 0° Angle Nozzles for Blasting

Part #	Colour	Angle	Orifice
PW-1808	Red	0°	4.5
PW-1811	Red	0°	6.0



### Yellow 15° Angle Nozzles for Flushing Hard Surfaces

Part #	Colour	Angle	Orifice
PW-1813	Yellow	15°	4.5
PW-1816	Yellow	15°	6.0



### Green 25° Angle Nozzles for Flushing and Wet Sweeping

Part #	Colour	Angle	Orifice
PW-1818	Green	25°	4.5
PW-1821	Green	25°	6.0



### White 40° Angle Nozzles for Washing Soft Surfaces

Part #	Colour	Angle	Orifice
PW-1823	White	40°	4.5
PW-1826	White	40°	6.0



### Flow in gallons per minute (GPM) at various pump pressures

Orifice	Pump Pressure							
	500	1000	1500	2000	2500	3000	4000	5000
3.0	1.0	1.5	1.8	2.1	2.3	2.5	3.0	3.3
3.5	1.2	1.8	2.1	2.5	2.8	3.0	3.5	3.9
4.0	1.4	2.0	2.4	2.8	3.1	3.5	4.0	4.5
4.5	1.5	2.2	2.7	3.1	3.5	3.8	4.5	5.0
5.0	1.8	2.5	3.1	3.5	3.9	4.3	5.0	5.6
5.5	1.9	2.8	3.4	3.9	4.3	4.8	5.5	6.2
6.0	2.1	3.0	3.7	4.2	4.7	5.2	6.0	6.7
6.5	2.3	3.3	4.0	4.6	5.1	5.6	6.5	7.3
7.0	2.5	3.5	4.3	4.9	5.5	6.1	7.0	7.8
7.5	2.7	3.8	4.6	5.3	5.9	6.5	7.5	8.4
8.0	2.8	4.0	4.9	5.7	6.3	6.9	8.0	8.9
8.5	3.0	4.3	5.2	6.0	6.7	7.4	8.5	9.5
9.0	3.2	4.5	5.5	6.4	7.1	7.8	9.0	10.1
10.0	3.5	5.0	6.1	7.1	7.9	8.7	10.0	11.2
12.5	4.4	6.3	7.7	8.8	9.8	10.8	12.5	14.0
15.0	5.3	7.5	9.2	10.6	11.8	12.9	15.0	16.8

## QST Straight Through Couplings

### Couplers



### Nipples



Part #	Description
QSTC44FP-S4	1/4" Coupler x 1/4" Female NPT
QSTC66FP-S4	3/8" Coupler x 3/8" Female NPT
QSTC88FP-S4	1/2" Coupler x 1/2" Female NPT
QSTC44MP-S4	1/4" Coupler x 1/4" Male NPT
QSTC66MP-S4	3/8" Coupler x 3/8" Male NPT
QSTC88MP-S4	1/2" Coupler x 1/2" Male NPT
QSTN44FP-S4	1/4" Nipple x 1/4" Female NPT
QSTN66FP-S4	3/8" Nipple x 3/8" Female NPT
QSTN88FP-S4	1/2" Nipple x 1/2" Female NPT
QSTN44MP-S4	1/4" Nipple x 1/4" Male NPT
QSTN66MP-S4	3/8" Nipple x 3/8" Male NPT
QSTN88MP-S4	1/2" Nipple x 1/2" Male NPT

## QWB/QWS Waterblast Push/Screw to Connect

### QWB Waterblast Couplings

**Application:** Waterblast

**Interchangeability:** Dixon EA, Parker WB, Aeroquip FD69, Snap-Tite 56

**Temperature Range:** -40°F to +158°F (-40°C to +70°C)

#### Coupler



Part #	Size	Thread Size	Max WP	Material	Locking Method
			psi		
QWBC86FP	1/2"	3/8" F - NPT	10,000	Steel	Ball Bearing
QWBC88FP	1/2"	1/2" F - NPT	10,000	Steel	Ball Bearing

#### Nipple



Part #	Size	Thread Size	Max WP	Material
			psi	
QWBN86FP	1/2"	3/8" F - NPT	10,000	Steel
QWBN88FP	1/2"	1/2" F - NPT	10,000	Steel

#### Set

#### Coupler + Nipple



Part #	Size	Thread Size	Max WP	Material
			psi	
QWB86-SET	1/2" / 1/2"	3/8" F - NPT / 3/8" F - NPT	10,000	Steel
QWB88-SET	1/2" / 1/2"	1/2" F - NPT / 1/2" F - NPT	10,000	Steel

### QWS Waterblast Screw to Connect

**Application:** Waterblast

**Interchangeability:** Dixon 4TDF4-SS, Spirstar, CQD, DNP CRS

**Temperature Range:** -40°F to +158°F (-40°C to +70°C)

#### Coupler



Part #	Size	Thread Size	Max WP	Material
			psi	
QWSC86FP-S6	1/2"	3/8" F - NPT	15,000	316 Stainless
QWSC88FP-S6	1/2"	1/2" F - NPT	15,000	316 Stainless

#### Nipple



Part #	Size	Thread Size	Max WP	Material
			psi	
QWSN86FP-S6	1/2"	3/8" F - NPT	15,000	316 Stainless
QWSN88FP-S6	1/2"	1/2" F - NPT	15,000	316 Stainless

#### Set

#### Coupler + Nipple



Part #	Size	Thread Size	Max WP	Material
			psi	
QWSC86-SET-S6	1/2" / 1/2"	3/8" F - NPT / 3/8" F - NPT	15,000	Stainless
QWSC88-SET-S6	1/2" / 1/2"	1/2" F - NPT / 1/2" F - NPT	15,000	Stainless



## CNT Combination Nipples



Plated Steel NPT Thread

Hose Size	Part #
1/2"	CNT-050
3/4"	CNT-075
1"	CNT-100
1-1/4"	CNT-125
1-1/2"	CNT-150
2"	CNT-200
2-1/2"	CNT-250
3"	CNT-300
4"	CNT-400
5"	CNT-500
6"	CNT-600
8"	CNT-800
10"	CNT-1000
12"	CNT-1200

316 Stainless NPT Thread

Part #
CNT-050
CNT-075
CNT-100
CNT-125
CNT-150
CNT-200
CNT-250
CNT-300
CNT-400
CNT-500
CNT-600
CNT-800
CNT-1000
CNT-1200

Brass NPT Thread

Part #
--
--
--
CNT-125-BR
CNT-150-BR
CNT-200-BR
CNT-250-BR
CNT-300-BR
CNT-400-BR
--
--
--
--
--

Polypropylene NPT Thread

Part #
CNT-050-PP
CNT-075-PP
CNT-100-PP
CNT-125-PP
CNT-150-PP
CNT-200-PP
CNT-250-PP
CNT-300-PP
CNT-400-PP
--
--
--
--
--



Plated Steel Grooved

Hose Size	Part #
1"	CNG-100
1-1/4"	CNG-125
1-1/2"	CNG-150
2"	CNG-200
2-1/2"	CNG-250
3"	CNG-300
4"	CNG-400
5"	CNG-500
6"	CNG-600
8"	CNG-800
10"	CNG-1000
12"	CNG-1200

316 Stainless Grooved

Hose Size	Part #
1"	CNG-100-S6
1-1/4"	--
1-1/2"	CNG-150-S6
2"	CNG-200-S6
2-1/2"	--
3"	CNG-300-S6
4"	CNG-400-S6
5"	--
6"	CNG-600-S6
8"	CNG-800-S6
10"	--
12"	--

## CNT-CF Combination Nipples - Crimp



Plated Steel NPT Thread

Hose Size	Part #
1"	CNT-100-CF
1-1/2"	CNT-150-CF
2"	CNT-200-CF
3"	CNT-300-CF
4"	CNT-400-CF
6"	CNT-600-CF

316 Stainless NPT Thread

Hose Size	Part #
1"	CNT-100-S6-CF
1-1/2"	CNT-150-S6-CF
2"	CNT-200-S6-CF
3"	CNT-300-S6-CF
4"	CNT-400-S6-CF
6"	CNT-600-S6-CF



Ferrule not included



## Combination Nipples

27

### Expander Plated Steel



Hose Size	NPT Size	Part Number
3/4"	1"	CNT-075X100
1"	1-1/4"	CNT-100X125
1-1/4"	1-1/2"	CNT-125X150
1-1/2"	2"	CNT-150X200
2"	2-1/2"	CNT-200X250
2-1/2"	3"	CNT-250X300
3"	4"	CNT-300X400

### Reducer Plated Steel



Hose Size	NPT Size	Part Number
3/4"	1"	CNT-075X100
1"	1-1/4"	CNT-100X125
1-1/4"	1-1/2"	CNT-125X150
1-1/2"	2"	CNT-150X200
2"	2-1/2"	CNT-200X250
2-1/2"	3"	CNT-250X300
3"	4"	CNT-300X400

### Hose Menders Plated Steel



Hose Size	Part Number
1/2"	HM-050
5/8"	HM-067
3/4"	HM-075
1"	HM-100
1-1/4"	HM-125
1-1/2"	HM-150
2"	HM-200
2-1/2"	HM-250
3"	HM-300
4"	HM-400
5"	HM-500
6"	HM-600
8"	HM-800
10"	HM-1000
12"	HM-1200

### Beveled Black Steel



Hose Size	Part Number
2"	CNB-200
3"	CNB-300
4"	CNB-400
6"	CNB-600
8"	CNB-800
10"	CNB-1000
12"	CNB-1200

### Steel 150 lbs Fixed Flange



Hose Size	Part Number
4"	CNFF-400
6"	CNFF-600
8"	CNFF-800
10"	CNFF-1000
12"	CNFF-1200

### Steel 150 lbs Turn Back



Hose Size	Part Number
4"	CNTB-400
6"	CNTB-600
8"	CNTB-800
10"	CNTB-1000
12"	CNTB-1200



## CAB Short Shanks



Aluminum NPSH

Hose Size	Part #
1-1/2"	CAB-150
2"	CAB-200
2-1/2"	CAB-250
3"	CAB-300
4"	CAB-400
6"	CAB-600



Short Shank Washers

Hose Size	Part #
3/4"	SSW-075
1"	SSW-100
1-1/4"	SSW-125
1-1/2"	SSW-150
2"	SSW-200
2-1/2"	SSW-250
3"	SSW-300
4"	SSW-400
6"	SSW-600



Short Shank Wrench

Hose Size	Part #
1-1/2"	SW-15
2"	SW-20
2-1/2"	SW-25
3"	SW-30
4"	SW-40

## FV Foot Valves & Gaskets



Foot Valves

Hose Size	Part #
1-1/2"	FV-150
2"	FV-200
2-1/2"	FV-250
3"	FV-300
4"	FV-400
6"	FV-600
8"	FV-800



Foot Valve Gaskets

Hose Size	Part #
1-1/2"	FVG-150
2"	FVG-200
2-1/2"	FVG-250
3"	FVG-300
4"	FVG-400
6"	FVG-600
8"	FVG-800

## RHS/SHS Strainers

27



**Round Hole Strainer**

Hose Size	Part #
1-1/2"	RHS-150
2"	RHS-200
2-1/2"	RHS-250
3"	RHS-300
4"	RHS-400
6"	RHS-600
8"	RHS-800



**Round Hole x Female Camlock**

Hose Size	Part #
1-1/2"	RHS-150-FC
2"	RHS-200-FC
3"	RHS-300-FC
4"	RHS-400-FC
6"	RHS-600-FC



**Square Hole Strainer**

Hose Size	Part #
1-1/2"	SHS-150
2"	SHS-200
2-1/2"	SHS-250
3"	SHS-300
4"	SHS-400
6"	SHS-600
8"	SHS-800



**Long Hole Strainer**

Hose Size	Part #
1-1/2"	LHS-150
2"	LHS-200
3"	LHS-300



**Bottom Hole Strainer**

Hose Size	Part #
1-1/2"	BHS-150
2"	BHS-200
3"	BHS-300



**Top Hole Strainer**

Hose Size	Part #
1-1/2"	THS-150
2"	THS-200
3"	THS-300



**Fish Hole Strainer**

The Department of Fisheries recommends when water is being withdrawn from a fish habitat, 1/10" is the maximum screen hole size on a strainer. The maximum fluid velocity must be limited to less than 4.33"/second by providing adequate screen area. For slow species, eel, burbot, etc. flow rates should be reduce by 1/3.



**Polyethylene Hose Strainer**

Hose Size	Part #
1-1/2"	PHS-150
2"	PHS-200
3"	PHS-300

Hose Size	Part #
3"	FHS-300
4"	FHS-400



## SQC/SNH Sandblast Couplings

### Standard Port - Sandblast Couplings



Sandblast Coupler

Hose ID	Hose OD	Hose Type	Aluminum Number	Nylon Number
1/2"	1-1/16	2 PLY	SQ05A-AL	--
1/2"	1-3/16	4 PLY	SQ05-AL	--
3/4"	1-1/2	2-4 PLY	SQ1-AL	SQ1-NY
1"	1-7/8	2-4 PLY	SQ2-AL	SQ2-NY
1-1/4"	2-5/30	4 PLY	SQ3-AL	SQ3-NY
1-1/2"	2-3/9	4 PLY	SQ4-AL	--



Nozzle Holder

Hose ID	Hose OD	Hose Type	Aluminum Number	Nylon Number
1/2"	1-1/16	2 PLY	NH05A-AL	--
1/2"	1-3/16	4 PLY	NH05-AL	--
3/4"	1-1/2	2-4 PLY	NH1-AL	NH1-NY
1"	1-7/8	2-4 PLY	NH2-AL	NH2-NY
1-1/4"	2-5/30	4 PLY	NH3-AL	NH3-NY
1-1/2"	2-3/9	4 PLY	NH4-AL	--



Tank Adapter

Size	Industry Number	Aluminum Number
1-1/4" NPT	SB1	SB1-AL
1-1/2" NPT	SB2	SB2-AL
1-1/4" NPS	SB1S	SB1S-AL



Washer

Size	Part #
Standard Port	SW

### Full Port - Sandblast Couplings



Sandblast Coupler

Hose ID	Hose OD	Hose Type	Aluminum Number
1"	1-7/8	2-4 PLY	SQ2X-AL
1-1/4"	2-5/30	4 PLY	SQ3X-AL
1-1/2"	2-3/9	4 PLY	SQ4X-AL
2"	2-7/8	4 PLY	SQ6X-AL



Nozzle Holder

Hose ID	Hose OD	Hose Type	Aluminum Number
3/4"	1-1/2	2-4 PLY	NH1-AL
1"	1-7/8	2-4 PLY	NH2-AL
1-1/4"	2-5/30	4 PLY	NH3-AL
1-1/2"	2-3/9	4 PLY	NH4-AL



Tank Adapter

Size	Industry Number	Aluminum Number
1-1/2" NPT	SB3X	SB3X-AL
2" NPT	SB4X	SB4X-AL
2" NPS	SB5	SB5-AL



Washer

Size	Part #
Full Port	SWX

## HUT(FC)      Frac Couplings

Our hose barb union is constructed of high quality forged steel. The integral hose shank is featured on both the male and female shanks. Both time and money is saved by combining the unions with the integral shanks. No more welding hammer unions to combination nipples. The union end connection is interchangeable with all major hammer union manufacturers products.

28



Figure 100 FRAC Coupling

Part #	ID
	in
HUT100-400CF-SET	4
HUT100-600CF-SET	6



Figure 206 FRAC Coupling

Part #	ID
	in
HUT206-400CF-SET	4
HUT100-600CF-SET	6



## GP/UL PH45/50 Crimp Couplings

All PH45 & PH50 couplings should be grounded to the ground wire of the hose using a staple or pin during assembly. The 3/4" & 1" insert are brass with chrome plating. The ferrules are made of aluminum.



Hose ID	Thread	PH45 Inserts & Ferrules	PH50 Inserts & Ferrules
3/4"	3/4" - Male NPT Solid	GPMC-075/GPF-075	ULMC-075 (Set)
1"	1" - Male NPT Solid	ULMC-100 (Set)	ULMC-100 (Set)
3/4"	3/4" - Male NPT Swivel	GPXC-075/GPF-075	ULXC-075 (Set)
1"	1" - Male NPT Swivel	ULXC-100 (Set)	ULXC-100 (Set)

## GP Gas Pump Fittings

All gas pump couplings should be grounded to the ground wire reinforcement of the hose using a staple or pin during assembly. The 3/4" & 1" inserts and sockets are brass with chrome plating.



Hose ID	Hose ID	Hose OD	Thread Size
GPMR-075-113	3/4"- Male NPT Solid	1.13"	3/4"
GPMR-075-125	3/4"- Male NPT Solid	1.25"	3/4"
GPMR-100-150	1" - Male NPT Solid	1.50"	1"
GPXR-075-113	3/4" - Male NPT Swivel	1.13"	3/4"
GPXR-075-125	3/4"- Male NPT Swivel	1.25"	3/4"
GPXR-100-150	1" - Male NPT Swivel	1.50"	1"

## SCM/SCF Internal Expansion Couplings - Scovill Style

Internal expansion couplings are manufactured from solid brass forgings. Ferrules are cold-drawn copper alloy. These couplings can only be installed using an internal expansion machine.

**29**



### Brass Male NPT

Hose ID	Thread Size	Standard Part Number	Long Shank Part Number
3/4"	3/4"	SCM-075	--
1"	1"	SCM-100	--
1-1/4"	1-1/4"	SCM-125	--
1-1/2"	1-1/2"	SCM-138	--
1-1/2"	1-1/2"	SCM-150	--
2"	2"	SCM-200	SCM-200A



### Brass Female NPSM

Hose ID	Thread Size	Standard Part Number	Long Shank Part Number
3/4"	3/4"	SCF-075	--
1"	1"	SCF-100	--
1-1/4"	1-1/4"	SCF-125	--
1-1/2"	1-1/2"	SCF-138	--
1-1/2"	1-1/2"	SCF-150	--
2"	2"	SCF-200	SCF-200A



### Ferrules

Hose ID	Hose OD	Hose OD	Standard Part #	Long Part #
	From:	To:		
3/4"	1-12/64"	1-14/64"	R75AS	--
3/4"	1-15/64"	1-17/64"	R75BS	--
1"	1-30/64"	1-32/64"	R1AS-A	--
1"	1-33/64"	1-35/64"	R1BS-A	--
1"	1-36/64"	1-38/64"	R1CS-A	--
1-1/4"	1-47/64"	1-50/64"	R125BS-A	--
1-1/4"	1-51/64"	1-54/64"	R125CS-A	--
1-3/8"	1-55/64"	1-58/64"	R1375DS	--
1-1/2"	2-7/64"	2-11/64"	R15CS-A	--
1-1/2"	2-12/64"	2-14/64"	R15DS-A	--
2"	2-35/64"	2-38/64"	R2BS	R2BSS-A
2"	2-39/64"	2-42/64"	R2CS	R2CSS-A

● FOR API COMPLIANT FITTINGS PLEASE CONTACT FACTORY.



## MC Fuel Hose Nozzles/Swivels

Note: Due to changes in the National Fire Prevention Code, we can no longer sell nozzles with hold open clips unless they are pressure activated. This means that nozzles with hold open clips will not work on gravity feed systems. The pressure from the pump opens a check valve allowing the fuel to flow. Pressure activated nozzles require a minimum line pressure of 17 psi to activate flow.



Part #	Description	Fuel	Thread Size	Cover Color	UL Approved
MC-N7U	Standard Nozzle	Gas	3/4" NPT	Black	Yes
MC-N3	Standard Nozzle	Diesel	1" NPT	Yellow	No
MC-N2	Heavy Duty Nozzle	Diesel	1" NPT	Yellow	Yes
MC-N7DEF	DEF Nozzle	DEF	3/4" BSP	Blue	No
MC-NTHPT	DEF Nozzle	DEF	3/4" NPT	Blue	No



Part #	Description	Compatible Nozzle
MC-G015BLACK	Splash Guard - Black	All
MC-G015BLUE	Splash Guard - Blue	All
MC-G015GREEN	Splash Guard - Green	All
MC-G015RED	Splash Guard - Red	All
MC-G015YELLOW	Splash Guard - Yellow	All



Part #	Description	Compatible Nozzle
MC-G055BLACK	Cover - Black	All
MC-G055BLUE	Cover - Blue	All
MC-G055GREEN	Cover - Green	All
MC-G055RED	Cover - Red	All
MC-G055YELLOW	Cover - Yellow	All

## MC Fuel Hose Nozzles/Swivels

29



Hose Swivel - 50 PSI Max WP

Part #	Fuel	Thread Size
RF-400-75	Gas	3/4" NPT
RF-400-10	Diesel	1" NPT



Bulk Delivery Nozzles (Pressure Activated)

Part #	Fuel	Thread Size
MC-N6	Diesel	1-1/2" NPT



Hose Swivel - 50 PSI Max WP

Part #	Material	Thread A	Thread B
MC-AWS34	Brass/Aluminum	3/4" M-NPT	3/4" F-NPT
MC-AWS10	Brass/Aluminum	1" M-NPT	1" F-NPT
MC-AWS1414	Brass/Aluminum	1-1/4" M-NPT	1-1/4" F-NPT
MC-AWS1514	Brass/Aluminum	1-1/2" M-NPT	1-1/4" F-NPT
FFS-S150	Aluminum/Aluminum	1-1/2" M-NPT	1-1/2" F-NPT
MC-AWS22	Brass/Aluminum	2" M-NPT	2" F-NPT
MC-AWSCL15	Brass/Aluminum	1-1/2" M-NPT	1-1/2" Male Camlock



Hose Swivel - 50 PSI Max WP

Part #	Material	Thread A	Thread B
MC-AC3434	Aluminum	3/4" NPT	3/4" NPT
MC-AC1034	Aluminum	1" NPT	3/4" NPT



Breakaway Valves - UL

Part #	Fuel	Thread
MC-AB34	Gas/Diesel	3/4" NPT
MC-AB1	Gas/Diesel	1" NPT

\* Rebuild kits available

\* Also available for DEF





Pipe Pictorial Index					
<b>M100</b> Female Elbow  Page 173	<b>M101</b> Female Tee  Page 173	<b>M102</b> Female Cross  Page 173	<b>M103</b> Weldable Full Coupling  Page 173	<b>M104</b> Ground Joint Union  Page 173	<b>M105</b> Female Elbow  Page 173
<b>M107</b> Malleable Coupling  Page 174	<b>M108</b> Female Cap  Page 174	<b>M109</b> Male Plug  Page 174	<b>M110</b> Reducing Bushing  Page 175	<b>M112</b> Close Nipple  Page 175	<b>M113</b> Long Nipple  Page 176-177
<b>M114</b> Weldable Half Coupling  Page 177	<b>M116</b> 90° Street Elbow  Page 178	<b>M119</b> Reducing Coupling  Page 178	<b>M124</b> 45° Street Elbow  Page 178	<b>FLT150/125</b> Threaded Flange  Page 180	<b>FLG</b> Flange Gasket  Page 180
<b>FI-BK</b> Flange Kit  Page 180	<b>HUT</b> Hammer Union  Page 181	<b>FLWR</b> Flange Reducer  Page 180	<b>FLCR</b> Flange Reducer  Page 180	<b>FLEL45</b> Flange 45°  Page 180	<b>FLEL90</b> Flange 90°  Page 180

**M-SCH 40**  
M100-16 1" 90° Degree SCH 40 Elbow

**G - Galvanized**  
G100-16 1" 90° Degree Galvanized Elbow

**MH - SCH 80**  
MH100-16 1" 90° Degree SCH 80 Elbow

**S - Stainless**  
S100-16 SS 1" 90° Degree SCH 40 Elbow

**MX - 3000 lbs**  
MX100-16 1" 90° Degree 3000 lbs Elbow





## M100 Black Iron SCH 40

30



M100

### Female 90° Elbow

Part #	Size
M100-2	1/8"
M100-4	1/4"
M100-6	3/8"
M100-8	1/2"
M100-12	3/4"
M100-16	1"
M100-20	1-1/4"
M100-24	1-1/2"
M100-32	2"
M100-40	2-1/2"
M100-48	3"
M100-64	4"
M100-96	6"



M101

### Female Tee

Part #	Size
M101-2	1/8"
M101-4	1/4"
M101-6	3/8"
M101-8	1/2"
M101-12	3/4"
M101-16	1"
M101-20	1-1/4"
M101-24	1-1/2"
M101-32	2"
M101-40	2-1/2"
M101-48	3"
M101-64	4"
M101-96	6"

### Female Cross

Part #	Size
M102-4	1/4"
M102-6	3/8"
M102-8	1/2"
M102-12	3/4"
M102-16	1"
M102-20	1-1/4"
M102-24	1-1/2"
M102-32	2"
M102-40	2-1/2"
M102-48	3"
M102-64	4"



M102



M103

### Weldable Full Couplings

Part #	Size
M103-2	1/8"
M103-4	1/4"
M103-6	3/8"
M103-8	1/2"
M103-12	3/4"
M103-16	1"
M103-20	1-1/4"
M103-24	1-1/2"
M103-32	2"
M103-40	2-1/2"
M103-48	3"
M103-64	4"
M103-96	6"

### Ground Joint Union

Part #	Size
M104-4	1/4"
M104-6	3/8"
M104-8	1/2"
M104-12	3/4"
M104-16	1"
M104-20	1-1/4"
M104-24	1-1/2"
M104-32	2"
M104-48	3"
M104-64	4"



M104



M105

### Female 45° Elbow

Part #	Size
M105-2	1/8"
M105-4	1/4"
M105-6	3/8"
M105-8	1/2"
M105-12	3/4"
M105-16	1"
M105-20	1-1/4"
M105-24	1-1/2"
M105-32	2"
M105-40	2-1/2"
M105-48	3"
M105-64	4"





## M100 Black Iron SCH 40

### Malleable Couplings



**M107**

Part #	Size
M107-2	1/8"
M107-4	1/4"
M107-6	3/8"
M107-8	1/2"
M107-12	3/4"
M107-16	1"
M107-20	1-1/4"
M107-24	1-1/2"
M107-32	2"
M107-40	2-1/2"
M107-48	3"
M107-64	4"
M107-96	6"

### Female Caps



**M108**

Part #	Size
M108-2	1/8"
M108-4	1/4"
M108-6	3/8"
M108-8	1/2"
M108-12	3/4"
M108-16	1"
M108-20	1-1/4"
M108-24	1-1/2"
M108-32	2"
M108-40	2-1/2"
M108-48	3"
M108-64	4"
M108-96	6"

### Male Plugs



**M109**

Part #	Size
M109-2	1/8"
M109-4	1/4"
M109-6	3/8"
M109-8	1/2"
M109-12	3/4"
M109-16	1"
M109-20	1-1/4"
M109-24	1-1/2"
M109-32	2"
M109-40	2-1/2"
M109-48	3"
M109-64	4"

**30**

## M100 Black Iron SCH 40

30



**M110**

### Reducing Bushing

Part #	Size	
	Male	Female
M110-4A	1/4"	1/8"
M110-6A	3/8"	1/8"
M110-6B	3/8"	1/4"
M110-8B	1/2"	1/4"
M110-8C	1/2"	3/8"
M110-12B	3/4"	1/4"
M110-12C	3/4"	3/8"
M110-12D	3/4"	1/2"
M110-16B	1"	1/4"
M110-16C	1"	3/8"
M110-16D	1"	1/2"
M110-16E	1"	3/4"
M110-20D	1-1/4"	1/2"
M110-20E	1-1/4"	3/4"
M110-20F	1-1/4"	1"
M110-24G	1-1/2"	1-1/4"
M110-24F	1-1/2"	1"
M110-24G	1-1/2"	1-1/4"
M110-32E	2"	3/4"
M110-32F	2"	1"
M110-32G	2"	1-1/4"
M110-32H	2"	1-1/2"
M110-40F	2-1/2"	1"
M110-40G	2-1/2"	1-1/4"
M110-40H	2-1/2"	1-1/2"
M110-40I	2-1/2"	2"
M110-48I	3"	2"
M110-48J	3"	2-1/2"
M110-64F	4"	1"
M110-64H	4"	1-1/2"
M110-64I	4"	2"
M110-64K	4"	3"
M110-96I	6"	2"
M110-96K	6"	3"
M110-96L	6"	4"
M110-128M	8"	6"



**M112**

### Threaded Nipple

Part #	Pipe Size	Length
M112-2	1/8"	Close
M112-4	1/4"	Close
M112-6	3/8"	Close
M112-8	1/2"	Close
M112-12	3/4"	Close
M112-16	1"	Close
M112-20	1-1/4"	Close
M112-24	1-1/2"	Close
M112-32	2"	Close
M112-40	2-1/2"	Close
M112-48	3"	Close
M112-64	4"	Close
M112-96	6"	Close
M112-128	8"	Close



## M100 Black Iron SCH 40

### Threaded Nipple

Part #	Pipe Size	Length
M113-2X1.5	1/8"	1-1/2"
M113-2X2	1/8"	2"
M113-2X2.5	1/8"	2-1/2"
M113-2X3	1/8"	3"
M113-2X3.5	1/8"	3-1/2"
M113-2X4	1/8"	4"
M113-2X4.5	1/8"	4-1/2"
M113-2X5	1/8"	5"
M113-2X5.5	1/8"	5-1/2"
M113-2X6	1/8"	6"
M113-4X1.5	1/4"	1-1/2"
M113-4X2	1/4"	2"
M113-4X2.5	1/4"	2-1/2"
M113-4X3	1/4"	3"
M113-4X3.5	1/4"	3-1/2"
M113-4X4	1/4"	4"
M113-4X4.5	1/4"	4-1/2"
M113-4X5	1/4"	5"
M113-4X5.5	1/4"	5-1/2"
M113-4X6	1/4"	6"
M113-6X1.5	3/8"	1-1/2"
M113-6X2	3/8"	2"
M113-6X2.5	3/8"	2-1/2"
M113-6X3	3/8"	3"
M113-6X3.5	3/8"	3-1/2"
M113-6X4	3/8"	4"
M113-6X4.5	3/8"	4-1/2"
M113-6X5	3/8"	5"
M113-6X5.5	3/8"	5-1/2"
M113-6X6	3/8"	6"

### Threaded Nipple

Part #	Pipe Size	Length
M113-8X1.5	1/2"	1-1/2"
M113-8X2	1/2"	2"
M113-8X2.5	1/2"	2-1/2"
M113-8X3	1/2"	3"
M113-8X3.5	1/2"	3-1/2"
M113-8X4	1/2"	4"
M113-8X4.5	1/2"	4-1/2"
M113-8X5	1/2"	5"
M113-8X5.5	1/2"	5-1/2"
M113-8X6	1/2"	6"
M113-12X1.5	3/4"	1-1/2"
M113-12X2	3/4"	2"
M113-12X2.5	3/4"	2-1/2"
M113-12X3	3/4"	3"
M113-12X3.5	3/4"	3-1/2"
M113-12X4	3/4"	4"
M113-12X4.5	3/4"	4-1/2"
M113-12X5	3/4"	5"
M113-12X5.5	3/4"	5-1/2"
M113-12X6	3/4"	6"
M113-16X2	1"	2"
M113-16X2.5	1"	2-1/2"
M113-16X3	1"	3"
M113-16X3.5	1"	3-1/2"
M113-16X4	1"	4"
M113-16X4.5	1"	4-1/2"
M113-16X5	1"	5"
M113-16X5.5	1"	5-1/2"
M113-16X6	1"	6"



M113

## M100 Black Iron SCH 40

30



**M113**

### Threaded Nipple

Part #	Pipe Size	Length
M113-20X2	1-1/4"	2"
M113-20X2.5	1-1/4"	2-1/2"
M113-20X3	1-1/4"	3"
M113-20X3.5	1-1/4"	3-1/2"
M113-20X4	1-1/4"	4"
M113-20X4.5	1-1/4"	4-1/2"
M113-20X5	1-1/4"	5"
M113-20X5.5	1-1/4"	5-1/2"
M113-20X6	1-1/4"	6"
M113-24X2	1-1/2"	2"
M113-24X2.5	1-1/2"	2-1/2"
M113-24X3	1-1/2"	3"
M113-24X3.5	1-1/2"	3-1/2"
M113-24X4	1-1/2"	4"
M113-24X4.5	1-1/2"	4-1/2"
M113-24X5	1-1/2"	5"
M113-24X5.5	1-1/2"	5-1/2"
M113-24X6	1-1/2"	6"
M113-32X2.5	2"	2-1/2"
M113-32X3	2"	3"
M113-32X3.5	2"	3-1/2"
M113-32X4	2"	4"
M113-32X4.5	2"	4-1/2"
M113-32X5	2"	5"
M113-32X5.5	2"	5-1/2"
M113-32X6	2"	6"

### Threaded Nipple

Part #	Pipe Size	Length
M113-40X3	2-1/2"	3"
M113-40X3.5	2-1/2"	3-1/2"
M113-40X4	2-1/2"	4"
M113-40X4.5	2-1/2"	4-1/2"
M113-40X5	2-1/2"	5"
M113-40X5.5	2-1/2"	5-1/2"
M113-40X6	2-1/2"	6"
M113-48X3	3"	3"
M113-48X3.5	3"	3-1/2"
M113-48X4	3"	4"
M113-48X4.5	3"	4-1/2"
M113-48X5	3"	5"
M113-48X5.5	3"	5-1/2"
M113-48X6	3"	6"
M113-64X4.0	4"	4"
M113-64X4.5	4"	4-1/2"
M113-64X5	4"	5"
M113-64X5.5	4"	5-1/2"
M113-64X6	4"	6"
M113-96X6	6"	6"
M113-96X6	6"	6"
M113-96X8	6"	8"
M113-96X12	6"	12"



**M114**

### Weldable Half Couplings

Part #	Size
M114-2	1/8"
M114-4	1/4"
M114-6	3/8"
M114-8	1/2"
M114-12	3/4"
M114-16	1"

### Weldable Half Couplings

Part #	Size
M114-20	1-1/4"
M114-24	1-1/2"
M114-32	2"
M114-40	2-1/2"
M114-48	3"
M114-64	4"



## M100 Black Iron SCH 40

### Street Elbow



M116

Part #	Size
M116-2	1/8"
M116-4	1/4"
M116-6	3/8"
M116-8	1/2"
M116-12	3/4"
M116-16	1"
M116-20	1-1/4"
M116-24	1-1/2"
M116-32	2"
M116-40	2-1/2"
M116-48	3"
M116-64	4"



M119

### Reducing Coupling

Part #	Size	
	Female	Female
M119-4A	1/4"	1/8"
M119-6A	3/8"	1/8"
M119-6B	3/8"	1/4"
M119-8A	1/2"	1/8"
M119-8B	1/2"	1/4"
M119-8C	1/2"	3/8"
M119-12B	3/4"	1/4"
M119-12C	3/4"	3/8"
M119-12D	3/4"	1/2"
M119-16B	1"	1/4"
M119-16C	1"	3/8"
M119-16D	1"	1/2"
M119-16E	1"	3/4"
M119-20B	1-1/4"	1/4"
M119-20C	1-1/4"	3/8"
M119-20D	1-1/4"	1/2"
M119-20E	1-1/4"	3/4"
M119-20F	1-1/4"	1"
M119-24D	1-1/2"	1/2"
M119-24E	1-1/2"	3/4"
M119-24F	1-1/2"	1"
M119-24G	1-1/2"	1-1/4"
M119-32E	2"	3/4"
M119-32F	2"	1"
M119-32G	2"	1-1/4"
M119-32H	2"	1-1/2"
M119-40F	2-1/2"	1"
M119-40G	2-1/2"	1-1/4"
M119-40H	2-1/2"	1-1/2"
M119-40I	2-1/2"	2"
M119-48G	3"	1-1/4"
M119-48H	3"	1-1/2"
M119-48I	3"	2"
M119-48J	3"	2-1/2"
M119-64I	4"	2"
M119-64J	4"	2-1/2"
M119-64K	4"	3"

### 45° Street Elbow



M124

Part #	Size
M124-2	1/8"
M124-4	1/4"
M124-6	3/8"
M124-8	1/2"
M124-12	3/4"
M124-16	1"
M124-20	1-1/4"
M124-24	1-1/2"
M124-32	2"
M124-40	2-1/2"
M124-48	3"

### Teflon Tape



Description	Part #
1/2" White Teflon Tape	TFT-008
1/2" Pink Teflon Tape	PTT-008

## FL Flange 150 Lbs.

30



**Threaded 150 Lbs Steel Flange (Raised Face)**

Part #	Size
FLT150-150	1-1/2"
FLT150-200	2"
FLT150-300	3"
FLT150-400	4"
FLT150-600	6"
FLT150-800	8"
FLT150-1000	10"
FLT150-1200	12"



**Threaded 300 Lbs Steel Flange (Raised Face)**

Part #	Size
FLT300-150	1-1/2"
FLT300-200	2"
FLT300-300	3"
FLT300-400	4"
FLT300-600	6"
FLT300-800	8"
FLT300-1000	10"
FLT300-1200	12"



**Floating / Lap Joint 150 Lbs Flange**

Part #	Size
FLLJ150-200	2"
FLLJ150-300	3"
FLLJ150-400	4"
FLLJ150-600	6"
FLLJ150-800	8"
FLLJ150-1000	10"
FLLJ150-1200	12"
FLT150-1200	12"



**Floating / Lap Joint 300 Lbs Flange**

Part #	Size
FLLJ300-200	1-1/2"
FLLJ300-300	2"
FLLJ300-400	3"
FLLJ300-600	4"
FLLJ300-800	6"
FLLJ300-1000	8"
FLLJ300-1200	10"
FLT300-1200	12"



**Threaded 125 Lbs Cast Flange (Flat Face)**

Part #	Size
FLT125-150	1-1/2"
FLT125-200	2"
FLT125-250	2-1/2"
FLT125-300	3"
FLT125-400	4"
FLT125-500	5"
FLT125-600	6"
FLT125-800	8"



**Red SBR  
Flange Gasket**



**Asbestos Free Fiber  
Gasket**



**Metal Ring Flange  
Gasket**



**150 lbs Flange  
Bolt Kit**

Size	Part #			
1-1/2"	FLG-150-RS	FLG-150-FG	FLG-150-MG	FL-150-BK
2"	FLG-200-RS	FLG-200-FG	FLG-200-MG	FL-200-BK
3"	FLG-300-RS	FLG-300-FG	FLG-300-MG	FL-300-BK
4"	FLG-400-RS	FLG-400-FG	FLG-400-MG	FL-400-BK
6"	FLG-600-RS	FLG-600-FG	FLG-600-MG	FL-600-BK
8"	FLG-800-RS	FLG-800-FG	FLG-800-MG	FL-800-BK
10"	FLG-1000-RS	FLG-1000-FG	FLG-1000-MG	FL-1000-BK
12"	FLG-1200-RS	FLG-1200-FG	FLG-1200-MG	FL-1200-BK



**Welded Flange Reducers (Thin)**

Part #	Size & Description
FLWR-4030	4" x 3" Flange Reducer
FLWR-6040	6" x 4" Flange Reducer
FLWR-8060	8" x 6" Flange Reducer
FLWR-1080	10" x 8" Flange Reducer
FLWR-1210	12" x 10" Flange Reducer



**Cast 150Lbs Flange Reducers (Thick)**

Part #	Size & Description
FLCR-4030	4" x 3" Flange Reducer
FLCR-6040	6" x 4" Flange Reducer
FLCR-8060	8" x 6" Flange Reducer
FLCR-1080	10" x 8" Flange Reducer
FLCR-1210	12" x 10" Flange Reducer



**Flange 45°**

Part #	Size & Description
FLEL45-4040	4" Flange 45° Elbow
FLEL45-6060	6" Flange 45° Elbow
FLEL45-8080	8" Flange 45° Elbow
FLEL45-1010	10" Flange 45° Elbow
FLEL45-1212	12" Flange 45° Elbow



**Flange 90°**

Part #	Size & Description
FLEL90-4040	4" Flange 90° Elbow
FLEL90-6060	6" Flange 90° Elbow
FLEL90-8080	8" Flange 90° Elbow
FLEL90-1010	10" Flange 90° Elbow
FLEL90-1212	12" Flange 90° Elbow





## HUT Hammer Unions

**CAUTION!**



- Mismatching components of one series with another (i.e. series 602 with series 1502) can lead to destruction of property, serious bodily injury or death.

30

**Pressure Key**

Series	Assembly Color Key	PSI
100		1000
200		2000
206		2000
602		9000
1002		15000
1502		22500

**Figure 206**



Thread Size	Part #
1"	HUT206-100
2"	HUT206-200
3"	HUT206-300
4"	HUT206-400
6"	HUT206-600

**Figure 100**



Thread Size	Part #
2"	HUT100-200
3"	HUT100-300
4"	HUT100-400
6"	HUT100-600
8"	HUT100-800
10"	HUT100-1000

**Figure 602**




Thread Size	Part #
1"	HUT602-100
1-1/2"	HUT602-150
2"	HUT602-200
3"	HUT602-300
4"	HUT602-400

**Figure 200**




Thread Size	Part #
1"	HUT200-100
1-1/4"	HUT200-125
1-1/2"	HUT200-150
2"	HUT200-200
2-1/2"	HUT200-250
3"	HUT200-300
4"	HUT200-400
6"	HUT200-600
8"	HUT200-800
10"	HUT200-1000

**Figure 1002**



Thread Size	Part #
2"	HUT1002-200
3"	HUT1002-300
4"	HUT1002-400

**Figure 1502**

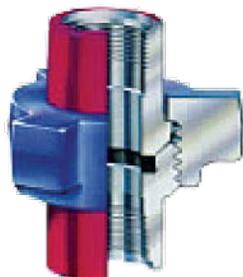

Thread Size	Part #
1"	HUT1502-100
2"	HUT1502-200
3"	HUT1502-300





## QD Industrial Interchange - Type D



Connect	Disconnect	Body Size	Female NPT	WP	Coupler Part Number	Plug Part Number
				psi		
Manual	Manual	1/4"	1/8"	300	--	QDN42FP
Manual	Manual	1/4"	1/4"	300	QDC44FP	QDN44FP
Manual	Manual	1/4"	3/8"	300	QDC46FP	QDN46FP
Manual	Manual	3/8"	1/4"	300	QDC64FP	QDN64FP
Manual	Manual	3/8"	3/8"	300	QDC66FP	QDN66FP
Manual	Manual	3/8"	1/2"	300	QDC68FP	QDN68FP
Manual	Manual	1/2"	3/8"	300	QDC86FP	QDN86FP
Manual	Manual	1/2"	1/2"	300	QDC88FP	QDN88FP
Manual	Manual	1/2"	3/4"	300	QDC812FP	QDN812FP
Automatic	Manual	1/4"	1/4"	300	QDC44FP-A	QDN44FP
Automatic	Button	1/4"	1/4"	300	QSBC44FP	QDN44FP



Connect	Disconnect	Body Size	Male NPT	WP	Coupler Part Number	Plug Part Number
				psi		
Manual	Manual	1/4"	1/8"	300	QDC42MP	QDN42MP
Manual	Manual	1/4"	1/4"	300	QDC44MP	QDN44MP
Manual	Manual	1/4"	3/8"	300	QDC46MP	QDN46MP
Manual	Manual	3/8"	1/4"	300	QDC64MP	QDN64MP
Manual	Manual	3/8"	3/8"	300	QDC66MP	QDN66MP
Manual	Manual	3/8"	1/2"	300	QDC68MP	QDN68MP
Manual	Manual	1/2"	3/8"	300	QDC86MP	QDN86MP
Manual	Manual	1/2"	1/2"	300	QDC88MP	QDN88MP
Manual	Manual	1/2"	3/4"	300	QDC812MP	QDN812MP



Connect	Disconnect	Body Size	Barb	WP	Coupler Part Number	Plug Part Number
				psi		
Manual	Manual	1/4"	1/4"	300	QDC44HB	QDN44HB
Manual	Manual	1/4"	3/8"	300	QDC46HB	QDN46HB
Manual	Manual	3/8"	1/4"	300	QDC64HB	QDN64HB
Manual	Manual	3/8"	3/8"	300	QDC66HB	QDN66HB
Manual	Manual	3/8"	1/2"	300	QDC68HB	QDN68HB
Manual	Manual	1/2"	3/8"	300	QDC86HB	QDN86HB
Manual	Manual	1/2"	1/2"	300	QDC88HB	QDN88HB
Manual	Manual	1/2"	3/4"	300	QDC812HB	QDN812HB



## QAR ARO Interchange - Type AR

*These couplers interchange with ARO 210 / 310 couplings*

31



Connect	Disconnect	Body Size	Female NPT	WP	Coupler Part Number	Plug Part Number
				psi		
Manual	Manual	1/4"	1/4"	300	QARC44FP	QARN44FP
Manual	Manual	1/4"	3/8"	300	QARC46FP	QARN46FP
Manual	Manual	3/8"	3/8"	300	QARC66FP	QARN66FP



Connect	Disconnect	Body Size	Male NPT	WP	Coupler Part Number	Plug Part Number
				psi		
Manual	Manual	1/4"	1/4"	300	QARC44MP	QARN44MP
Manual	Manual	1/4"	3/8"	300	QARC46MP	QARN46MP
Manual	Manual	3/8"	3/8"	300	QARC66MP	QARN66MP



Connect	Disconnect	Body Size	Hose Barb	WP	Coupler Part Number	Plug Part Number
				psi		
Manual	Manual	1/4"	1/4"	300	QARC44HB	QARN44HB
Manual	Manual	1/4"	3/8"	300	QARC46HB	QARN46HB





## QT Automotive Interchange - Type T

These couplers are fully interchangeable with Parker Truflate series 10.



Connect	Disconnect	Body Size	Female NPT	WP	Coupler Part Number	Plug Part Number
				psi		
Manual	Manual	1/4"	1/4"	300	QTC44FP	QTN44FP
Manual	Manual	1/4"	3/8"	300	QTC46FP	QTN46FP
Manual	Manual	3/8"	1/4"	300	QTC64FP	QTN64FP
Manual	Manual	3/8"	3/8"	300	QTC66FP	QTN66FP
Manual	Manual	3/8"	1/2"	300	QTC68FP	QTN68FP
Manual	Manual	1/2"	3/8"	300	QDC86FP	QDN86FP
Manual	Manual	1/2"	1/2"	300	QDC88FP	QDN88FP
Manual	Manual	1/2"	3/4"	300	- -	QDN812FP



Connect	Disconnect	Body Size	Male NPT	WP	Coupler Part Number	Plug Part Number
				psi		
Manual	Manual	1/4"	1/4"	300	QTC44MP	QTN44MP
Manual	Manual	1/4"	3/8"	300	QTC46MP	QTN46MP
Manual	Manual	3/8"	1/4"	300	QTC64MP	QTN64MP
Manual	Manual	3/8"	3/8"	300	QTC66MP	QTN66MP
Manual	Manual	3/8"	1/2"	300	QTC68MP	QTN68MP
Manual	Manual	1/2"	3/8"	300	QDC86MP	QDN86MP
Manual	Manual	1/2"	1/2"	300	QDC88MP	QDN88MP
Manual	Manual	1/2"	3/4"	300	QDC812MP	QDN812MP



Connect	Disconnect	Body Size	Barb	WP	Coupler Part Number	Plug Part Number
				psi		
Manual	Manual	1/4"	1/4"	300	QTC44HB	QTN44HB
Manual	Manual	1/4"	3/8"	300	QTC46HB	QTN46HB
Manual	Manual	3/8"	1/4"	300	QTC66HB	QTN66HB
Manual	Manual	3/8"	3/8"	300	QTC68HB	QTN68HB
Manual	Manual	1/2"	3/8"	300	QDC86HB	QDN86HB
Manual	Manual	1/2"	1/2"	300	QDC88HB	QDN88HB
Manual	Manual	1/2"	3/4"	300	QDC812HB	QDN812HB



## QL Long Lincoln Interchange - Type L

31



Connect	Disconnect	Body Size	Female NPT	WP	Coupler Part #	Plug Part #
				psi		
Manual	Manual	1/4"	1/4"	300	QLC44FP	QLN44FP



Connect	Disconnect	Body Size	Female NPT	WP	Coupler Part #	Plug Part #
				psi		
Manual	Manual	1/4"	1/4"	300	QLC44MP	QLN44MP

## QY Universal - Type U



Connect	Disconnect	Body Size	Female NPT	WP	Coupler Part #	Industrial	ARO	Auto
				psi				
Automatic	Manual	1/4"	1/4"	250	QUC44FP	√	√	√





Connect	Disconnect	Body Size	Female NPT	WP	Coupler Part #	Industrial	ARO	Auto
				psi				
Automatic	Manual	1/4"	1/4"	250	QUC44MP	√	√	√






## Pneumatic Profiles

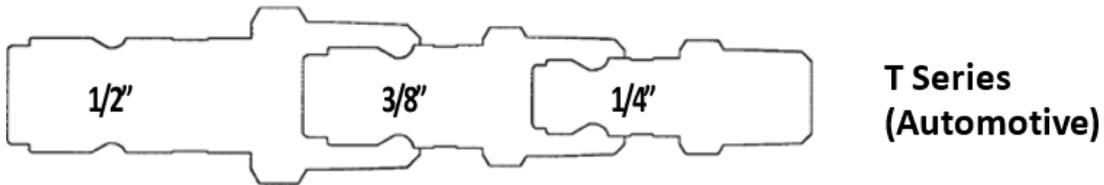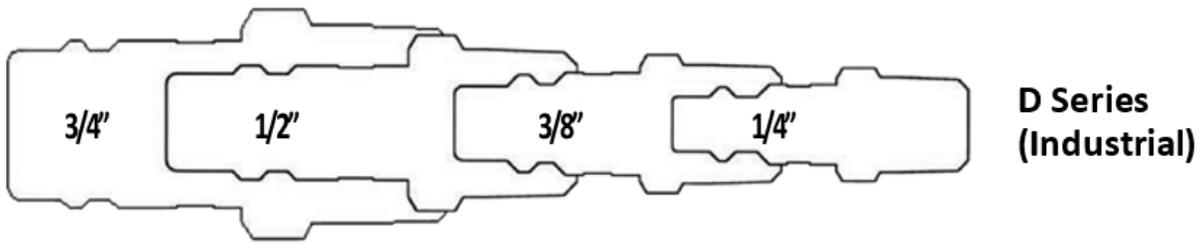

## Pressure Wash

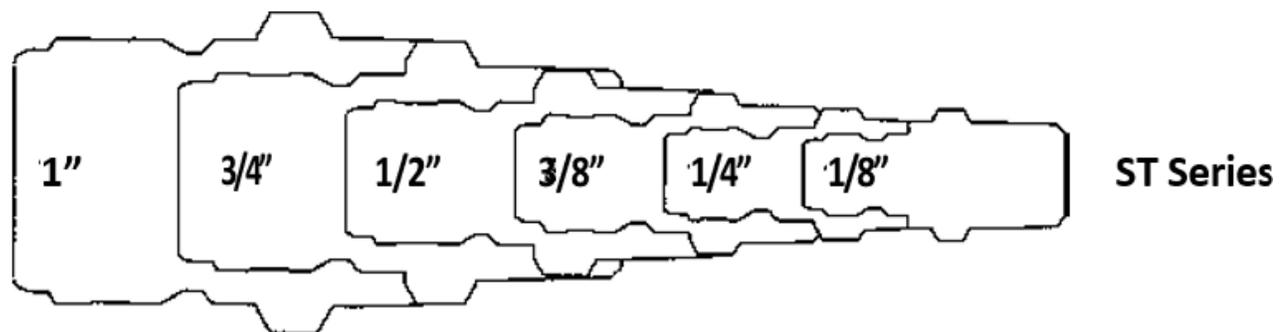



## Pneumatic Quick Disconnect - Interchange Guide

31

Forsaflex	Dixon	Parker	Eaton	Aro	Foster	Cejn	Amflo	Milton
<b>Industrial Interchange Couplers</b>								
QDC44FP	2FF2-B	B23	1000	23102-200	3003	10-310-1402	DC20	755/715
QDC46FP	2FF3-B	B23E	1200	23102-003	3203	10-310-1404	DC2023	7718
QDC64FP	3FF2	25C	400	23103-002	4004		DC2622	1833
QDC66FP	3FF3	25	420	23103-300	4204	10-430-1404	DC26	1835
QDC68FP	3FF4	25F	440	23103-004	4404	10-430-1405	DC2624	
QDC44MP	2FM2-B	B22	1100	23102-212	3103	10-310-1452	DC21	756/716
QDC46MP	2FM3-B	B22E	1300	23102-213	3303	10-310-1454	DC2103	719
QDC64MP	3FM2	24C	410	23103-012	4104		DC2502	
QDC66MP	3FM3	24	430	23103-313	4304	10-430-1454	DC25	1836
QDC68MP	3FM4	24F	450	23103-014	4504	10-430-1455	DC2504	
QDC44HB	2FS2-B	B20-3B	1600	23102-022	3603	10-310-1002	DC2042	717
QDC46HB	2FS3-B	B20-5B	1700	23102-024	3703	10-310-1003	DC2044	717-6
QDC64HB	3FS2	24-3B	4004	23103-324	4604		DC2642	
QDC66HB	3FS3	24-5B	4006	23103-025	4804	10-430-1004	DC2644	
QDC68HB	3FS4	24-6B	4008	23103-025	4904			
<b>Industrial Interchange Nipples</b>								
QDN42FP	D2F1	H1C	13	23902-100	13-3	10-310-5401	DCP2021	729
QDN44FP	D2F2	H3C	11	23902-200	11-3	10-310-5402	DCP20	728
QDN46FP	D2F3	H3C-E	15	23902-003	15-3	10-310-5404	DCP2023	732
QDN64FP	D3F2	H1E	41	23903-200	41-4	10-430-5402	DCP2622	1840
QDN66FP	D3F3	H3E	43	23903-300	43-4	10-430-5404	DCP26	1838
QDN68FP	D3F4	H3E-F	45	23903-004	45-4	10-430-5405	DCP2624	
QDN86FP	D4F3	H1F	53	23904-003	53-5	10-550-5404	DCP1823	1860
QDN88FP	D4F4	H3F	55	23904-400	55-5			1858
QDN812FP	D4F6	H3F-G	57	23904-005	57-5	10-550-5407	DCP1826	
QDN42MP	D2M1	H0C	12	23902-110	12-3	10-310-5451	DCP2101	726
QDN44MP	D2M2	H2C	10	23902-210	10-3	10-310-5452	DCP21	727
QDN46MP	D2M3	H2C-E	14	23902-310	14-8	10-310-5454	DCP2103	733
QDN64MP	D3M2	H0E	40	23903-210	40-4	10-430-5452	DCP2502	1839
QDN66MP	D3M3	H2E	42	23903-310	42-4	10-430-5154	DCP25	1837
QDN68MP	D3M4	H2E-F	44	23903-410	44-4	10-430-5455	DCP2504	
QDN86MP	D4M3	H0F	52	23904-310	52-5	10-550-5454	DCP903	1859
QDN88MP	D4M4	H2F	54	23904-410	54-5	10-550-5455	DCP9	1857
QDN812MP	D4M6	H2F-G	56	23904-510	56-5	10-550-5457	DCP906	
QDN44HB	D2S2	H8C	16	23902-220	16-3	10-310-5002	DCP2142	736
QDN45HB	D2S2.5	H8C-D						
QDN46HB	D2S3	H9C	17	23902-420	17-3	10-310-5004	DCP2144	736-6
QDN64HB	D3S2	H4E	404		46-4			
QDN66HB	D3S3	H5E	406	23903-420	48-4	10-430-5002	DCP2544	
QDN68HB	D3S4	H6E	408	23903-520	49-4	10-430-5003	DCP2545	
QDN86HB	D4S3	H4-F	59	23904-420	59-5	10-550-5004	DCP1744	
QDN88HB	D4S4	H5-F	60	23904-520	60-5	10-550-5005	DCP1745	
QDN812HB	D4S6	H5F-G	61	23904-620	61-5	10-550-5007	DCP1746	






## Pneumatic Quick Disconnect - Interchange Guide

31

Forsaflex	Dixon	Parker	Eaton	Aro	Foster	Cejn	Amflo	Milton
<b>Lincoln Interchange Couplers</b>								
QLC44MP	2LM2-B	B72		LNCM20	LN3103		DC27	
QLC44FP	2LF2-B	B73		LNCF22	LN3003		DC28	790
<b>Lincoln Interchange Nipples</b>								
QLN44FP	L2F2			LNPF22				
QLN44MP	L2M2	L2C		LNPM20	LN11		DCP27	791
<b>Universal Interchange Couplers</b>								
QUC44FP	2UF2-B	RF-251-4FP					UDC20	
QUC66FP	3UF3-B							
QUC46FP	2UF3-B	RF-251-6FP					UDC2023	
QUC46MP	2UM3-B	RF-251-6MP					UDC2103	
QUC44MP	2UM2-B	RF-251-4MP					UDC21	

Forsaflex	Dixon	Parker	Eaton	Aro	Foster	Cejn	Amflo	Milton
<b>ARO Interchange Couplers</b>								
QARC44FP	2MF2-B							
QARC66FP	3MF3-PL			310	310-4204		DC36	
QARC46FP	2MF3-B	B53E		210-203	210-3203		DC3823	
QARC44MP	2MM2-B	B52	20AS-25M	210-212	210-3103		DC37	
QARC46MP	2MM3-B	B52E			210-3303		DC3703	
QARC66MP	3MM3-PL			310-313	310-4304		DC35	
QARC44HB	2MS2-B	B50-3B		210-022	210-3603		DC3842	
QARC46HB	2MS3-B	B50-5B		210-215	210-3703		DC3844	
<b>ARO Interchange Nipples</b>								
QARN44FP	M2F2	A3C	1G2	2609	210-11	10-300-5402	DCP38	778
QARN66FP	M3F3			3806	310-43		DCP36	
QARN44MP	M2M2	A2C	1G3	2608	210-10	10-300-5452	DCP37	777
QARN66MP	M3M3			3804	310-42		DCP35	
QARN44HB	M2S2	A8C		3946	210-16	10-300-5002	DCP3742	777-4
QARN46HB	M2S3			22238	210-17		DCP3744	
QARN66HB	M3S3			3807				
<b>Automotive Interchange Couplers</b>								
QTC44FP	2JF2-B	B13	23AS-25F	TFCF22	TF11		DC2	785/787
QTC46FP	2JF3-B	B13E	23AS-37F	TFCF23	TF15		DC223	788
QTC66FP	3JF3	15		TFCF33	TF4204		DC6	1805
QTC68FP	3JF4	15F			TF4404		DC624	
QTC44MP	2JM2-B	B12	23AS-25M	TFCM22	TF3103		DC1	786
QTC46MP	2JM3-B	B12E	23AS-37M	TFCM23	TF3303		DC103	789
QTC64MP	3JM2	14C		TFCM32	TF4104		DC7	
QTC66MP	3JM3	14		TFCM33	TF4304		DC5	1806
QTC68MP	3JM4	14F			TF4504		DC504	
QTC44HB	2JS2-B	B10-3B	23AS-25H	TFCH22	TF3603		DC242	786-4
QTC46HB	2JS3-B	B10-5B	23AS-37H	TFCH23	TF3703		DC244	786-6
QTC66HB	3JS3	14-5B		TFCH33	TF4804		DC644	1806-6





## Pneumatic Quick Disconnect - Interchange Guide

Forsaflex	Dixon	Parker	Eaton	Aro	Foster	Cejn	Amflo	Milton
<b>Automotive Interchange Nipples</b>								
QTN44FP	J2F2	3C	21AP-25F	TFPF22	TF3003		DCP2	784
QTN46FP	J2F3	3C-E	21AP-37F	TFPF23	TF3203		DCP223	
QTN64FP	J3F2	1E		TFPF32	TF41		DCP8	1810
QTN66FP	J3F3	3E		TFPF33	TF43		DCP6	1808
QTN86FP	J4F3	1F	53	TFPF43	53-5		DCP1023	1820
QTN88FP	J4F4	3F	55	TFPF44	55-5		DCP10	1818
QTN44MP	J2M2	2C	21AP-25M	TFPM22	TF10		DCP1	783
QTN46MP	J2M3	2C-E	21AP-37M	TFPM23	TF14		DCP103	
QTN64MP	J3M2	0E		TFPM32	TF40		DCP7	1809
QTN66MP	J3M3	2E		TFPM33	TF42		DCP5	1807
QTN86MP	J4M3	10F	52	TFPM43	52-5		DCP903	1819
QTN88MP	J4M4	2F	54	TFPM44	54-5		DCP9	1817
QTN44HB	J2S2	8C	21AP-25H	TFPH22	TF16		DCP142	783-4
QTN46HB	J2S3	9C	21AP-37H	TFPH23	TF17		DCP144	783-6

31



# BV Ball Valves

**CSA Brass - Full Port**



Size	Part #	WP
		psi
1/4"	BV-025BRN	600
3/8"	BV-038BRN	600
1/2"	BV-050BRN	600
3/4"	BV-075BRN	600
1"	BV-100BRN	600
1-1/4"	BV-125BRN	600
1-1/2"	BV-150BRN	600
2"	BV-200BRN	600
2-1/2"	BV-250BRN	400
3"	BV-300BRN	400
4"	BV-400BRN	400

**316 Stainless Steel - Full Port**



Size	Part #	WP
		psi
1/4"	BV-025SSN	2000
3/8"	BV-038SSN	2000
1/2"	BV-050SSN	2000
3/4"	BV-075SSN	2000
1"	BV-100SSN	2000
1-1/4"	BV-125SSN	2000
1-1/2"	BV-150SSN	2000
2"	BV-200SSN	2000
3"	BV-300SSN	2000

**32**

**CSA Brass - Locking Handle  
(Locks In The Closed Position Only)**



Size	Part #	WP
		psi
1/4"	BV-025BRN-LH	600
3/8"	BV-038BRN-LH	600
1/2"	BV-050BRN-LH	600
3/4"	BV-075BRN-LH	600
1"	BV-100BRN-LH	600
1-1/4"	BV-125BRN-LH	600
1-1/2"	BV-150BRN-LH	600
2"	BV-200BRN-LH	600
3"	BV-300BRN-LH	400
4"	BV-400BRN-LH	400

**Carbon Steel - Reduced Port**



Size	Part #	WP
		psi
1/4"	BV-025CS	2000
3/8"	BV-038CS	2000
1/2"	BV-050CS	2000
3/4"	BV-075CS	2000
1"	BV-100CS	2000
1-1/4"	BV-125CS	2000
1-1/2"	BV-150CS	2000
2"	BV-200CS	2000

**Dual Y Valve (Vented)**



Size		Part #	WP
Inlet	Outlet x 2		psi
1"	3/4"	DTBV-16-12	125
1 1/4"	3/4"	DTBV-20-12	125

## BV-HPN High Pressure Ball Valves

32



(NPT Thread)

Size	Part #	WP
		psi
1/4"	BV-025HPN	7250
3/8"	BV-038HPN	7250
1/2"	BV-050HPN	7250
3/4"	BV-075HPN	5800
1"	BV-100HPN	5075
1-1/4"	BV-125HPN	5075
1-1/2"	BV-150HPN	5075
2"	BV-200HPN	5075



(HPSAE Thread)

Size	Part #	WP
		psi
1/4"	BV-025HPSAE	7250
3/8"	BV-038HPSAE	7250
1/2"	BV-050HPSAE	7250
3/4"	BV-075HPSAE	5800
1"	BV-100HPSAE	5075
1-1/4"	BV-125HPSAE	5075
1-1/2"	BV-150HPSAE	5075
2"	BV-200HPSAE	5075



3-Way (NPT Thread) L Port

Size	Part #	WP
		psi
1/4"	BV-025HPN-3W	7250
3/8"	BV-038HPN-3W	7250
1/2"	BV-050HPN-3W	7250
3/4"	BV-075HPN-3W	5800
1"	BV-100HPN-3W	5075
1-1/4"	BV-125HPN-3W	5075
1-1/2"	BV-150HPN-3W	5075
2"	BV-200HPN-3W	5075



3-Way (SAE Thread) L Port

Size	Part #	WP
		psi
1/4"	BV-025HPNSAE-3W	7250
3/8"	BV-038HPNSAE-3W	7250
1/2"	BV-050HPNSAE-3W	7250
3/4"	BV-075HPNSAE-3W	5800
1"	BV-100HPNSAE-3W	5075
1-1/4"	BV-125HPNSAE-3W	5075
1-1/2"	BV-150HPNSAE-3W	5075
2"	BV-200HPNSAE-3W	5075

## LGV/SGV Lever/Stem Valves

Handle  
Included



(NPT Thread)	
Part #	Size
LGV-200BR	2
LGV-300BR	3
LGV-400BR	4
LGV-600BR	6

(NPT Thread)	
Part #	Size
LGV-200H	2
LGV-300H	3
LGV-400H	4
LGV-600H	6

(NPT Thread)	
Part #	Size
N/A	2
N/A	3
LGV-400P	4
LGV-600P	6

Handle not  
Included



Double Hex	
Part #	Size
SGV-400BR	4
SGV-600BR	6
SGV-800BR	8

Handle	
Part #	Size
SGV-400H	4
SGV-600H	6
SGV-800H	8

Replacement Gates	
Part #	Size
SGV-400P	4
SGV-600P	6
N/A	8

Linear Air Actuators	
Part #	Size
SGV-400A	4
SGV-600A	6
N/A	8



Single Hex	
Part #	Size
SGV-400A	4
SGV-600A	6
N/A	8

Handle	
Part #	Size
SGV-400H	4
SGV-600H	6
SGV-800H	8

Replacement Gates Single Hex	
Part #	Size
SGV-400P-1	4
SGV-600P-1	6
N/A	8

Linear Air Actuators	
Part #	Size
SGV-400A	4
SGV-600A	6
N/A	8

## CVA/GVA Check Valves/Gate Valves



Check Valve

Part #	Size
CVA-050BR	1/2
CVA-075BR	3/4
CVA-100BR	1
CVA-125BR	1-1/4
CVA-150BR	1-1/2
CVA-200BR	2
CVA-250BR	2-1/2
CVA-300BR	3



Gate Valve

Part #	Size
GVA-025BR	1/4
GVA-038BR	3/8
GVA-050BR	1/2
GVA-075BR	3/4
GVA-100BR	1
GVA-125BR	1-1/4
GVA-150BR	1-1/2
GVA-200BR	2
GVA-250BR	2-1/2
GVA-300BR	3
GVA-400BR	4

## FL Flanged Valves

32

### FLGV Flanged Gate Valve



Part #	Size
FLGV-400	4"
FLGV-600	6"
FLGV-800	8"
FLGV-1000	10"
FLGV-1200	12"

### FLKGV

### Flanged Knife Gate Valve



Part #	Size
FLKGV-400	4"
FLKGV-600	6"
FLKGV-800	8"
FLKGV-1000	10"
FLKGV-1200	12"

### FLCV Flanged Check Valve



Part #	Size
FLCV-400-CS	4"
FLCV-600-CS	6"
FLCV-800-CS	8"
FLCV-1000-CS	10"
FLCV-1200-CS	12"

### FLBFW

### Butterfly Wafer Style Valve



Part #	Size
FLBFW-300	3"
FLBFW-400	4"
FLBFW-600	6"
FLBFW-800	8"
FLBFW-1000	10"
FLBFW-1200	12"
FLBFW-1600	16"

### FMB Flow Meter

150 lbs Flanged Modbus  
Magnetic Flow Meter



Part #	Size
FMB-300FF	3"
FMB-400FF	4"
FMB-600FF	6"
FMB-800FF	8"
FMB-1000FF	10"
FMB-1200FF	12"

### FLBFL

### Butterfly Valve Lug Style



Part #	Size
FLBFL-400	4"
FLBFL-600	6"
FLBFL-800	8"

\*Standard ductile iron disc & buna seat.  
Other materials available on request.



# CHEMICAL RESISTANCE GUIDE

## Chemical Resistance Guide @ 70 °F/20 °C

RATING DEFINITIONS	X=DO NOT USE																				A=CONTINUOUS SERVICE										B=INTERMITTENT USE										I=INSUFFICIENT DATA									
	HOSE MATERIAL																				COUPLING MATERIAL										GASKET MATERIAL																			
	NITRILE	EPDM	SBR	VITON	NATURAL	HYPALON	BUTYL	PVC	TPU	TPR	UHMWPE	XLPE	TEFLON	304SS	316SS	ALUMINUM	BRASS	NYLON	POLYPROPYLENE	TEFLON	VITON	BUNA	EPDM																											
Acetaldehyde	X	A	X	X	X	X	B	X	X	X	B	A	A	A	A	B	X	A	A	A	X	X	A																											
Acetic Acid, Conc.	X	A	I	X	B	X	A	B	X	I	A	A	A	I	A	B	X	I	I	A	X	X	A																											
Acetic Acid, Dilute 10	X	A	I	X	A	X	A	A	B	I	B	A	A	I	A	I	X	I	I	A	X	X	A																											
Acetic Acid, Glacial	X	A	X	X	X	X	B	B	X	X	A	A	A	A	B	X	X	A	A	X	X	A																												
Acetic Aldehyde	X	A	I	X	X	X	B	X	I	X	A	A	A	I	A	B	X	I	I	A	X	X	A																											
Acetic Anhydride	X	A	X	X	X	B	A	X	X	X	B	A	A	A	B	X	X	A	A	X	X	A																												
Acetic Ester	X	A	I	X	X	X	B	X	X	B	B	A	A	I	A	A	I	I	A	X	X	A																												
Acetic Ether	X	A	I	X	X	X	B	X	X	I	B	A	A	I	A	A	A	I	I	A	X	X	A																											
Acetic Oxide	X	A	I	X	X	B	A	I	I	I	B	A	A	I	A	B	X	I	I	A	X	X	A																											
Acetone	X	A	A	X	B	X	A	X	X	B	A	A	A	A	A	I	A	A	A	X	X	A																												
Acetone Cyanohydrin	X	A	I	X	X	X	A	X	X	I	B	A	A	I	I	I	I	I	A	X	X	A																												
Acetyl Acetone	X	I	X	X	X	X	B	X	X	I	B	A	A	I	I	B	I	I	I	A	X	X	I																											
Acetyl Chloride	X	8	X	B	X	X	X	I	X	X	B	B	A	8	B	X	A	I	I	A	B	X	8																											
Acetyl Oxide	X	A	I	X	X	8	A	I	I	I	B	A	A	I	A	B	X	I	I	A	X	X	A																											
Acetylene (dry)	A	A	I	A	A	A	A	I	I	I	A	A	A	I	A	I	I	I	I	A	A	A	A																											
Acetylene Dichloride	X	I	I	A	X	X	X	X	I	X	B	A	A	I	I	A	X	I	I	A	A	X	I																											
Acetylene Tetrachloride	X	I	I	A	X	X	X	X	I	I	B	A	A	I	A	X	X	I	I	A	A	X	I																											
Acrolein	B	I	I	A	B	8	A	I	I	I	B	A	A	I	I	I	I	I	I	A	A	B	I																											
Acrylic Acid	X	X	I	A	X	X	X	I	I	I	B	A	A	I	A	I	I	I	I	A	A	X	X																											
Acrylonitrile	X	X	X	X	X	X	X	A	A	I	B	B	A	A	A	X	I	I	A	A	X	X	X																											
Alk-Tri	X	I	I	A	X	X	X	I	I	I	I	A	A	I	A	I	I	I	I	A	A	X	I																											
Allyl Alcohol	A	A	A	B	A	A	A	X	X	X	A	A	A	I	A	I	A	I	I	A	B	A	A																											
Allyl Bromide	X	I	X	B	X	X	X	X	X	I	B	B	A	I	I	I	I	I	I	A	B	X	I																											
Allyl Chloride	X	X	X	B	X	X	X	X	X	I	B	B	A	I	A	X	X	I	I	A	B	X	X																											
Aluminum	A	A	I	A	A	A	A	A	A	B	A	A	A	I	A	I	X	I	I	A	A	A	A																											
Aluminum Acetate	X	A	B	X	X	A	A	I	I	I	A	A	A	I	A	I	X	I	I	A	X	X	A																											
Aluminum Chloride	A	A	A	A	A	A	A	A	A	B	A	A	A	X	I	I	X	X	A	A	A	A	A																											
Aluminum Formate	X	I	I	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I																											
Aluminum Hydroxide	B	A	A	X	A	B	A	A	A	I	A	A	A	A	A	I	X	A	A	A	X	B	A																											
Aluminum Sulfate	A	A	A	A	A	A	A	A	A	B	A	A	A	B	A	X	X	A	A	A	A	A	A																											
Aminoethanol	B	I	I	I	B	8	A	I	I	I	A	A	A	I	A	B	I	I	I	A	I	B	I																											
Aminoethylethanolamine	B	I	I	I	B	B	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I																											
Ammonia Cupric Sulfate	A	A	I	A	X	A	A	X	I	I	A	A	A	I	I	I	I	I	I	A	A	A	A																											
Ammonium Chloride	A	A	A	A	A	A	A	A	A	B	A	A	A	A	A	X	X	A	A	A	A	A	A																											
Ammonium Hydroxide	X	X	A	X	A	8	A	B	B	B	A	A	A	A	X	I	A	A	A	X	X	X																												
Ammonium Nitrate										N/R																																								
Ammonium Phosphate	A	A	A	A	A	A	A	I	I	B	A	A	A	I	A	X	X	A	A	A	A	A	A																											
Ammonium Sulfate	X	A	A	A	A	A	A	A	A	B	A	A	A	X	A	X	X	A	A	A	X	A																												
Ammonium Sulfide	X	A	A	A	A	A	A	A	A	I	A	A	A	I	A	X	X	I	I	A	A	X	A																											
Ammonium Sulfite	A	A	A	A	A	A	A	A	A	I	A	A	A	I	A	X	I	I	I	A	A	A	A																											
Ammonium Thiosulfate	A	A	A	A	A	A	A	A	A	I	A	A	A	I	A	B	X	I	I	A	A	A	A																											
Amyl Acetate	X	B	X	X	X	B	A	X	X	X	A	A	A	I	A	A	I	I	I	A	X	X	B																											
Amyl Alcohol	A	A	A	B	A	A	A	B	B	X	A	A	A	A	A	I	A	A	A	A	B	A	A																											
Amyl Chloride	X	X	X	A	X	X	X	X	X	X	A	A	A	B	A	X	I	B	X	A	A	X	X																											
Amyl Oleate	B	I	X	I	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I																											
Amyl Phenol	X	I	X	A	X	X	X	X	I	I	A	A	A	I	I	I	I	I	I	A	A	X	I																											
Amyl Phthalate	X	I	I	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I																											
Amylamine	X	X	A	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	X																											
Anethole	X	I	X	B	X	X	X	I	I	I	X	A	I	I	I	I	I	I	I	A	B	X	I																											
Anhydrous Ammonia										N/R					B	A	A	X	A	X																														
Aniline	X	A	X	A	X	X	A	I	I	I	A	A	A	A	B	X	X	X	A	A	X	A																												
Animal Grease	A	X	X	A	X	X	X	A	A	I	A	A	A	I	A	A	I	I	I	A	A	A	X																											
Animal Oils	A	X	X	A	X	X	B	A	A	X	A	A	A	I	A	A	I	I	I	A	A	A	X																											
Antimony Pentachloride	X	X	X	I	X	X	X	I	I	I	A	B	A	I	I	I	I	I	I	A	I	X	X																											
Aqua Ammonia	B	B	I	A	A	B	A	B	I	I	A	A	A	I	A	X	I	I	I	A	A	8	B																											
Aromatic Spirits	X	X	I	A	X	X	X	I	I	I	A	A	A	I	A	I	I	I	I	A	A	X	X																											
Aromatic Tar	X	X	I	A	X	X	X	X	X	I	A	A	A	I	I	I	I	I	I	A	A	X	X																											
Arquads	A	A	I	A	A	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	A	A	A																											
Arsenic Acid	X	A	A	I	A	A	A	A	I	A	A	A	A	A	X	X	X	A	A	I	X	A																												
Arsenic Chloride	X	X	X	X	X	X	X	A	A	I	I	X	A	I	I	I	I	I	I	A	X	X	X																											
Arsenic Trichloride	X	X	X	X	X	X	X	A	A	I	I	X	A	I	X	I	I	I	I	A	X	X	X																											
Asphalt										CALL																																								





## CHEMICAL RESISTANCE GUIDE @ 70°F/20°C

**RATING DEFINITIONS**

**X=DO NOT USE**

**A=CONTINUOUS SERVICE**

**B=INTERMITTENT USE**

**I=INSUFFICIENT DATA**

### CHEMICAL RESISTANCE GUIDE

	HOSE MATERIAL													COUPLING MATERIAL					GASKET MATERIAL				
	NITRILE	EPDM	SBR	VITON	NATURAL	HYPALON	BUTYL	PVC	TPU	TPR	UHMWPE	XLPE	TEFLON	304SS	316SS	ALUMINUM	BRASS	NYLON	POLYPROPYLENE	TEFLON	VITON	BUNA	EPDM
ASTM #1 Oil	A	X	X	A	X	B	X	A	A	X	A	A	A	I	A	A	I	I	I	A	A	A	X
ASTM #2 Oil	A	X	X	A	X	X	X	A	A	X	A	A	A	I	A	A	A	I	I	A	A	A	X
ASTM #3 Oil	A	X	X	A	X	X	X	A	A	X	A	A	A	I	A	A	A	I	I	A	A	A	X
Barium Carbonate	A	A	A	A	A	A	A	A	A	I	A	A	A	A	A	X	I	A	A	A	A	A	A
Barium Chloride	A	A	A	A	A	A	A	A	A	I	A	A	A	X	A	X	I	A	A	A	A	A	A
Barium Hydroxide	A	A	A	B	A	A	A	A	A	I	A	A	A	B	A	X	X	A	A	A	B	A	A
Barium Sulfate	A	A	A	A	A	A	A	A	A	I	A	A	A	A	B	A	X	A	A	A	A	A	A
Barium Sulfide	A	A	A	A	A	A	A	A	A	I	A	A	A	I	A	X	X	A	A	A	A	A	A
Benzal Chloride	X	I	I	I	I	I	B	I	I	I	A	A	A	I	B	X	I	I	I	A	I	X	I
Benzaldehyde	X	B	X	X	X	X	B	X	X	X	A	A	A	A	A	B	I	X	X	A	X	X	B
Benzene (Benzol)	X	X	X	A	X	X	X	X	X	X	A	A	A	I	A	A	A	I	I	A	A	X	X
Benzine (Ligroin)	A	X	I	A	X	X	X	X	X	X	A	A	A	I	A	A	I	I	I	A	A	A	X
Benzine Solvent (Ligroin)	A	X	X	A	X	X	X	X	X	X	A	A	A	I	A	A	I	I	I	A	A	A	X
Benzoic Acid	I	B	X	I	X	B	B	A	B	B	A	A	A	A	B	B	X	X	X	A	I	I	B
Benzoic Aldehyde	X	B	X	X	X	X	B	X	I	I	A	A	A	I	A	I	B	I	I	A	X	X	B
Benzoic Chloride	X	X	X	I	I	I	I	X	I	I	X	X	A	I	I	I	I	I	I	A	I	X	X
Benzoyl Chloride	X	X	X	I	I	I	I	X	I	I	X	B	A	I	B	I	I	I	I	A	I	X	X
Benzyl Acetate	X	I	X	X	X	B	A	X	I	I	A	A	A	I	B	I	I	I	I	A	X	X	I
Benzyl Alcohol	X	X	A	A	X	X	A	I	I	I	A	A	A	A	A	B	I	A	A	A	A	X	X
Benzyl Chloride	X	X	X	A	X	X	X	X	I	I	A	A	A	I	A	X	X	I	I	A	A	X	X
Bichromate of Soda	I	I	X	I	I	X	A	A	I	I	A	A	A	I	I	I	I	I	I	A	I	I	I
Black Sulfate Liquor	B	B	A	B	B	B	X	A	A	I	A	A	A	I	A	X	X	I	I	A	B	B	B
Black Sulfate Liquor	X	X	A	X	X	X	X	A	A	I	X	X	A	I	A	X	X	I	I	A	X	X	X
Bleach	X	A	I	B	X	X	B	A	A	B	X	X	A	I	X	X	X	X	A	A	B	X	A
Brine	A	A	A	A	A	A	A	A	A	B	A	A	A	I	A	X	I	X	A	A	A	A	A
Bromine	X	X	X	B	X	X	X	X	X	X	X	X	A	I	X	X	X	X	A	B	X	X	X
Bromo Benzene	X	X	I	B	X	X	X	X	I	X	B	X	A	I	I	I	I	I	I	A	B	X	X
Bromo Toluene	X	X	I	B	X	X	X	X	I	I	X	X	A	I	I	I	I	I	I	A	B	X	X
Bromochloromethane	X	I	I	B	X	X	B	X	I	X	X	X	A	I	A	X	X	I	I	A	B	X	I
Bunker C.	A	X	I	A	X	X	X	I	I	I	B	A	A	I	A	I	I	I	I	A	A	A	X
Bunker Oil	A	X	X	A	X	X	X	I	I	I	B	X	A	I	A	I	I	I	I	A	A	A	X
Butanol	A	A	I	B	A	A	A	X	I	B	A	A	A	A	A	I	I	I	I	A	B	A	A
Butyl Normal Alcohol	A	A	I	B	A	A	A	X	I	B	A	A	A	I	A	I	I	I	I	A	B	A	A
Butyl Secondary Alcohol	A	A	I	B	A	A	A	X	I	B	A	A	A	I	A	I	I	I	I	B	A	A	A
Butyl Acetate	X	B	X	X	X	B	A	X	X	X	A	A	A	I	A	B	I	I	X	A	X	X	B
Butyl Acetoacetate	X	I	I	X	X	X	X	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Butyl Acrylate	X	X	X	X	X	X	X	X	I	I	B	B	A	I	I	I	I	I	I	A	X	X	X
Butyl Alcohol	A	A	I	B	A	A	A	A	A	B	A	A	A	A	A	I	I	A	A	A	B	A	A
Butyl Aldehyde	X	X	I	X	X	X	B	I	I	I	A	A	A	I	X	A	X	I	I	A	X	X	X
Butyl Amine	X	X	I	X	X	X	B	I	I	I	A	A	A	I	A	A	I	I	I	A	X	X	X
Butyl Benzene	X	X	X	A	X	X	X	X	I	I	A	A	A	A	I	I	I	I	I	A	A	X	X
Butyl Benzi Phthalate	X	I	I	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Butyl Bromide	X	X	X	B	X	X	X	X	I	I	B	B	A	I	I	I	I	I	I	A	B	X	X
Butyl Butyrate	X	I	X	X	X	X	X	X	I	I	B	B	A	I	I	I	I	I	I	A	X	X	I
Butyl Carbitol	X	B	X	I	X	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	X	B
Butyl Cellosolve	X	A	X	X	X	A	A	I	I	I	A	X	A	I	A	A	X	I	I	A	X	X	A
Butyl Chloride	X	I	X	A	X	X	X	X	I	I	B	B	A	I	B	I	I	I	I	A	A	X	I
Butyl Ether	B	X	X	X	X	B	X	I	I	I	A	A	A	I	A	I	I	I	I	A	X	B	X
Butyl Ethyl Acetaldehyde	X	I	X	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Butyl Ethyl Ether	B	X	X	I	X	B	X	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	X
Butyl Phthalate	X	I	X	X	X	X	A	X	I	X	A	A	A	I	A	A	I	I	I	A	X	X	I
Butyl Stearate	A	X	X	I	X	X	X	I	I	I	A	A	A	I	A	A	A	I	I	A	I	A	X
Butylate	I	A	I	I	I	I	I	I	I	I	A	I	I	I	I	I	I	I	I	I	I	I	A
Butylaldehyde	X	X	X	X	X	X	B	I	I	I	A	A	A	I	X	A	X	I	I	A	X	X	X
Butyric Acid	X	B	X	I	X	B	X	X	I	I	A	A	A	A	A	B	I	X	A	A	I	X	B
Butyric Anhydride	X	I	X	I	X	B	X	I	I	I	A	A	A	I	I	I	I	I	I	A	I	X	I
Cadmium Acetate	X	I	I	X	X	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Calcium Acetate	X	A	X	X	X	A	A	A	I	I	A	A	A	I	A	I	I	I	I	A	X	X	A
Calcium Aluminate	A	A	I	A	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	A	A	A
Calcium Bichromate	I	I	I	I	I	X	A	A	I	I	X	X	A	I	I	I	I	I	I	A	I	I	I
Calcium Bisulfate	A	A	A	A	A	A	A	A	I	I	A	A	A	X	A	X	X	X	A	A	A	A	A
Calcium Bisulfite	A	A	A	A	A	A	A	A	A	I	A	I	A	A	A	X	X	X	A	A	A	A	A





# CHEMICAL RESISTANCE GUIDE

## CHEMICAL RESISTANCE GUIDE @ 70 ° F/20 ° C

CHEMICAL RESISTANCE GUIDE	RATING DEFINITIONS																							
	X=DO NOT USE					A=CONTINUOUS SERVICE							B=INTERMITTENT USE					I=INSUFFICIENT DATA						
	HOSE MATERIAL										COUPLING MATERIAL					GASKET MATERIAL								
	NITRILE	EPDM	SBR	VITON	NATURAL	HYPALON	BUTYL	PVC	TPU	TPR	UHMWPE	XLPE	TEFLON	304SS	316SS	ALUMINUM	BRASS	NYLON	POLYPROPYLENE	TEFLON	VITON	BUNA	EPDM	
Calcium Carbonate	A	A	A	A	A	A	A	A	A	I	A	A	A	A	A	I	X	A	A	A	A	A	A	
Calcium Chloride	A	A	A	A	A	A	A	A	A	I	A	A	A	A	B	X	X	A	A	A	A	A	A	
Calcium Hydroxide (Caustic Lime)	B	A	I	X	A	B	A	A	A	I	A	A		I	A	X	X	A	A		X	B	A	
Calcium Hypochlorite	X	B	X	B	X	X	B	A	A	I	B	X	A	X	A	X	X	X	A		A	B	X	B
Calcium Nitrate	A	A	A	A	A	A	A	A	A	I	A	A	A	I	B	X	X	I	I	A	A	A	A	A
Calcium Silicate	A	A	I	A	A	A	A	A	A	I	A	A	A	I	I	A	I	I	A	A	A	A	A	A
Calcium Sulfate	A	A	A	A	A	A	A	A	A	I	A	A	A	A	A	I	I	A	A	A	A	A	A	A
Calcium Sulfhydrate	A	A	I	A	A	A	A	I	I	I	A	A	A	I	I	I	I	I	A	A	A	A	A	A
Calcium Sulfide	A	A	A	A	A	A	A	A	A	I	A	A	A	I	A	X	X	I	I	A	A	A	A	A
Calcium Sulfite	A	A	A	A	X	A	A	A	A	I	A	A	A	I	B	B	X	I	I	A	A	A	A	A
Caprylic Acid	X	A	I	I	X	B	X	I	I	I	A	A	A	I	B	I	X	I	I	A	I	X	I	I
Carbitol	X	A	X	I	X	A	A	I	I	I	A	A	A	I	B	A	X	I	I	A	I	X	A	A
Carbitol Acetate	X	A	X	I	X	B	B	I	I	I	A	A	A	I	I	I	I	I	A	I	X	I	I	I
Carbolic Acid, Phenol	X	A	I	A	X	X	A	X	X	X	A	A	A	I	A	B	A	I	I	A	A	X	X	X
Carbon Dioxide	A	A	A	A	A	A	A	A	A	B	A	A	A	I	A	B	I	I	I	A	A	A	A	A
Carbon Disulfide											N/R				B	B	A	X	A	X				
Carbon Tetrachloride	X	X	X	A	X	X	X	X	X	X	B	A	A	A	A	I	I	A	X	A	A	A	X	X
Carbonic Acid	A	A	A	A	A	A	A	A	I	I	A	A	A	A	A	B	B	X	A	A	A	A	A	A
Casinghead Gasoline	A	X	I	A	X	X	X	X	I	X	B	B	A	I	I	I	I	I	I	A	A	A	A	X
Caster Oil (Castor Oil)	A	A	I	A	X	A	A	I	I	I	A	A	A	I	A	A	I	X	A	A	A	A	A	A
Caustic Potash	B	B	A	X	A	B	A	A	A	A	A	A	A	I	A	X	X	A	A	A	X	B	B	B
Caustic Soda	B	A	I	X	A	B	A	A	A	B	A	A	A	I	A	X	X	X	A	A	X	B	A	A
Cellosize	X	I	I	I	X	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	X	I	I
Cellosolve	X	A	X	X	X	A	A	I	I	I	A	A	A	I	A	A	X	X	I	A	X	X	A	A
Cellosolve Acetate	X	B	I	X	X	B	B	I	I	I	A	A	A	I	A	I	X	I	I	A	X	X	B	B
Chloracetic Acid	X	X	I	X	B	X	X	I	I	I	A	A	A	X	A	X	X	X	X	A	X	X	X	X
Chlorinated Solvents	X	X	I	A	X	X	X	X	I	I	I	B	A	A	I	B	X	A	I	I	A	A	X	X
Chlorine (Dry) (Gas)											N/R													
Chlorine (Wet)	X	X	I	B	X	X	X	X	B	B	B	X	A	I	X	X	X	I	I	A	B	X	X	X
Chloroacetone	X	X	X	X	X	X	I	X	I	I	A	A	A	I	A	X	X	I	I	A	X	X	X	X
Chlorobenzene	X	X	X	A	X	X	X	X	X	X	B	A	A	I	A	B	I	I	I	A	A	X	X	X
Chlorobenzol	X	X	I	A	X	X	X	I	I	I	A	A	A	I	A	B	I	I	I	A	A	X	X	X
Chlorobutane	X	I	X	A	X	X	X	X	I	I	X	X	A	I	I	I	I	I	I	A	A	X	I	I
Chloroethylbenzene	X	X	I	A	X	X	X	X	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X	X
Chloroform	X	X	X	B	X	X	X	X	X	X	B	X	A	A	A	B	I	X	X	A	B	X	X	X
Chloropentane	X	X	X	A	X	X	X	X	I	X	A	A	A	I	A	X	I	I	I	A	A	X	X	X
Chloroophenol	X	X	X	B	X	X	X	X	I	I	A	X	A	I	I	I	I	I	I	A	B	X	X	X
Chloropropanone	X	X	X	X	X	X	I	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	X	X
Chlorosulfonic Acid	X	X	X	X	X	X	X	B	I	X	X	X	A	X	B	X	X	X	X	A	X	X	X	X
Chlorothene	X	X	I	A	X	X	X	X	I	X	X	A	A	I	A	I	I	I	I	A	A	X	X	X
Chlorotoluene	X	X	X	A	X	X	X	X	X	X	X	X	A	I	A	I	I	I	I	A	A	X	X	X
Chlorpyrifos	I	X	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	X	X
Chromic Acid 25%	X	X	I	I	X	B	X	I	I	I	B	X	A	I	B	X	X	X	X	A	I	X	X	X
Coal Oil	A	X	X	A	X	X	X	I	I	I	A	A	A	I	A	X	A	I	I	A	A	A	X	X
Coal Tar	X	X	X	A	X	X	X	I	I	I	A	A	A	I	A	I	I	I	I	A	A	X	X	X
Coal Tar Naptha	X	X	X	A	X	X	X	I	I	I	A	A	A	I	A	A	I	I	I	A	A	X	X	X
Copper Chloride	A	A	A	A	X	A	A	A	A	B	A	A	A	X	X	X	X	A	A	A	A	A	A	A
Copper Hydrate	B	I	I	X	X	B	A	A	I	I	A	A	A	I	I	I	I	I	I	A	X	B	I	I
Copper Hydroxide	B	I	I	X	X	B	A	A	I	I	A	A	A	I	I	I	I	I	I	A	X	B	I	I
Copper Nitrate	A	A	A	A	X	A	A	A	A	I	A	A	A	A	A	X	X	X	A	A	A	A	A	A
Copper Nitrite	A	A	A	A	X	A	A	A	A	I	A	A	A	A	I	I	I	I	I	A	A	A	A	A
Copper Sulfate	A	A	A	A	X	A	A	A	A	I	A	A	A	A	A	X	X	A	A	A	A	A	A	A
Copper Sulfide	A	A	A	A	X	A	A	A	B	I	A	A	A	I	I	I	I	I	I	A	A	A	A	A
Creosols	X	X	I	A	X	X	A	I	I	I	A	A	A	I	A	I	X	I	I	A	A	X	X	X
Creosote	B	X	I	A	X	X	X	X	X	X	A	A	A	A	A	I	I	I	X	A	A	B	X	X
Cresylic Acid	X	X	X	I	X	X	A	I	I	I	A	A	A	A	A	B	X	X	I	A	I	X	X	X
Crotonaldehyde	X	I	X	X	X	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	I
Crude Oil	A	X	X	A	X	X	X	A	B	X	A	A	A	I	A	A	I	I	I	A	A	A	X	X
Cumene	X	X	X	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X	X
Cupric Carbonate	A	A	B	A	X	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	A	A	A	A
Cupric Chloride	A	A	B	A	X	A	A	A	A	I	A	A	A	I	B	X	I	I	I	A	A	A	A	A
Cupric Nitrate	A	A	B	A	X	A	A	A	A	I	A	A	A	I	B	I	I	I	I	A	A	A	A	A





## CHEMICAL RESISTANCE GUIDE @ 70°F/20°C

**RATING DEFINITIONS**

**X=DO NOT USE**

**A=CONTINUOUS SERVICE**

**B=INTERMITTENT USE**

**I=INSUFFICIENT DATA**

### CHEMICAL RESISTANCE GUIDE

	HOSE MATERIAL												COUPLING MATERIAL					GASKET MATERIAL					
	NITRILE	EPDM	SBR	VITON	NATURAL	HYPALON	BUTYL	PVC	TPU	TPR	UHMWPE	XLPE	TEFLON	304SS	316SS	ALUMINUM	BRASS	NYLON	POLYPROPYLENE	TEFLON	VITON	BUNA	EPDM
Cupric Sulphate	A	A	A	A	X	A	A	A	A	I	A	A	A	I	I	I	I	I	I	A	A	A	A
Cyclohexane	B	X	X	A	X	X	X	X	X	X	A	A	A	A	A	B	X	I	X	A	A	B	X
Cyclohexanol	B	X	X	B	X	X	X	X	X	X	A	A	A	I	A	X	X	I	I	A	B	B	X
Cyclohexanone	X	X	X	X	X	X	X	X	X	X	A	A	A	I	A	I	I	I	I	A	X	X	X
Cyclopentane	B	X	X	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	B	X
Cyclopentane, methyl	B	X	I	A	X	X	X	A	I	I	A	A	A	I	I	I	I	I	I	A	A	B	X
Cyclopentanol	B	X	I	B	X	X	X	A	I	I	A	A	A	I	I	I	I	I	I	A	B	B	X
Cyclopentanone	X	X	I	X	X	X	X	A	I	I	A	A	A	I	I	I	I	I	I	A	X	X	X
D.D.T. in Kerosene	A	X	I	A	X	X	X	X	X	X	A	A	A	I	I	I	A	I	I	A	A	A	X
D.M.P.	X	X	I	X	X	X	X	I	I	I	X	X	A	I	A	I	I	I	I	A	X	X	X
Decalin®	X	X	I	A	X	X	X	I	I	I	X	A	A	I	I	I	I	I	I	A	A	X	X
Decanol	A	A	I	B	X	A	A	B	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Decyl Alcohol	A	A	I	B	X	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Decyl Aldehyde	X	I	I	X	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Decyl Butyl Phthalate	X	I	I	X	X	X	A	X	X	X	A	A	A	I	I	I	I	I	I	A	X	X	I
Denatured Alcohol	A	A	I	B	A	A	A	A	I	I	A	A	A	I	A	B	A	I	I	A	B	A	A
Diacetone Alcohol	X	X	X	X	B	B	A	A	B	B	A	A	A	A	A	I	I	A	X	A	X	X	X
Diamyl Phenol	X	X	I	A	X	X	X	X	X	X	A	A	A	I	I	I	I	I	I	A	A	X	X
Diamylamine	B	I	B	I	B	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I
Diamylene	X	X	I	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X
Diethyl Ether	X	X	X	I	X	X	B	I	I	I	A	A	A	I	A	A	X	I	I	A	I	X	X
Dibromobenzene	X	X	X	A	X	X	X	X	I	I	B	A	A	I	I	I	I	I	I	A	A	X	X
Dibutyl Amine	B	X	I	X	B	X	X	X	I	I	A	A	A	I	I	I	I	I	I	A	X	B	X
Dibutyl Ether	X	X	I	X	X	B	X	I	I	I	A	A	A	I	A	A	X	I	I	A	X	X	X
Dibutyl Phthalate	X	A	I	X	X	X	A	X	X	X	A	A	A	I	A	A	I	I	I	A	X	X	A
Dibutyl Sebacate	X	X	X	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	X
Dicalcium Phosphate	A	A	A	A	A	A	A	A	B	I	A	A	A	I	I	I	I	I	I	A	A	A	A
Dicamba	I	A	I	I	I	I	I	I	I	I	A	A	A	I	I	I	I	I	I	A	I	I	A
Dichloroacetic Acid	X	I	X	X	B	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Dichlorobenzene	X	X	I	A	X	X	X	X	X	X	A	A	A	I	A	B	I	I	I	A	A	X	X
Dichlorobutane	X	X	X	A	X	X	X	X	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X
Dichlorodifluoromethane	B	X	X	B	X	X	X	I	I	I	I	A	A	I	I	I	I	I	I	A	B	B	X
Dichloroethane	X	X	X	A	X	X	X	X	I	I	A	A	A	I	I	A	I	I	I	A	A	X	X
Dichloroethyl Ether	X	X	X	I	X	X	X	X	I	X	A	A	A	I	I	I	I	I	I	A	I	X	X
Dichloroethylene	X	I	X	A	X	X	X	X	I	X	X	X	A	I	I	A	X	I	I	A	A	X	I
Dichlorohexane	X	X	X	A	X	X	X	X	I	X	A	A	A	I	I	I	I	I	I	A	A	X	X
Dichloromethane	X	X	X	A	X	X	X	X	I	X	A	A	A	I	A	B	I	I	I	A	A	X	X
Dichloropentane	X	X	X	A	X	X	X	X	I	X	A	A	A	I	I	I	I	I	I	A	A	X	X
Dichloropropane	X	X	I	A	X	X	X	X	I	X	A	B	A	I	A	X	I	I	I	A	A	X	X
Diesel Oil	A	X	X	A	X	X	X	B	I	X	A	A	A	I	A	A	I	I	I	A	A	A	X
Diethanol Amine	B	I	I	I	B	X	A	I	I	I	A	A	A	I	A	I	I	I	I	A	I	B	I
Diethyl Benzene	X	X	X	A	X	X	X	X	I	X	A	A	A	I	I	I	I	I	I	A	A	X	X
Diethyl Carbinol	A	I	I	B	A	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	B	A	I
Diethyl Ketone	X	X	I	X	X	X	B	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	X
Diethyl Oxalate	X	X	I	I	B	X	B	X	I	I	A	A	A	I	I	I	I	I	I	A	I	X	X
Diethyl Phthalate	X	X	X	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	X
Diethyl Sebacate	X	X	X	X	X	X	A	X	I	I	A	A	A	I	A	A	I	I	I	A	X	X	X
Diethyl Sulfate	X	I	X	X	X	X	B	I	I	I	A	A	A	I	X	I	I	I	I	A	X	X	I
Diethyl Triamine	B	I	B	I	B	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I
Diethylamine	B	B	B	I	B	X	A	I	I	I	A	A	A	A	A	I	X	X	A	A	I	B	B
Diethylene Dioxide	X	A	X	X	X	X	B	I	I	I	A	A	A	I	X	X	X	I	A	X	X	A	A
Diethylene Glycol	A	A	A	A	A	A	A	B	I	I	A	A	A	I	A	B	A	I	I	A	A	A	A
Diethylene Triamine	B	I	I	I	B	X	A	I	I	I	A	A	A	I	I	I	X	I	I	A	I	B	I
Dihydroxydiethyl Ether	A	A	I	A	A	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	A	A	A
Dihydroxyethyl Amine	B	I	B	I	B	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I
Diisobutyl Ketone	X	B	X	X	X	X	B	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	B
Diisobutylene	A	X	X	A	X	X	X	I	I	I	A	A	A	I	A	I	I	I	I	A	A	A	X
Diisooctyl Adipate	X	I	I	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Diisooctyl Phthalate	X	I	I	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Diisocyanate	X	X	I	X	X	X	X	I	I	I	X	X	A	I	I	I	I	I	I	A	X	X	X
Diisodecyl Adipate	X	I	X	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Diisodecyl Phthalate	X	I	X	X	X	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I





# CHEMICAL RESISTANCE GUIDE

## CHEMICAL RESISTANCE GUIDE @ 70°F/20°C

CHEMICAL RESISTANCE GUIDE	RATING DEFINITIONS																						
	X=DO NOT USE					A=CONTINUOUS SERVICE					B=INTERMITTENT USE					I=INSUFFICIENT DATA							
	HOSE MATERIAL										COUPLING MATERIAL					GASKET MATERIAL							
	NITRILE	EPDM	SBR	VITON	NATURAL	HYPALON	BUTYL	PVC	TPU	TPR	UHMWPE	XLPE	TEFLON	304SS	316SS	ALUMINUM	BRASS	NYLON	POLYPROPYLENE	TEFLON	VITON	BUNA	EPDM
Diisopropanol Amine	B	I	B	I	B	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I
Diisopropyl Amine	B	I	I	I	B	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I
Diisopropyl Ether	B	X	X	I	X	B	X	I	I	I	A	A	A	I	A	I	I	I	I	A	I	B	X
Diisopropyl Ketone	X	B	X	X	X	X	B	X	I	I	A	A	A	I	A	A	I	I	I	A	X	X	B
Dilauryl Ether	B	I	X	I	X	B	I	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I
Dimethyl Amine											N/R												
Dimethyl Benzene	X	X	X	A	X	X	X	X	I	I	A	A	A	I	A	I	I	I	I	A	A	X	X
Dimethyl Carbinol	A	A	I	B	A	A	A	I	I	I	A	A	A	I	A	I	I	I	I	A	B	A	A
Dimethyl Ether	B	X	I	I	X	B	X	I	I	I	A	B	A	I	I	I	I	I	I	A	I	B	X
Dimethyl Ketone	X	A	I	X	B	X	A	X	I	I	A	B	A	I	A	A	I	I	I	A	X	X	A
Dimethyl Phenol	X	X	I	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X
Dimethyl Phthalate	X	B	X	X	X	X	A	X	I	I	A	A	A	I	A	I	I	I	I	A	X	X	B
Dimethyl Sulfate	X	I	X	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Dimethyl Sulfide											N/R												
Dinitrobenzene	X	I	X	A	X	X	X	X	I	I	A	A	A	I	I	I	I	I	I	A	A	X	I
Diocetyl Adipate	X	B	I	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	B
Diocetyl Amine	B	I	I	I	B	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I
Diocetyl Phthalate	X	X	I	A	X	X	B	X	X	X	A	A	A	I	A	I	I	I	I	A	A	X	X
Diocetyl Sebacate	X	B	I	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	B
Dioxane	X	X	X	X	X	X	B	I	I	I	A	A	A	I	A	I	I	I	I	A	X	X	X
Dioxolane	X	X	X	I	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	I	X	X
Diphenyl Phthalate	X	I	I	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Dipropyl Ketone	X	I	X	X	X	X	B	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Dipropylamine	B	I	A	I	B	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I
Dipropylene Glycol	A	I	A	A	A	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	A	A	I
Disodium Phosphate	A	I	I	I	A	A	A	A	A	B	A	A	A	I	A	I	B	A	A	A	I	A	I
Divinyl Benzene	X	X	X	A	X	X	X	X	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X
Dodecyl Benzene	X	X	X	A	X	X	X	X	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X
Dodecyl Toluene	X	X	X	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X
Dow-Per	X	X	X	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X
Dowtherm® A	X	X	I	A	X	X	I	I	I	I	A	A	A	I	I	I	A	I	I	A	A	X	X
Dowtherm® E	X	X	I	A	X	X	X	I	I	I	A	A	A	I	I	X	I	I	I	A	A	X	X
Dowtherm® SR-1	A	I	I	A	A	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	A	A	I
Endolene	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I
Epichlorohydrin											N/R												
Ethanol	A	A	I	B	A	A	A	A	A	A	A	A	A	A	A	B	A	A	A	A	B	A	A
Ethanol Amine	B	B	I	I	B	B	A	A	B	I	A	A	A	I	A	B	I	I	I	A	I	B	B
Ethyl Acetate	X	A	X	X	X	X	B	X	X	B	A	A	A	A	A	A	A	A	X	A	X	X	A
Ethyl Acetoacetate	X	B	X	X	X	X	B	X	I	I	A	A	A	I	B	I	I	I	I	A	X	X	B
Ethyl Acrylate	X	X	X	X	X	X	X	X	X	I	A	B	A	I	A	A	A	I	I	A	X	X	X
Ethyl Alcohol	A	A	I	A	A	A	A	A	A	A	A	A	A	I	A	B	A	I	I	A	A	A	A
Ethyl Aldehyde											N/R												
Ethyl Aluminum Dichloride	X	X	I	B	X	X	X	I	I	I	X	B	A	I	I	I	I	I	I	A	B	X	X
Ethyl Benzene	X	X	X	A	X	X	X	X	I	X	A	A	A	I	A	A	X	I	I	A	A	X	X
Ethyl Butanol	A	A	I	B	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Ethyl Butyl Acetate	X	I	I	X	B	A	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Ethyl Butyl Alcohol	A	A	A	B	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Ethyl Butyl Amine	B	I	B	I	B	X	A	I	I	I	A	I	A	I	I	I	I	I	I	A	I	B	I
Ethyl Butyl Ketone	X	I	X	X	X	X	B	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Ethyl Butylaldehyde	X	I	I	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Ethyl Chloride											N/R			I	A	I	I	A	X				
Ethyl Dichloride	X	X	X	B	X	X	X	X	X	X	B	B	A	I	I	I	I	I	I	A	B	X	X
Ethyl Ether											N/R												
Ethyl Formate	X	B	X	X	X	X	B	X	I	I	A	A	A	I	A	I	I	I	I	A	X	X	B
Ethyl Hexanol	A	A	A	B	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Ethyl Hexoic Acid	X	I	I	I	X	B	X	I	I	I	A	A	A	I	I	I	I	I	I	A	I	X	I
Ethyl Hexyl Acetate	X	I	I	X	X	B	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Ethyl Hexyl Alcohol	A	A	I	B	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Ethyl Iodide	X	X	I	B	X	X	X	X	X	X	X	B	A	I	I	I	I	I	I	A	B	X	X
Ethyl Isobutyl Ether	B	X	I	I	X	B	X	X	I	I	A	A	A	I	I	I	I	I	I	A	I	B	X
Ethyl Methyl Ketone	X	I	X	X	X	X	B	X	X	X	A	A	A	I	A	A	A	I	I	A	X	X	I





## CHEMICAL RESISTANCE GUIDE @ 70°F/20°C

**RATING DEFINITIONS**

**X=DO NOT USE**

**A=CONTINUOUS SERVICE**

**B=INTERMITTENT USE**

**I=INSUFFICIENT DATA**

### CHEMICAL RESISTANCE GUIDE

#### HOSE MATERIAL

#### COUPLING MATERIAL

#### GASKET MATERIAL

CHEMICAL RESISTANCE GUIDE	HOSE MATERIAL												COUPLING MATERIAL					GASKET MATERIAL				
	NITRILE	EPDM	SBR	VITON	NATURAL	HYPALON	BUTYL	PVC	TPU	TPR	UHMWPE	XLPE	TEFLON	304SS	316SS	ALUMINUM	BRASS	NYLON	POLYPROPYLENE	TEFLON	VITON	BUNA

Ethyl Oxalate	X	X	A	I	A	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	I	X	X	
Ethyl Phthalate	X	I	X	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Ethyl Propyl Ether	B	X	X	I	X	B	X	X	I	I	A	A	A	I	I	I	I	I	I	A	I	B	X	
Ethyl Propyl Ketone	X	I	X	X	X	X	B	X	X	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Ethyl Silicate	A	I	B	I	X	I	A	I	I	I	A	A	A	I	A	I	I	I	I	A	I	A	I	
Ethyl Sulfate	X	I	X	X	X	X	B	I	I	I	A	A	A	X	X	I	I	I	I	A	X	X	I	
Ethylamine											N/R													
Ethylene Bromide	X	X	X	B	X	X	X	X	X	X	X	B	A	I	A	X	I	I	I	A	B	X	X	
Ethylene Chloride	X	X	X	B	X	X	X	X	X	X	B	B	A	A	A	B	I	A	X	A	B	X	X	
Ethylene Diamine	B	B	B	I	B	X	A	I	I	I	A	A	A	I	A	I	I	I	I	A	I	B	B	
Ethylene Dibromide	X	X	X	B	X	X	X	X	X	X	X	B	A	I	A	X	I	I	I	A	B	X	X	
Ethylene Dichloride	X	X	X	B	X	X	X	X	X	X	B	B	A	A	A	B	I	A	X	A	B	X	X	
Ethylene Glycol	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	I	A	X	A	A	A	A	
Ethylhexil Phosphordieth	A	X	I	I	I	X	X	I	I	I	I	X		I	I	I	I	I	I		I	A	X	
Ex-Tri	X	I	I	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	I	
Ferric Bromide	A	A	A	A	A	A	A	A	A	B	A	A	A	I	I	I	I	I	I	A	A	A	A	
Ferric Chloride	A	A	A	A	A	A	A	A	A	A	A	A	A	I	X	X	X	X	A	A	A	A	A	
Ferric Sulfate	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	X	X	X	A	A	A	A	A	
Ferrous Acetate	X	I	X	X	X	A	A	A	A	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Ferrous Chloride	A	A	A	B	A	A	A	A	A	B	A	A	A	X	I	X	X	X	A	A	B	A	A	
Ferrous Hydroxide	B	I	B	X	A	B	A	A	I	I	A	A	A	I	B	I	I	I	I	A	X	B	I	
Ferrous Sulfate	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	X	X	X	A	A	A	A	
Fluoboric Acid 65%	I	I	I	I	A	A	A	I	I	I	B	I	A	I	I	I	X	X	A	A	I	I	I	
Fluorine (wet)	X	X	I	X	X	X	X	I	I	I	X	X	B	I	X	X	X	I	I	B	X	X	X	
Fluosilicic Acid 50%	I	I	I	I	A	A	A	I	I	I	B	I	A	I	A	X	X	I	I	A	I	I	I	
Formaldehyde 40%	A	A	I	B	B	A	A	I	I	I	A	A	A	I	A	B	I	X	A	A	B	A	A	
Formalin	A	A	I	A	EI	A	A	I	I	I	A	A	A	I	A	B	I	I	I	A	A	A	A	
Formic Acid	X	A	A	X	B	X	A	I	I	I	A	B	A	A	B	I	X	X	A	A	X	X	A	
Freon® 12	B	X	I	B	X	X	X	B	B	X	A	B	A	I	A	I	I	I	I	A	B	B	X	
Freon® 22	X	I	I	X	X	X	X	X	X	X	A	B	A	I	A	I	I	I	I	A	X	X	I	
Fuel A (ASTM)	A	X	I	A	X	X	X	B	A	I	B	B	A	I	A	A	I	I	I	A	A	A	X	
Fuel B (ASTM)	A	X	I	A	X	X	X	B	A	X	B	B	A	I	I	I	I	I	I	A	A	A	X	
Fuel Oil	A	X	X	A	X	X	X	B	A	X	A	B	A	I	A	A	I	A	X	A	A	A	X	
Furfural	X	B	X	X	I	I	A	X	X	X	A	A	A	A	A	A	X	A	X	A	X	X	B	
Furfuryl Alcohol	I	I	X	X	I	I	X	I	I	I	A	A	A	I	A	A	I	I	I	A	X	I	I	
Gallic Acid	I	B	A	I	A	I	B	I	I	I	A	I	A	A	B	I	I	A	I	A	I	I	B	
Gasoline	A	X	I	A	X	X	X	X	X	X	B	B	A	A	A	I	I	A	X	A	A	A	X	
Glacial Acetic Acid	X	A	I	X	X	X	B	B	X	I	A	A	A	I	A	B	X	I	I	A	X	X	A	
Gluconic Acid	X	I	X	I	X	B	X	I	I	I	A	A	A	I	X	X	A	I	I	A	I	X	I	
Glycerin	A	A	I	A	A	A	A	A	B	A	B	A	A	I	A	A	A	A	A	A	A	A	A	
Glyphosate	I	A	I	I	I	I	I	I	I	I	A	I	I	I	I	I	I	I	I	I	I	I	A	
Graffinite	A	X	I	X	X	X	X	I	I	I	I	X	I	I	I	I	I	I	I	I	X	A	X	
Grease	A	X	X	A	X	X	X	A	A	B	A	B	A	A	A	A	A	A	I	A	A	A	X	
Green Sulfate Liquor	A	A	A	I	A	A	A	I	I	I	A	A	A	I	A	X	X	I	I	A	I	A	A	
Heptanal	X	I	I	X	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Heptane	A	X	X	A	X	X	X	A	A	X	A	B	A	I	A	A	I	A	X	A	A	A	X	
Heptane Carboxylic Acid	X	I	X	A	X	B	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	I	
Hexaldehyde	X	X	X	X	X	X	X	I	I	I	A	A	A	I	A	A	I	I	I	A	X	X	X	
Hexane	A	X	X	A	X	X	X	A	A	X	B	B	A	A	A	A	A	A	X	A	A	A	X	
Hexanol	A	A	I	B	A	A	A	A	B	B	B	A	A	I	A	I	I	I	I	A	B	A	A	
Hexyl Methyl Ketone	X	I	X	X	X	X	B	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Hexyl-Alcohol	A	X	I	B	A	A	A	I	I	I	A	A	A	I	A	I	I	I	I	A	B	A	X	
Hexylamine	X	I	B	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Hexylene	A	X	X	A	X	X	X	I	I	I	X	X	A	I	I	I	I	I	I	A	A	A	X	
Hexylene Glycol	A	I	A	A	A	A	A	B	I	I	A	A	A	I	A	B	A	I	I	A	A	A	I	
Hi-Tri	X	X	I	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X	
Hydrobromic Acid (37%)	X	A	I	I	A	A	A	I	I	I	B	I	A	I	X	X	X	X	A	A	I	X	A	
Hydrochloric Acid (38%)	X	B	I	X	B	X	A	I	I	I	A	A		I	X	X	X	I			X	X	B	
Hydrochloric Acid 38% Fuming	X	B	I	I	B	X	A	I	I	I	I	A		I	X	X	X	I			I	X	B	
Hydrofluoric Acid (10%)	X	I	I	I	X	A	A	I	I	I	A	A	A	I	A	X	X	I			A	I	X	I
Hydrofluosilicic Acid	I	A	I	I	A	A	B	B	B	I	B	I	A	X	A	X	X	I			A	I	A	
Hydrogen Dioxide 10%	X	I	I	A	X	X	X	A	I	I	B	I	A	I	A	B	X	I			A	A	X	I





# CHEMICAL RESISTANCE GUIDE

## CHEMICAL RESISTANCE GUIDE @ 70°F/20°C

RATING DEFINITIONS		X=DO NOT USE		A=CONTINUOUS SERVICE		B=INTERMITTENT USE		I=INSUFFICIENT DATA																
CHEMICAL RESISTANCE GUIDE	HOSE MATERIAL														COUPLING MATERIAL				GASKET MATERIAL					
	NITRILE	EPDM	SBR	VITON	NATURAL	HYPALON	BUTYL	PVC	TPU	TPR	UHMWPE	XLPE	TEFLON	304SS	316SS	ALUMINUM	BRASS	NYLON	POLYPROPYLENE	TEFLON	VITON	BUNA	EPDM	
Hydrogen Dioxide over 10%	X	X	I	I	X	X	X	A	I	I	I	EI	I	I	I	I	X	I	I	I	I	X	X	
Hydrogen Gas	No Hose is Recommended For This Application																							
Hydrogen Peroxide 10% to 50%	X	I	I	A	X	X	X	I	I	I	I	B	I	A	I	I	B	I	X	A	A	A	X	I
Hydrogen Peroxide over 50%	X	X	I	X	X	X	X	I	I	I	X	X	A	I	A	I	X	I	I	A	X	X	X	
Iodine	I	I	X	I	I	A	I	X	X	X	A	B	A	X	I	I	X	X	A	A	I	I	I	
Iron Acetate	X	I	X	X	X	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Iron Hydroxide	B	I	B	X	X	B	A	A	I	I	A	A	A	I	I	I	I	I	I	A	X	B	I	
Iron Salts	A	A	A	A	A	A	A	A	I	B	A	A	A	I	I	I	I	I	I	A	A	A	A	
Iron Sulfate	A	A	A	A	A	A	A	A	I	A	A	A	A	I	I	I	I	I	I	A	A	A	A	
Iron Sulfide	A	A	A	A	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	A	A	A	
Isoamyl Acetate	X	X	X	X	X	B	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	X	
Isoamyl Alcohol	A	A	A	B	A	A	A	A	I	I	A	A	A	I	A	I	A	I	I	A	B	A	A	
Isoamyl Bromide	X	X	X	B	X	X	X	X	X	I	B	B	A	I	I	I	I	I	I	A	B	X	X	
Isoamyl Butyrate	X	I	X	X	X	X	X	X	I	I	B	B	A	I	I	I	I	I	I	A	X	X	I	
Isoamyl Chloride	X	I	X	B	X	X	X	X	I	I	X	X	A	I	I	I	I	I	I	A	B	X	I	
Isoamyl Ether	B	X	X	I	X	B	X	X	I	I	A	A	A	I	I	I	I	I	I	A	I	B	X	
Isoamyl Phthalate	X	I	X	X	X	X	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Isobutane	No Hose is Recommended For This Application																							
Isobutanol	A	A	I	B	A	A	A	A	I	A	A	A	A	I	A	I	I	I	I	A	B	A	A	
Isobutyl Acetate	X	X	X	X	X	B	A	X	I	I	A	A	A	I	A	B	I	I	I	A	X	X	X	
Isobutyl Alcohol	X	A	I	B	A	A	A	A	I	A	A	A	A	A	A	I	I	A	A	A	B	X	A	
Isobutyl Aldehyde	X	I	X	X	X	B	I	I	I	A	A	A	A	I	I	I	I	I	I	A	X	X	I	
Isobutyl Amine	X	I	B	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Isobutyl Bromide	X	X	X	B	X	X	X	I	I	I	B	X	A	I	I	I	I	I	I	A	B	X	X	
Isobutyl Carbinol	A	A	A	B	A	A	A	I	I	I	A	A	A	I	A	I	A	I	I	A	B	A	A	
Isobutyl Chloride	X	X	X	B	X	X	X	I	I	I	B	X	A	I	I	I	I	I	I	A	B	X	X	
Isobutyl Ether	X	X	X	I	X	B	X	I	I	I	A	A	A	I	I	I	I	I	I	A	I	X	X	
Isobutylene	X	X	X	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X	
Isooctane	A	X	X	A	X	X	X	B	I	I	B	B	A	I	A	A	A	I	I	A	A	A	X	
Isopentane	No Hose is Recommended For This Application																							
Isophorone	X	A	I	I	I	I	A	I	I	I	B	B	A	I	B	A	I	I	I	A	I	X	A	
Isopropanol	A	A	I	B	A	A	A	A	I	A	A	A	A	I	A	I	I	I	I	A	B	A	A	
Isopropanol Amine	B	I	I	X	B	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	X	B	I	
Isopropyl Acetate	X	X	X	X	X	X	A	X	X	I	A	A	A	I	A	I	I	I	I	A	X	X	X	
Isopropyl Alcohol	A	A	A	B	A	A	A	A	A	B	A	A	A	A	A	I	I	A	A	A	B	A	A	
Isopropyl Amine	X	I	X	X	X	B	I	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Isopropyl Benzene	X	X	X	A	X	X	X	X	I	X	A	A	A	I	I	I	I	I	I	A	A	X	X	
Isopropyl Chloride	No Hose is Recommended For This Application																							
Isopropyl Ether	X	X	X	I	X	B	X	I	I	I	A	A	A	I	A	I	I	A	X	A	I	X	X	
Isopropyl Toluene	X	X	X	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X	
Jet Fuels	Special Hose Required																							
Kerosene	B	X	X	A	X	X	X	B	X	X	A	A	T	A	A	A	I	X	X	T	A	B	X	
Lauryl Alcohol	A	A	A	B	A	A	A	I	I	I	A	A	T	I	I	I	I	I	I	T	B	A	A	
Lead Acetate	X	B	X	X	X	X	A	A	A	B	A	A	T	A	A	X	X	X	A	T	X	X	B	
Lead Sulfate	A	A	A	A	A	A	A	X	I	I	A	A	T	I	A	X	X	I	I	T	A	A	A	
Ligroin	A	X	X	A	X	X	X	I	I	I	A	A	T	I	A	A	I	I	I	T	A	A	X	
Linseed Oil	A	B	X	A	X	B	A	A	A	X	A	I	T	A	A	I	A	A	A	T	A	A	B	
Liquefied Natural Gas (LNG)	Special Hose Required																							
Liquefied Petroleum Gas (LPG)	Special Hose Required																							
Lubricating Oils	A	X	X	A	X	X	X	B	A	I	A	A	T	I	A	A	A	I	I	T	A	A	X	
M.E.K.	X	X	I	X	X	X	X	X	X	X	A	A	T	I	X	X	X	A	X	T	X	X	X	
Magnesium Acetate	X	I	X	X	X	A	A	A	I	I	A	A	T	I	I	I	I	I	I	T	X	X	I	
Magnesium Chloride	A	A	A	A	A	A	A	A	A	A	A	A	T	A	A	X	I	X	A	T	A	A	A	
Magnesium Hydrate	B	I	A	B	A	B	A	A	I	B	A	A	T	I	A	X	I	I	I	T	B	B	I	
Magnesium Hydroxide	B	A	A	B	A	B	A	A	A	A	A	A	T	A	A	X	I	X	A	T	B	B	A	
Magnesium Sulfate	A	B	A	A	A	A	A	A	A	A	A	A	T	A	A	I	I	X	A	T	A	A	B	
Maleic Acid	X	I	X	I	X	X	X	I	I	I	A	B	T	A	A	B	X	X	A	T	I	X	I	
Malic Acid	I	I	A	I	A	A	I	A	B	B	B	I	T	A	A	B	X	A	I	T	I	I	I	
Manganese Sulfate	A	A	A	A	X	A	A	A	I	I	A	A	T	I	A	I	I	I	I	T	A	A	A	
Manganese Sulfide	A	A	A	A	X	A	A	A	I	I	A	A	T	I	I	I	I	I	I	T	A	A	A	
Manganese Sulfite	A	A	A	A	X	A	A	A	I	I	A	A	T	I	I	I	I	I	I	T	A	A	A	
Mesityl Oxide	X	X	I	X	X	X	B	I	I	I	A	A	T	I	A	I	I	I	I	T	X	X	X	



# CHEMICAL RESISTANCE GUIDE



## CHEMICAL RESISTANCE GUIDE @ 70°F/20°C

**RATING DEFINITIONS**

**X=DO NOT USE**

**A=CONTINUOUS SERVICE**

**B=INTERMITTENT USE**

**I=INSUFFICIENT DATA**

### CHEMICAL RESISTANCE GUIDE

#### HOSE MATERIAL

#### COUPLING MATERIAL

#### GASKET MATERIAL

	NITRILE	EPDM	SBR	VITON	NATURAL	HYPALON	BUTYL	PVC	TPU	TPR	UHMWPE	XLPE	TEFLON	304SS	316SS	ALUMINIUM	BRASS	NYLON	POLYPROPYLENE	TEFLON	VITON	BUNA	EPDM
--	---------	------	-----	-------	---------	---------	-------	-----	-----	-----	--------	------	--------	-------	-------	-----------	-------	-------	---------------	--------	-------	------	------

Methyl Alcohol	A	A	I	B	A	A	A	A	I	I	A	A	T	I	I	I	I	I	I	T	B	A	A
Methanol	A	A	I	X	A	A	A	A	A	A	A	A	T	A	A	I	I	A	A	T	X	A	A
Methyl (Wood) Alcohol	A	A	I	X	A	A	A	B	B	A	A	A	T	I	A	I	I	I	I	T	X	A	A
Methyl Acetate	X	A	X	X	X	B	A	X	X	X	A	A	T	I	A	I	I	I	I	T	X	X	A
Methyl Acetoacetate	X	I	I	X	X	X	B	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Methyl Acetone	No Hose is Recommended For This Application																						
Methyl Amyl Acetate	X	X	I	X	X	B	A	X	X	X	B	A	A	I	I	I	I	I	I	A	X	X	X
Methyl Amyl Alcohol	A	A	I	B	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Methyl Amyl Carbinol	A	A	I	B	A	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Methyl Amyl Ketone	X	I	I	X	X	X	B	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Methyl Benzene	X	X	I	A	X	X	X	X	I	X	A	A	A	I	A	A	A	I	I	A	X	X	X
Methyl Butanol	A	I	I	B	A	A	A	B	I	X	A	A	A	I	A	I	A	I	I	A	B	A	I
Methyl Butanone	X	8	I	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	B
Methyl Butyl Ketone	X	I	X	X	X	X	B	X	I	I	A	A	A	I	A	B	I	I	I	A	X	X	I
Methyl Carbitol	X	I	I	I	X	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	X	I
Methyl Cellosolve	X	A	X	I	X	A	A	B	I	I	A	A	A	I	A	B	A	I	A	A	I	X	A
Methyl Chloride	No Hose is Recommended For This Application																						
Methyl Cyclohexane	X	X	X	B	X	X	X	I	I	I	A	B	A	I	I	I	I	I	I	A	B	X	X
Methyl Ethyl Ketone (M.E.K.)	X	X	I	X	X	X	X	I	I	I	A	A	A	I	X	X	X	A	X	A	X	X	X
Methyl Hexanol	A	A	A	A	B	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	A	A	A
Methyl Hexanone	X	I	I	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Methyl Hexyl Ketone	X	I	X	X	X	B	X	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Methyl Isobutyl Carbinol	A	A	B	B	A	A	A	I	I	I	A	A	A	I	B	I	I	I	I	A	B	A	A
Methyl Isobutyl Ketone (MIBK)	X	X	X	X	X	X	X	I	I	I	A	A	A	I	X	X	X	A	X	A	X	X	X
Methyl Isopropyl Ketone	X	B	X	X	X	X	B	X	I	I	A	A	A	I	A	I	I	A	I	A	X	X	B
Methyl Normal Amyl Ketone	X	I	I	X	X	X	B	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Methyl Propyl Carbinol	A	A	I	B	A	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Methyl Propyl Ether	X	X	X	I	X	B	X	I	I	I	A	A	A	I	I	I	I	I	I	A	I	X	X
Methyl Propyl Ketone	X	I	X	X	X	X	B	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
MTBE 100% Concentrate	X	X	I	X	X	X	X	I	I	I	X	A	I	I	I	I	I	I	I	I	X	X	X
Methylallyl Acetate	X	A	I	X	X	B	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	A
Methylallyl Chloride	X	I	I	X	X	X	X	X	X	X	A	B	A	I	I	I	I	I	I	A	X	X	I
Methyldiethanolamine	A	X	I	X	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	X	A	X
Methylene Bromide	X	X	X	B	X	X	X	X	X	I	B	B	A	I	I	I	I	I	I	A	B	X	X
Methylene Chloride	No Hose is Recommended For This Application																						
Metribuzin	I	A	I	I	I	I	I	I	I	I	A	I	A	I	I	I	I	I	I	A	I	I	A
MIBK	X	X	I	X	X	X	X	X	I	X	A	A	A	I	X	X	X	I	I	A	X	X	X
Mineral Spirits	A	X	X	B	X	X	X	B	I	I	A	A	A	I	A	A	I	I	I	A	B	A	X
Monochloroacetic Acid	X	X	I	I	B	X	X	I	I	I	A	A	A	I	A	X	X	I	I	A	I	X	X
Monochlorobenzene	X	X	X	A	X	X	X	X	X	X	B	B	A	I	A	B	B	I	I	A	X	X	X
Monochlorodifluoromethane	X	I	X	X	X	X	X	I	I	I	I	A	I	A	I	I	I	I	I	A	X	X	I
Monoethanol Amine	B	B	I	I	B	X	A	I	I	I	A	A	A	I	A	B	I	I	I	A	I	B	B
Monoethyl Amine	No Hose is Recommended For This Application																						
Muriatic Acid	X	X	I	I	A	X	X	I	I	I	A	A	A	I	X	X	X	X	A	A	I	X	X
N/Methylpyrrolidone	X	X	I	X	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	X
Naphtha	A	X	X	A	X	X	X	B	B	X	A	A	A	I	A	I	I	I	I	A	A	A	X
Naphthalene	X	X	I	A	X	X	X	X	B	X	A	A	A	I	A	B	I	A	A	A	A	X	X
Natural Gas	No Hose is Recommended For This Application																						
Neohexane	A	X	I	A	X	X	X	I	I	I	A	A	A	I	A	A	I	I	I	A	A	A	X
Neu-Tri	X	X	I	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X
Nickel Chloride	A	A	A	A	A	A	A	A	A	B	A	A	A	A	B	X	X	X	A	A	A	A	A
Nickel Nitrate	A	A	A	A	A	A	A	A	A	B	A	A	A	I	B	X	X	I	I	A	A	A	A
Nickel Sulfate	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	X	X	X	A	A	A	A	A
Nitric Acid 25%	X	X	I	X	X	X	B	I	I	I	B	B	A	I	A	X	X	I	I	A	X	X	X
Nitric Acid 37%	X	X	I	X	X	X	X	I	I	I	X	X	A	I	A	X	X	I	I	A	X	X	X
Nitric Acid 40%-60%	X	X	I	X	X	X	X	I	I	I	X	X	A	I	A	X	X	I	I	A	X	X	X
Nitric Acid 70%	X	X	I	X	X	X	X	I	I	I	X	X	A	I	B	X	X	I	I	A	X	X	X
Nitro Benzene	X	X	I	B	X	X	X	X	X	X	A	A	A	I	A	B	X	A	A	A	B	X	X
Nitrogen Gas	A	A	A	A	A	A	A	A	A	A	A	A	A	I	A	I	I	I	I	A	A	A	A
Nitrous Oxide	A	A	A	A	A	A	A	A	A	B	A	A	A	I	A	I	X	I	I	A	A	A	A
Nonenes	A	X	I	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	A	X
Octadecanoic Acid	A	B	X	I	X	X	B	I	I	I	A	A	A	I	A	B	A	I	I	A	I	A	B





# CHEMICAL RESISTANCE GUIDE

## CHEMICAL RESISTANCE GUIDE @ 70°F/20°C

RATING DEFINITIONS		X=DO NOT USE				A=CONTINUOUS SERVICE						B=INTERMITTENT USE					I=INSUFFICIENT DATA							
CHEMICAL RESISTANCE GUIDE		HOSE MATERIAL											COUPLING MATERIAL					GASKET MATERIAL						
		NITRILE	EPDM	SBR	VITON	NATURAL	HYPALON	BUTYL	PVC	TPU	TPR	UHMWPE	XLPE	TEFLON	304SS	316SS	ALUMINUM	BRASS	NYLON	POLYPROPYLENE	TEFLON	VITON	BUNA	EPDM
Octane	A	X	X	A	X	X	X	I	I	I	B	B	A	I	B	I	B	I	I	A	A	A	X	
Octanol	A	X	I	B	A	A	A	A	I	B	A	A	A	I	A	I	I	I	I	A	B	A	X	
Octyl Acetate	X	I	X	X	X	A	A	X	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Octyl Alcohol	A	X	I	B	A	A	A	I	I	I	A	A	A	A	A	I	I	A	I	A	B	A	X	
Octyl Aldehyde	X	I	I	X	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Octyl Amine	X	I	B	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Octyl CarBinol	A	A	A	B	A	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A	
Octylene Glycol	A	A	A	A	A	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	A	A	A	
Oil Petroleum	A	X	I	A	X	X	X	B	A	I	B	A	A	I	A	A	X	I	I	A	A	A	X	
Oleic Acid	A	X	X	I	X	X	B	B	B	B	A	A	A	A	A	B	X	A	X	A	I	A	X	
Oleum	X	X	I	X	X	X	X	X	X	X	X	X	A	I	I	X	X	X	X	A	X	X	X	
Organic Fatty Acids	A	X	I	X	X	X	X	I	I	I	A	A	A	I	A	I	I	I	I	A	X	A	X	
OrthodichloroBenzene	X	X	X	A	X	X	X	X	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X	
OrthodichloroBenzol	X	X	I	A	X	X	X	X	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X	
Orthoxylene	X	X	I	A	X	X	X	I	I	I	B	A	A	I	I	I	I	I	I	A	A	X	X	
Oxalic Acid	X	B	B	I	X	X	A	A	A	A	I	A	I	A	I	A	B	X	X	A	A	I	X	B
Oxygen	No Hose is Recommended For This Application																							
Ozone	X	A	B	I	X	B	B	B	B	B	A	I	A	I	I	I	I	I	I	A	I	X	A	
Palmitic Acid	A	B	X	I	X	B	A	B	B	B	A	B	A	I	A	I	X	X	A	A	I	A	B	
Papermakers Alum	A	A	I	A	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	A	A	A	
Paradichlorobenzol	X	X	I	A	X	X	X	X	I	I	B	A	A	I	I	I	I	I	I	A	A	X	X	
Paraffin	A	X	X	A	X	X	B	A	B	I	A	X	A	A	A	A	A	A	A	A	A	A	X	
Paraldehyde	X	B	I	X	X	X	B	I	I	I	A	A	A	I	A	A	I	I	I	A	X	X	B	
Paraxylene	X	X	I	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X	
Pelargonic Acid	A	I	I	I	X	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	A	I	
Pentachloroethane	X	X	I	A	X	X	X	I	I	I	A	A	A	I	A	B	X	I	I	A	A	X	X	
Pentane	No Hose is Recommended For This Application																							
Pentanol	A	A	I	B	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A	
Pentanone	X	I	I	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I	
Perchloroethylene	X	X	X	A	X	X	X	X	X	X	B	A	A	A	A	B	X	X	X	A	A	X	X	
Petroleum - Crude	A	X	I	A	X	X	X	B	A	X	A	A	A	I	A	A	X	I	I	A	A	A	X	
Petroleum Ether (Ligroin)	A	X	I	A	X	X	X	B	A	X	A	A	A	I	A	A	I	I	I	A	A	A	X	
Petroleum Oils	A	X	X	A	X	X	X	B	A	X	A	A	A	I	A	A	X	I	I	A	A	A	X	
Phenol	X	X	B	A	X	X	A	X	X	X	A	A	A	I	A	B	B	I	I	A	A	X	X	
Phenolsulfonic Acid	X	I	X	X	X	X	X	X	I	I	X	B	A	I	B	I	I	I	I	A	X	X	I	
Phenyl Chloride	X	X	X	A	X	X	X	I	I	X	A	A	A	I	A	B	I	I	I	A	A	X	X	
Phosphoric Acid 10%	A	A	I	X	A	A	A	A	A	A	A	A	A	I	A	X	X	X	A	A	X	A	A	
Phosphoric Acid 10-85%	X	A	I	X	B	A	A	I	I	I	A	A	A	I	A	X	I	X	A	A	X	X	A	
Pine Oil	X	X	X	A	X	X	X	I	I	I	A	A	A	A	A	I	X	I	I	A	A	X	X	
Pinene	B	X	X	A	X	X	X	I	I	I	A	A	A	I	B	I	I	I	I	A	A	B	X	
Polyethylene Glycol	A	A	A	A	A	A	A	B	B	B	A	A	A	I	I	I	I	I	I	A	A	A	A	
Polypropylene Glycol	A	A	A	A	A	A	A	B	B	B	A	A	A	I	I	I	I	A	A	A	A	A	A	
Potassium Acetate	X	B	X	X	X	B	A	A	I	B	A	A	A	I	A	X	X	A	A	A	X	X	B	
Potassium Bisulfate	A	A	A	A	A	A	A	A	A	B	A	A	A	I	A	I	X	I	I	A	A	A	A	
Potassium Bisulfite	A	A	A	A	A	A	A	A	A	B	A	A	A	I	I	I	I	I	I	A	A	A	A	
Potassium CarBONate	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	X	X	A	A	A	A	A	A	
Potassium Chloride	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	X	X	A	A	A	A	A	A	
Potassium Chromate	I	I	X	I	I	X	A	A	A	B	B	B	B	A	I	B	I	I	X	A	A	I	I	
Potassium Dichromate	I	I	X	I	I	X	A	A	A	B	B	B	B	A	A	B	X	X	A	A	I	I	I	
Potassium Hydrate	B	B	A	X	A	B	A	A	I	B	A	A	A	I	A	X	I	I	I	A	X	B	B	
Potassium Hydroxide	B	B	A	X	A	B	A	A	B	B	B	B	B	A	I	A	X	X	X	A	A	X	B	B
Potassium Nitrate	A	A	A	A	A	A	A	A	A	B	A	A	A	A	A	B	A	X	A	A	A	A	A	
Potassium Permanganate	B	I	X	A	A	A	A	I	I	I	A	A	A	A	A	I	I	X	A	A	A	B	I	
Potassium Silicate	A	A	A	A	A	A	A	A	I	B	A	A	A	I	A	I	I	I	I	A	A	A	A	
Potassium Sulfate	A	A	A	A	A	A	A	A	A	B	A	A	A	A	A	B	A	A	A	A	A	A	A	
Potassium Sulfide	A	A	A	A	A	A	A	A	A	B	A	A	A	A	A	X	X	I	I	A	A	A	A	
Potassium Sulfite	A	A	A	A	A	A	A	A	A	B	A	A	A	I	A	I	X	I	I	A	A	A	A	
Propane Gas											N/R													
Propanediol	A	A	A	A	A	A	A	A	I	B	A	A	A	I	I	I	I	I	I	A	A	A	A	
Propanol	A	A	I	B	A	A	A	A	I	B	A	A	A	I	A	I	I	I	I	A	B	A	A	
Propyl Acetate	X	X	X	X	X	B	A	X	I	I	A	A	A	I	A	I	I	I	I	A	X	X	X	
Propyl Alcohol	A	A	I	B	A	A	A	A	A	B	A	A	A	A	A	I	I	A	A	A	B	A	A	





## CHEMICAL RESISTANCE GUIDE @ 70°F/20°C

**RATING DEFINITIONS**

**X=DO NOT USE**

**A=CONTINUOUS SERVICE**

**B=INTERMITTENT USE**

**I=INSUFFICIENT DATA**

### CHEMICAL RESISTANCE GUIDE

#### HOSE MATERIAL

#### COUPLING MATERIAL

#### GASKET MATERIAL

CHEMICAL RESISTANCE GUIDE	NITRILE	EPDM	SBR	VITON	NATURAL	HYPALON	BUTYL	PVC	TPU	TPR	UHMWPE	XLPE	TEFLON	304SS	316SS	ALUMINIUM	BRASS	NYLON	POLYPROPYLENE	TEFLON	VITON	BUNA	EPDM
---------------------------	---------	------	-----	-------	---------	---------	-------	-----	-----	-----	--------	------	--------	-------	-------	-----------	-------	-------	---------------	--------	-------	------	------

Propyl Aldehyde	X	I	X	X	X	X	B	I	I	I	A	A	A	I	I	I	I	I	I	A	X	X	I
Propyl Chloride	No Hose is Recommended For This Application																						
Propylene Diamine	B	I	A	I	B	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I
Propylene Dichloride	X	X	X	B	X	X	X	X	X	X	B	A	A	I	A	X	I	I	I	A	B	X	X
Propylene Glycol	A	A	A	A	A	A	A	I	A	A	A	A	A	A	A	I	I	A	I	A	A	A	A
Propylene Tetramer	A	X	I	X	X	X	X	I	I	I	A	A	I	I	I	I	I	I	I	I	X	A	X
Sea Water	A	A	I	A	A	A	A	A	A	A	A	A	A	A	A	I	X	A	A	A	A	A	A
Sewage	A	A	B	I	X	A	X	I	I	I	A	A	A	I	A	X	I	I	I	A	I	A	A
Silicate of Soda	A	A	I	A	A	A	A	B	I	A	A	A	A	I	A	X	X	I	I	A	A	A	A
Soap	A	X	I	X	X	X	X	I	I	I	A	X	A	I	A	X	X	A	A	A	X	A	X
Soda Ash	A	A	I	A	A	A	A	A	A	A	A	A	A	I	A	X	I	I	I	A	A	A	A
Soda, Caustic	B	A	A	X	A	B	A	B	A	A	A	A	A	I	A	X	X	I	I	A	X	B	A
Soda, Lime	B	A	A	X	A	B	A	B	I	I	A	A	A	I	I	I	I	I	I	A	X	B	A
Soda, Niter	A	B	I	A	A	A	A	B	I	A	A	A	A	I	A	B	I	I	I	A	A	A	B
Sodium Acetate	X	B	X	X	X	A	A	B	A	B	A	B	A	A	A	I	A	A	A	A	X	X	B
Sodium Aluminate	A	A	A	A	A	A	A	A	I	B	A	A	A	I	A	I	I	A	I	A	A	A	A
Sodium Bisulfate	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	X	X	X	A	A	A	A	A
Sodium Bisulfite	A	A	A	A	A	A	A	A	I	A	A	A	A	I	A	X	X	I	I	A	A	A	A
Sodium Carbonate	A	A	A	A	A	A	A	A	A	A	A	A	A	I	A	X	I	A	A	A	A	A	A
Sodium Chloride (Brine)	A	A	I	A	A	A	A	A	A	A	A	A	A	I	A	X	I	I	I	A	A	A	A
Sodium Chromate	I	I	X	I	I	X	A	A	I	I	X	X	A	A	A	A	A	A	A	A	I	I	I
Sodium Dichromate	I	A	X	I	I	X	A	A	A	B	A	A	A	I	A	I	X	X	A	A	I	I	A
Sodium Hydrate	B	A	I	X	A	B	A	A	I	I	A	A	A	I	B	X	X	I	I	A	X	B	A
Sodium Hydrochlorite (20%)	X	I	I	B	X	X	B	I	I	I	A	B	A	I	I	I	I	I	I	A	B	X	I
Sodium Hydrosulfide	A	X	I	X	X	X	X	I	I	I	A	A	A	I	I	B	I	I	I	A	X	A	X
Sodium Hydroxide (50%)	B	A	I	X	A	B	A	I	I	I	A	A	A	I	A	X	X	X	A	A	X	B	A
Sodium Hypochlorite	X	A	X	B	X	X	B	A	A	A	B	X	A	I	X	X	X	X	A	A	X	X	A
Sodium Nitrate	A	B	A	A	A	A	A	A	A	A	A	A	A	A	A	B	I	A	A	A	A	A	B
Sodium Silicate	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	X	X	A	A	A	A	A	A
Sodium Sulfate	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	X	A	A	A	A	A	A
Sodium Sulfide	A	A	A	A	A	A	A	A	A	A	A	A	A	B	A	X	X	A	A	A	A	A	A
Sodium Sulfite	A	B	A	A	A	A	A	A	A	A	A	A	A	I	A	I	I	I	I	A	A	A	B
Sodium Sulphate	A	X	I	X	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	X	A	X
Sodium Thiosulfate	A	A	A	A	A	A	A	A	A	A	A	A	A	I	A	I	X	A	A	A	A	A	A
Stannic Chloride	A	A	A	I	A	A	A	A	A	B	A	A	A	X	X	X	X	X	A	A	I	A	A
Stannic Sulfide	A	A	A	I	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	I	A	A
Stannous Chloride	A	B	A	I	A	A	A	A	I	I	A	A	A	X	A	X	X	X	A	I	A	B	A
Stannous Sulfide	A	A	A	I	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	I	A	A
Stearic Acid	A	B	X	I	X	X	B	A	A	A	A	A	A	A	A	B	A	A	A	A	I	A	B
Stoddards Solvent	A	X	X	A	X	X	X	I	I	I	A	A	A	I	A	A	I	X	A	A	A	A	X
Styrene	X	X	X	A	X	X	X	I	I	I	B	X	A	A	A	I	I	I	I	A	A	X	X
Sulfamic Acid (>10%)	B	I	I	I	B	B	A	I	I	I	X	I	A	I	I	I	I	I	I	A	I	B	I
Sulfonic Acid	X	I	X	X	X	X	X	B	I	I	B	B	A	I	I	I	I	I	I	A	X	X	I
Sulfur Dioxide (Liquid)	I	I	I	X	I	B	B	X	X	X	B	X	A	I	A	I	I	I	I	A	X	I	I
Sulfuric Acid 25%	X	A	I	I	B	B	A	A	A	A	A	A	I	I	X	X	I	I	A	I	X	A	A
Sulfuric Acid 93%	X	B	I	B	X	B	X	I	I	I	X	A	A	I	I	X	X	I	I	A	B	X	B
Sulfuric Acid 93-98%	X	X	I	B	X	X	X	I	I	I	X	I	A	I	I	X	X	I	I	A	B	X	X
Sulfuric Acid Fuming	X	X	I	X	X	X	X	X	X	X	X	X	A	I	I	X	X	I	I	A	X	X	X
Sulfurous Acid 10%	X	A	I	I	A	A	A	B	B	A	A	A	A	I	I	X	X	I	I	A	I	X	A
Sulfurous Acid 10-75%	X	A	I	I	A	A	A	X	X	X	A	A	A	I	I	I	X	X	I	I	I	X	A
Sulphonate	A	X	I	X	X	X	X	I	I	I	I	X	A	I	I	I	I	I	I	A	X	A	X
Tall Oil	A	X	X	A	X	X	X	I	I	I	A	I	A	I	A	X	X	I	I	A	A	A	X
Tallow	A	X	X	I	X	X	X	I	I	I	A	I	A	A	A	I	A	A	I	A	I	A	X
Tannic Acid	B	X	A	I	A	A	A	B	B	A	A	A	A	A	X	I	X	A	A	A	I	B	X
Tar	Special Hose Required																						
Tartaric Acid	A	A	A	I	A	A	A	A	A	A	A	A	A	A	A	I	A	A	A	A	I	A	A
Tergitol	I	I	I	I	I	I	I	I	I	I	X	I	A	I	I	I	I	I	I	A	I	I	I
Tertiary Butyl Alcohol	A	A	A	B	A	A	A	B	B	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Tetrachlorobenzene	X	X	X	B	X	X	X	X	I	I	B	B	A	I	I	I	I	I	I	A	B	X	X
Tetrachloroethane	X	X	X	A	X	X	X	X	I	X	A	X	A	I	A	X	X	I	I	A	A	X	X
Tetrachloroethylene	X	X	X	A	X	X	X	X	I	X	A	A	A	I	A	B	X	I	I	A	A	X	X





# CHEMICAL RESISTANCE GUIDE

## CHEMICAL RESISTANCE GUIDE @ 70°F/20°C

RATING DEFINITIONS		X=DO NOT USE				A=CONTINUOUS SERVICE						B=INTERMITTENT USE					I=INSUFFICIENT DATA						
CHEMICAL RESISTANCE GUIDE	HOSE MATERIAL														COUPLING MATERIAL					GASKET MATERIAL			
	NITRILE	EPDM	SBR	VITON	NATURAL	HYPALON	BUTYL	PVC	TPU	TPR	UHMWPE	XLPE	TEFLON	304SS	316SS	ALUMINUM	BRASS	NYLON	POLYPROPYLENE	TEFLON	VITON	BUNA	EPDM
Tetrachloromethane	X	X	X	A	X	X	X	X	I	X	A	X	A	I	A	I	I	I	I	A	A	X	X
Tetrachloronaphthalene	X	X	I	B	X	X	X	X	I	X	B	X	A	I	I	I	I	I	I	A	B	X	X
Tetrachloronaphthalene	X	X	I	B	X	X	X	X	I	X	B	X	A	I	I	I	I	I	I	A	B	X	X
Tetradecanol	A	A	I	B	A	A	A	I	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Tetraethylene Glycol	A	A	A	A	A	A	A	B	I	I	A	A	A	I	I	I	I	I	I	A	A	A	A
Tetraethylene Lead	X	X	I	A	X	X	X	I	I	X	X	A	I	I	I	I	I	I	I	A	A	X	X
Tetrahydrofuran	X	X	I	X	X	X	X	X	X	X	B	B	A	A	A	B	X	A	X	A	X	X	X
THF	X	X	I	X	X	X	X	X	I	X	B	B	A	I	A	B	X	I	I	A	X	X	X
Thionyl Chloride	I	I	X	I	I	I	I	I	I	I	X	I	A	I	X	X	X	I	I	A	I	I	I
Tin Chloride	A	A	A	I	A	A	A	B	B	B	A	A	A	I	X	X	X	I	I	A	I	A	A
Tin Tetrachloride	A	A	A	I	A	A	A	B	B	B	B	A	A	I	X	X	X	I	I	A	I	A	A
Titanium Tetrachloride	B	X	X	A	X	X	X	I	I	I	B	A	A	I	B	X	X	I	I	A	A	B	X
Toluene	X	X	I	A	X	X	X	X	X	X	A	B	A	I	A	A	A	A	X	A	A	X	X
Toluidine	I	I	I	I	I	I	I	X	I	I	X	I	A	I	I	I	I	I	I	A	I	I	I
Toluol	X	X	I	A	X	X	X	X	X	X	A	A	A	I	A	A	A	I	I	A	A	X	X
Transformer Oil	I	I	I	I	I	I	I	I	I	I	X	I	A	I	A	I	I	I	I	A	I	I	I
Transmission Oil "A"	A	X	I	A	X	X	X	B	A	I	B	I	A	I	A	A	A	I	I	A	A	A	X
Tributoxy Ethylsulphate	X	A	I	A	X	X	A	I	I	I	I	X	I	I	I	I	I	I	I	I	A	X	A
Tributyl Amine	B	I	A	I	B	X	A	I	I	I	A	A	A	I	I	I	I	I	I	A	I	B	I
Tributyl Phosphate	X	X	X	X	X	X	A	X	X	X	A	A	A	I	A	I	X	I	I	A	X	X	X
Trichlorobenzene	X	X	X	B	X	X	X	X	X	X	B	B	A	I	I	A	I	I	I	A	B	X	X
Trichloroethane	X	X	X	A	X	X	X	X	I	X	A	X	A	I	A	I	I	I	I	A	A	X	X
Trichloroethylene	X	X	X	A	X	X	X	I	I	I	X	X	A	I	A	I	I	A	X	A	A	X	X
Trichloropropane	X	X	X	A	X	X	X	I	I	X	A	A	A	I	A	X	I	I	I	A	A	X	X
Tricresylphosphate	X	A	I	A	X	X	A	I	I	I	A	A	A	I	A	X	I	I	I	A	A	X	A
Tridecanol	A	A	I	B	A	A	A	A	I	I	A	A	A	I	I	I	I	I	I	A	B	A	A
Triethanolamine	B	A	I	X	B	X	A	B	B	I	A	A	A	I	A	I	X	A	X	A	X	B	A
Triethylamine	B	I	A	I	B	X	A	I	I	I	A	A	A	I	A	I	I	A	X	A	I	B	I
Triethylene Glycol	A	I	A	I	A	A	A	B	I	B	A	A	A	I	A	A	I	I	I	A	I	A	I
Trifluralin (Trefalin)	X	X	I	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X
Triphenyl Phosphate	X	I	X	I	X	X	A	X	B	I	A	A	A	I	A	I	I	I	I	A	I	X	I
Tripolyphosphate	I	I	I	I	I	I	I	I	I	I	X	I	A	I	I	I	I	I	I	A	I	I	I
Trisodium Phosphate	A	A	A	A	A	A	A	B	B	A	A	A	A	I	A	X	I	A	A	A	A	A	A
Turpentine	A	X	X	A	X	X	X	B	B	X	A	A	A	A	A	A	A	A	A	A	A	A	X
Undecanol	A	A	A	B	A	A	A	A	I	I	B	A	A	A	I	I	I	I	I	A	B	A	A
Urea	X	I	B	I	I	I	A	A	A	A	A	A	A	I	A	B	I	A	A	A	I	X	I
V.M.&P. Naptha	A	X	I	A	X	X	X	B	I	I	A	A	A	I	I	I	I	I	I	A	A	A	X
Vinyl Acetate	X	X	X	X	X	B	A	X	I	X	A	A	A	I	A	I	X	I	I	A	X	X	X
Vinyl Benzene	X	X	X	A	X	X	X	X	I	X	A	A	A	I	A	I	I	I	I	A	A	X	X
Vinyl Chloride	No Hose is Recommended For This Application																						
Vinyl Ether	No Hose is Recommended For This Application																						
Vinyl Toluene	X	X	X	A	X	X	X	I	I	I	A	A	A	I	I	I	I	I	I	A	A	X	X
Vinyl Arichloride	X	X	X	A	X	X	X	I	I	I	A	A	A	I	A	I	I	I	I	A	A	X	X
WaAer	A	A	I	A	A	A	A	A	A	A	A	A	A	I	A	A	A	A	A	A	A	A	A
Wax	A	X	I	X	X	X	X	I	I	I	A	X	A	I	A	I	I	I	I	A	X	A	X
WhiAe Oil	A	X	X	I	X	X	X	I	I	I	A	I	A	I	A	I	I	I	I	A	I	A	X
Wood Alcohol	A	A	I	X	A	A	A	B	B	A	A	A	A	I	A	I	I	I	I	A	X	A	A
Xylene (Xylol)	X	X	X	A	X	X	X	X	X	X	X	A	A	I	A	I	I	A	X	A	A	X	X
Xylidine	X	X	X	X	X	X	X	X	I	I	B	B	A	I	B	A	I	I	I	A	X	X	X
Zinc Carbonate	A	A	A	A	A	A	A	A	I	B	A	A	A	I	B	B	X	I	I	A	A	A	A
Zinc Chloride	A	A	A	A	A	A	A	A	A	B	A	A	A	X	A	X	X	A	A	A	A	A	A
Zinc Chromate	I	X	B	I	I	X	A	A	A	I	A	B	A	I	I	I	I	I	I	A	I	I	X
Zinc Phosphate	A	A	I	X	X	X	X	I	I	I	A	X	A	I	I	I	I	I	I	A	X	A	A
Zinc Sulfate	A	A	A	A	A	A	A	A	A	B	A	A	A	A	A	X	X	X	A	A	A	A	A

33





[www.forsaflex.com](http://www.forsaflex.com)

[Sales@Forsaflex.ca](mailto:Sales@Forsaflex.ca)

[Sales@Forsaflex.us](mailto:Sales@Forsaflex.us)